

Data Sheet for Article: AC208060--

Modular enclosure 1 door IP55 H=2000 W=800 D=600 mm

sheet steel, RAL7035, with mounting plate, four-point rod lock with push-pull handle



SCHRACK-Info

- **Material** : Frame: 1.5 mm sheet steel. Doors: Single door and double door: 2 mm sheet steel. Rear, roof and side panels: 1.5 mm sheet steel
- **Mounting plate** : 3 mm galvanised sheet steel. Double folded, mounted in the enclosure, fully adjustable in depth in 25 mm increments with the **ACMPD002** accessory.

As insertion aid of the mounting plate we recommend the use of slide-in rails **ACCLT400** (for depth 400 mm), **ACCLT500** (for depth 500 mm), **ACCLT600** (for depth 600 mm) and **ACCLT800** (for depth 800 mm). The slide-in rails are inserted in the floor, after sliding and fixing of the mounting plate they can be removed and reused in the next enclosure

- **Bottom plates** : 1 mm galvanised sheet steel, consists of
 - two-part bottom plate at depths 400 and 500 mm,
 - three-part bottom plate at depth 600 mm and
 - four-part bottom plate at depth 800 mm
- **Frame** : Folded and seam welded reversed open profile with 25 mm hole pattern according to DIN 43660. Including integrated external hole pattern
- **Door** : On single door enclosures door is mounted on four double-sided hinges allowing left- or right-hand opening. On double door enclosures, hinges are not reversible. Doors for left-hand opening have to be ordered separately. All door panels including the door mounting frame with 25 mm hole pattern. The left Z-wing is locked separately with an inner three-point lock
- **Lock** : Four-point rod lock with push-pull handle with spring adjustment and 5 mm DIN double-bit key lock (DDB), does not slide inward. The standard lock can be exchanged for profile half cylinder (DIN cylinder) and other inserts from the range of accessories. Double doors are designed with a left-side inner pivot lever

- **Rear panel** : Mounted with M6 torx screws. Replacement against additional door from the back side is possible. For 1600 mm wide enclosures the rear panel is divided
- **Side panels** : ACSW... supplied in pairs as accessory. Mounting mark visible on the side of the frame profile
- **Roof panel** : Removable
- **Earthing** : All panels are earthed through their fittings and are equipped with a separate earthing stud
- **Degree of protection** : Single door and double door IP55
- **Impact resistance** : IK10
- **Finish** : Textured powder coating
- **Color** : RAL7035 (Light grey)
- **Delivery includes** : Frame with fitted door, rear panel, roof panel, bottom plates, mounting plate with fixing material for the nearest position of the rear panel and earthing studs. Delivered on a pallet with equal width as the enclosure to enable bayging while still on the pallet. All packing material is recyclable. In 400 mm wide enclosures a mounting plate, bottom plates and door frame are not included
- **Mounting requirement** : Standard delivery ready for combined installation. For stand-alone installation add side panels




Technical Data

Net width (mm)	800,00
Net height (mm)	2.000,00
Netto depth (mm)	600,00
Net weight (kg)	127,00
Min. ambient temperature (°C)	-10
Max. ambient temperature (°C)	60
IP Rating	IP55
Protection class	I
Material	sheetsteel
Colour	RAL 7035 (Light grey)
Width (mm)	800
Height (mm)	2000
Depth (mm)	600
Corpus wall thickness (mm)	1,50
Mounting plate	galvanized sheet steel 3mm
Mounting plate wall thickness (mm)	3
Mounting plate width (mm)	697
Mounting plate height (mm)	1891
Mounting plate depth (mm)	3
Door wall thickness (mm)	2
Number of bottom plates	3
Load capacity per door (kg)	100
Number of doors	1
Bottom plates width (mm)	630
Product category	Modular enclosure
Total Load Capacity (kg)	1500

Technical Data - continued

Mounting Plate Load Capacity (kg)	1500
Power loss (W)	-976,00

Dimension drawing

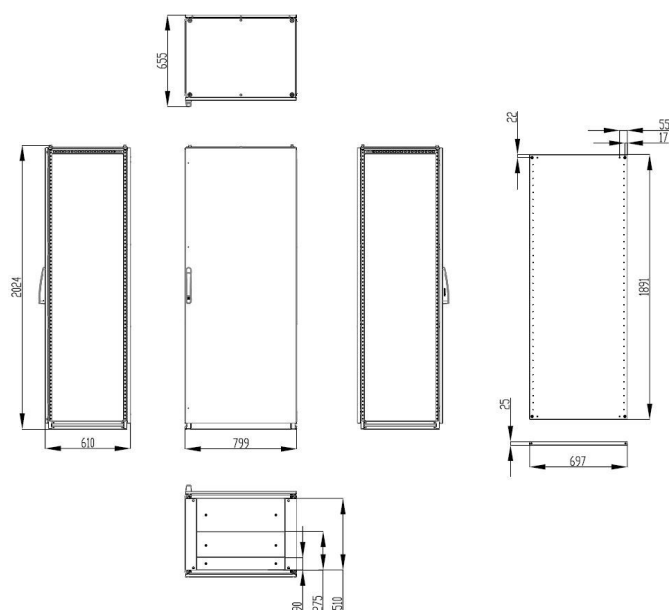

Article Table

DESCRIPTION	Order No.
Modular enclosure 1 door IP55 H=2000 W=800 D=600 mm sheet steel, RAL7035, with mounting plate, four-point rod lock with push-pull handle	AC208060
Optional Accessories	
LED lighth for EC, infra (not available in this country)	IU006519CZ
Side panels (pair) H=2000 D=600 mm sheet steel RAL7035	ACSW2006
Plinth side parts (pair) with corner parts D=600 H=100 mm preassembled, sheet steel RAL9005 (Jet black)	ACSOT061
Plinth front and rear part W=800 H=100 mm sheet steel PU=2 pieces, RAL9005 (Jet black)	ACSOB081
Plinth side parts (pair) with corner parts D=600 H=200 mm preassembled, sheet steel RAL9005 (Jet black)	ACSOT062
Plinth front and rear part W=800 H=200 mm sheet steel PU=2 pieces, RAL9005 (Jet black)	ACSOB082

Article Table

DESCRIPTION	Order No.
Optional Accessories	
Roof panel for cable gland plates W=800 D=600mm Suitable for AC/KC enclosures, Gland plates: WSTBT2117G, WSTBT2125G, WSTBT2130G, WSTBT2135G, WSTBT2150G, IG712100, IG712102, IG712200, IG712205, IG712211, IG712222, IG712223, IG712512, IG712516	ACRCE0806
Slide-in rails for mounting plates in 600 mm deep enclosures of series AC and KC, PU=1 pair	ACCLT600
Baying kit for inside and outside mounting with 4x baying brackets and mounting accessories	ACCCI060
Gasket tape made of Polyethylene PE-01, IP55	ACSPDG01
Eye bolts M12 for lifting of AC and KC enclosures PU=4 pieces	ACLE9301
Document pocket, self-adhesive and screwable, DIN A4	ASDRA400
Push-pull handle in black with spring adjustment without insert	ACLSC502
Adapter for half cylinder locks DIN18252 for push-pull handles of enclosure series AC, KC, AT and KT	ASLS2100
Adapter plate push-button insert for AC/KC enclosures	ASLSSI537
Cage nuts M6 (PU=10 pcs.)	ACCNM615
Fillister head screws M6x16 according to ISO 7380 PU=10 pieces	ACCNK006
Cage nuts M8 (PU=10 pcs.)	ACCNM815
Fillister head screws M8x16 according to ISO 7380 PU=10 pieces	ACCNK008
DIN-rail low, unperforated, sendzimir zincd Price per piece	BK14004--B
DIN-rail low, perforated, sendzimir zincd Preis pro Stück	BK14005--A
DIN-rail high, unperforated, sendzimir zincd DIN-rail high, unperforated, sendzimir zincd	IL14035--A
DIN-rail high, Long Hole 18x6.3mm, sendzimir zincd Price per piece	IL14037
Key for 5mm double-bit insert PU=1 piece	DV903532