

Data Sheet for Article: BK003524--

Wall-mounting distribution board, 4-row - 48MW, without door

IP40, Protectionclass II, 24+4MW, RAL 9003, H=650, W=310, D=96mm



SCHRACK-Info

- Wall-mounted domestic consumer unit enclosures in ABS without doors
- Installation of sheet steel door with door clip possible
- Includes PE and N terminals
- Protection class II
- Halogen free according to RoHS
- Rated voltage 400VAC / In=63A
- Ambient temperature: -25° to +60°C
- Glow wire test: 650°C
- Degree of protection IP40, Impact resistance: IK08
- RAL9003 Signal white



Technical Data

Net width (mm)	310,00
Net height (mm)	650,00


Technical Data - continued

Netto depth (mm)	96,00
Net weight (kg)	2,54
EAN	9004840970272
Power loss (W)	-36,00
Min. ambient temperature (°C)	-25
Max. ambient temperature (°C)	40
Halogen-free	Yes
Version	wall mounted without door
Rows	4
MW per row	12
IP Rating	IP40
Colour	RAL 9003 (signal white)

Datei Tabelle: Wall-mounting distribution board, 4-row - 48MW, without door

Article number	A[mm]	B[mm]	C[mm]	D[mm]	E[mm]	Rows	MW	N-terminal[mm²]	PE-terminal[mm²]	Radiant power loss[W]*
BK003521	251	310	96	-	-	1	12+2	2x10	2x10	-22
BK003522	377	310	96	-	-	2	24+4	2x13	2x13	-26
BK003523	502	310	96	-	-	3	36+6	2x15	2x15	-30
BK003524	650	310	96	-	-	4	48+8	2x20	2x20	-36
BK003501	-	-	-	224	283	-	-	-	-	-
BK003502	-	-	-	350	283	-	-	-	-	-
BK003503	-	-	-	490	283	-	-	-	-	-
BK003504	-	-	-	618	283	-	-	-	-	-

Dimensioned drawing: Wall-mounting distribution board, 4-row - 48MW, without door

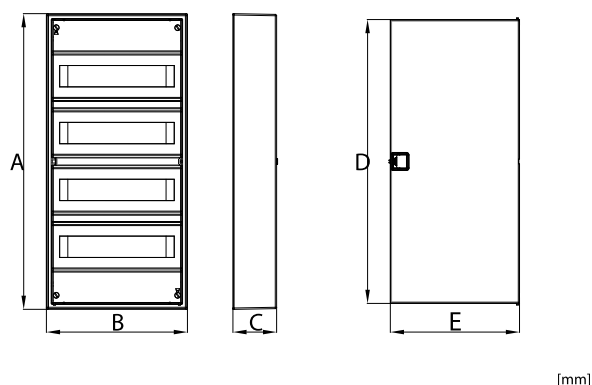

Article Table

DESCRIPTION	Order No.
Wall-mounting distribution board, 4-row - 48MW, without door IP40, Protectionclass II, 24+4MW, RAL 9003, H=650, W=310, D=96mm	BK003524
Optional Accessories	
Sheet steel door for BK003524, 4-rows	BK003504