

Data Sheet for Article: BK050210--

Distribution Board 4-row, 72MW, IP65, transparent door

Wall Mounted Distribution box halogen-free, UV stabilized, 1500VDC, material ABS, including neutral conductor and grounding rails, cable entry at top 12xM20, 6xM25, 2xM32, 1xM40, at bottom 12xM20, 6xM25, 2xM32, 1xM40, at the side 4xM25



SCHRACK-Info


- Wall-mounted enclosures with transparent door inclusive UV-Protection
- Lock: Pressure-operated mechanism, a small cylinder can be installed
- Includes PE and N terminals
- Protection class II
- Halogen-free plastic materials
- UV stability and weather resistant
- Rated voltage 1000VAC, 1500VDC
- Ambient temperature: -25° to +40°C
- Glow wire test: 650°C
- Material: ABS
- Degree of protection IP65
- Resistance to impact: IK08
- RAL7035 light grey



Technical Data

Net width (mm)	418,00
Net height (mm)	872,00
Netto depth (mm)	148,00
Net weight (kg)	7,10
EAN	9007985018861
Power loss (W)	-110,00
Min. ambient temperature (°C)	-25
Max. ambient temperature (°C)	60
Rows	4

Dimensioned drawing: Distribution Board 4-row, 72MW, IP65, transparent door

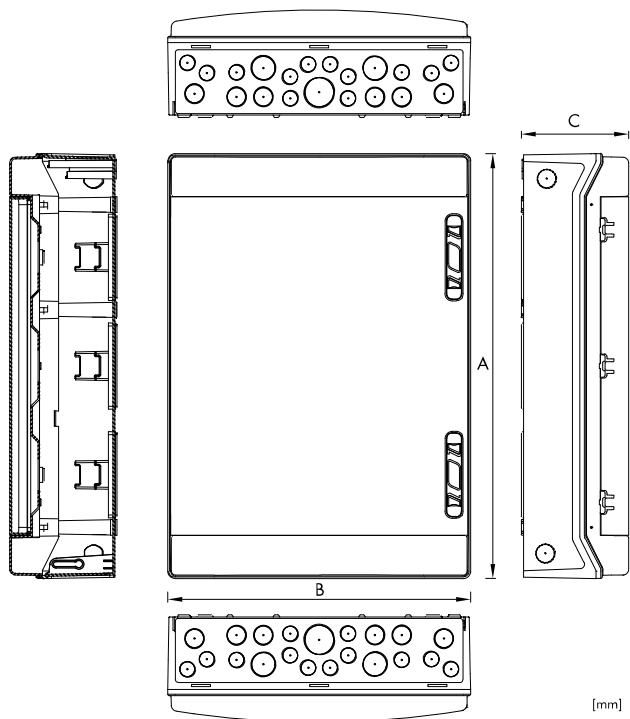

AP-Wohnungsverteiler Serie BK050xx, IP65, transparente Tür

Article number	A [mm]	B [mm]	C [mm]	Rows	MW	Radiant power loss [W] *
BK050200	231	166	113	1	4	-10
BK050201	231	238	118	1	8	-23
BK050202	246	310	148	1	12	-33
BK050203	436	310	148	2	24	-52
BK050204	586	310	148	3	36	-67
BK050205	436	418	148	2	36	-64
BK050206	286	418	148	1	18	-46
BK050207	231	202	113	1	6	-20
BK050208	586	418	148	3	54	-82
BK050209	870	310	148	4	48	-95
BK050210	872	418	148	4	72	-110

* max. radiated power of housing calculated as a wall-mounted single fixed with $\Delta T = 35K$.

Detailed information and legal notes see page

Article Table

DESCRIPTION	Order No.
Distribution Board 4-row, 72MW, IP65, transparent door	
Wall Mounted Distribution box halogen-free, UV stabilized, 1500VDC, material ABS, including neutral conductor and grounding rails, cable entry at top 12xM20, 6xM25, 2xM32, 1xM40, at bottom 12xM20, 6xM25, 2xM32, 1xM40, at the side 4xM25	BK050210
Optional Accessories	
Half cylinder lock for BK05, IP65	BK050097
Cable bushing M25x1.5 for BK05	
Cable bushing for connecting enclosures	BK050098
Cable bushing M40x1.5 for BK05	
Cable bushing for connecting enclosures	BK050099