

Data Sheet for Article: BK080055--

Flush-mounted enclosure 1-row, 4MW, IP40, white door

H=230 W=138 D=100mm, protection class 2, ABS, halogen free, RAL 9003



SCHRACK-Info

- Flush-mounted domestic consumer unit enclosures in ABS with solid plastic doors
- Lock: push-button, a small cylinder can be installed
- Includes PE and N terminals
- Protection class II
- Halogen free according to RoHS
- Rated voltage 400VAC / In=63A
- Ambient temperature: -25° to +60°C
- Glow wire test: 650°C
- Recess depth: 68-70mm
- Degree of protection: IP40, Impact resistance: IK08
- RAL9010 pure white

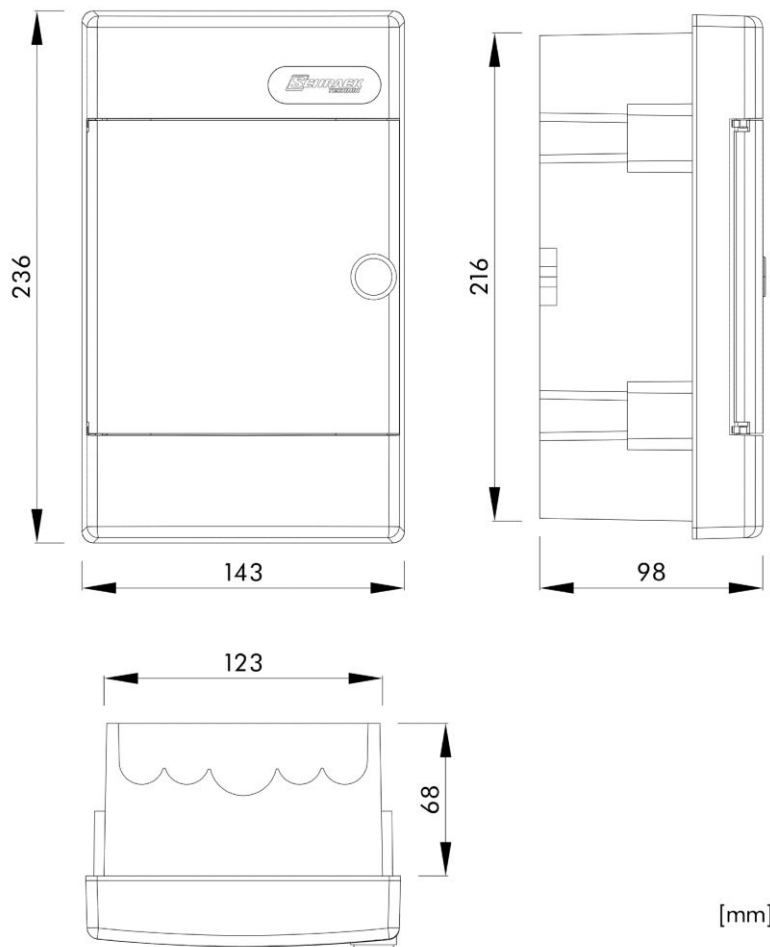


Technical Data

Net width (mm)	138,00
----------------	--------

Technical Data - continued

Net height (mm)	230,00
Netto depth (mm)	100,00
Net weight (kg)	0,49
EAN	9004840908367
Power loss (W)	-9,00
Min. ambient temperature (°C)	-25
Max. ambient temperature (°C)	60
Door material	Plastic
Halogen-free	Yes
Version	Flush-mounted with door
Rows	1
MW per row	4
IP Rating	IP40
Colour	RAL 9010 (Pure white)

Dimensioned drawing: Flush-mounted enclosure 1-row, 4MW, IP40, white door

Article Table

DESCRIPTION	Order No.
Flush-mounted enclosure 1-row, 4MW, IP40, white door H=230 W=138 D=100mm, protection class 2, ABS, halogen free, RAL 9003	BK080055
Optional Accessories	
Round cylinder sash lock 2233 for TOPO BK0800 + BK0801 metal, 2x keys included	BK080096