

Data Sheet for Article: BK080108--

Wall-mounted enclosure 4-rows, 72MW, IP40, transparent door

H=654 W=395 D=112mm, protection class 2, ABS, halogen free, RAL 9003



SCHRACK-Info

- Wall-mounted domestic consumer unit enclosures in ABS with transparent doors
- Lock: push-button, a small cylinder can be installed
- Includes PE and N terminals
- Protection class II
- Halogen free according to RoHS
- Rated voltage 400VAC / In=63A
- Ambient temperature: -25° to +60°C
- Glow wire test: 650°C
- Degree of protection: IP40, Impact resistance: IK08
- RAL9010 pure white




Technical Data

Net width (mm)	395,00
Net height (mm)	654,00

Technical Data - continued

Netto depth (mm)	112,00
Net weight (kg)	3,00
EAN	9004840875225
Power loss (W)	-68,00
Min. ambient temperature (°C)	-25
Max. ambient temperature (°C)	60
Door material	Plastic, transparent
Halogen-free	Yes
Version	wall mounted with door
Rows	4
MW per row	18
IP Rating	IP40
Colour	RAL 9003 (signal white)

**Dimensioned drawing: Wall-mounted enclosure 4-rows, 72MW, IP40,
transparent door**

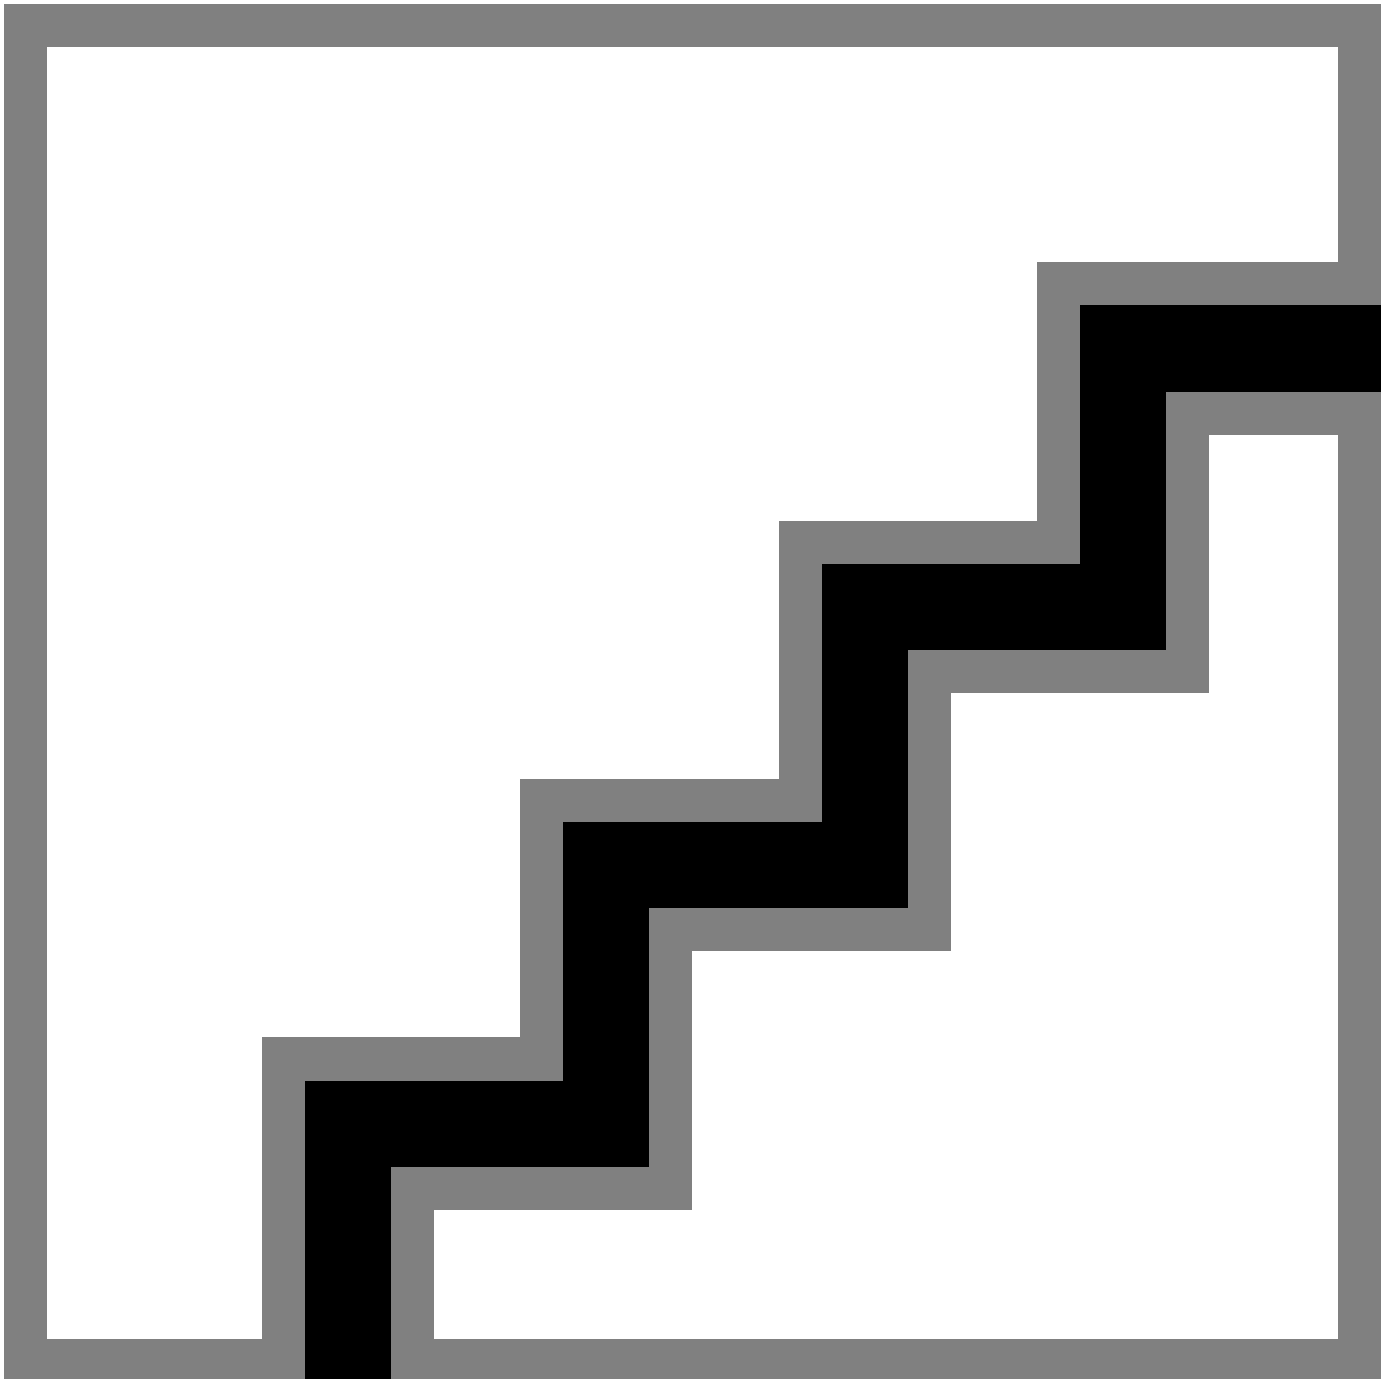

Datei Tabelle: Wall-mounted enclosure 4-rows, 72MW, IP40, transparent door

Article number									
Door		A	B	C	D	E	Rows	MW	Radiant power loss [W] *
Transparent	White	[mm]	[mm]	[mm]	[mm]	[mm]			
BK080110	BK080160	235	143	97	127	46	1	4	-13
BK080100	BK080150	235	215	101	120	120	1	8	-18
BK080101	BK080151	235	287	112	107	180	1	12	-23
BK080104	BK080154	235	395	112	107	289	1	18	-29
BK080109	BK080159	235	502	112	107	395	1	24	-36
BK080102	BK080152	361	287	112	232	180	2	24	-32
BK080106	BK080156	361	395	112	232	289	2	36	-41
BK080103	BK080153	525	287	112	357	180	3	36	-44
BK080107	BK080157	525	395	112	357	289	3	54	-56
BK080105	BK080155	650	287	112	482	180	4	48	-54
BK080108	BK080158	654	395	112	482	289	4	72	-68

* Max. radiated power of housing calculated as a wall-mounted single fixed with $\Delta T = 35K$. Detailed information and legal notes see page 2

Article Table

DESCRIPTION	Order No.
Wall-mounted enclosure 4-rows, 72MW, IP40, transparent door H=654 W=395 D=112mm, protection class 2, ABS, halogen free, RAL 9003	BK080108
Optional Accessories	
Round cylinder sash lock 2233 for TOPO BK0800 + BK0801 metal, 2x keys included	BK080096