

Data Sheet for Article: BK080158--

Wall-mounted enclosure 4-rows, 72MW, IP40, white door

H=654 W=395 D=112mm, protection class 2, ABS, halogen free, RAL 9003



SCHRACK-Info

- Wall-mounted domestic consumer unit enclosures in ABS with solid plastic doors
- Lock: push-button, a small cylinder can be installed
- Includes PE and N terminals
- Protection class II
- Halogen free according to RoHS
- Rated voltage 400VAC / In=63A
- Ambient temperature: -25° to +60°C
- Glow wire test: 650°C
- Degree of protection: IP40, Impact resistance: IK08
- RAL9010 pure white




Technical Data

Net width (mm)	395,00
Net height (mm)	654,00

Technical Data - continued

Netto depth (mm)	112,00
Net weight (kg)	3,00
EAN	9004840908336
Power loss (W)	-68,00
Min. ambient temperature (°C)	-25
Max. ambient temperature (°C)	60
Door material	Plastic
Halogen-free	Yes
Version	wall mounted with door
Rows	4
MW per row	18
IP Rating	IP40
Colour	RAL 9003 (signal white)

Dimensioned drawing: Wall-mounted enclosure 4-rows, 72MW, IP40, white door

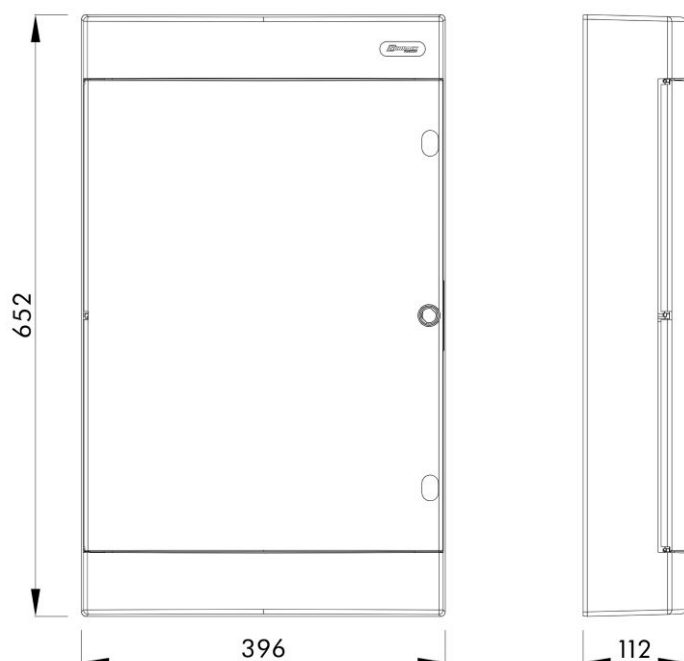

[mm]

Article Table

DESCRIPTION	Order No.
Wall-mounted enclosure 4-rows, 72MW, IP40, white door H=654 W=395 D=112mm, protection class 2, ABS, halogen free, RAL 9003	BK080158
Optional Accessories	
Round cylinder sash lock 2233 for TOPO BK0800 + BK0801 metal, 2x keys included	BK080096