


Media combi frame and door, vertical 5-rows, 3 DIN-rails

series Gemini, upper section installation part with 3x DIN-rails (42MW), lower section media part 110mm high with 1x plastic mounting plate, with 1x integrated socket, without wall box, WLAN proofed, IP30, RAL9003 (Signal white), integrated socket not approved for sale in Switzerland

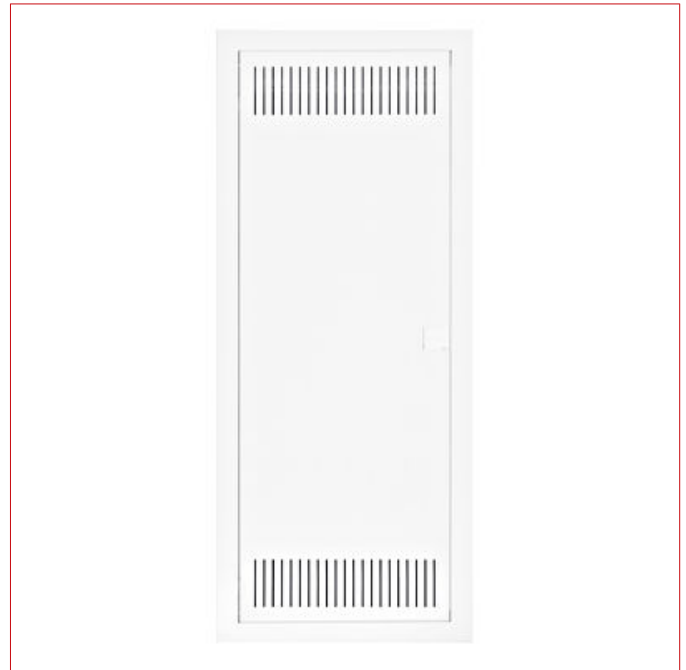

SCHRACK-Info

- Media combi-enclosures for partition wall or solid wall in two versions:
 - **Horizontal 3- to 5-rows** as well as
 - **Vertical 3- to 5-rows**
- **Horizontal designs:**
 - **BK0856032K** : 3x DIN-rails (36+6MW) and 3x mounting plates
 - **BK0856042K** : 4x DIN-rails (48+8MW) and 4x mounting plates
 - **BK0856052K** : 5x DIN-rails (60+10MW) and 5x mounting plates
- For completion, the following articles are necessary:
 - 1x Frame with door and insert (3-, 4- or 5-row)
 - 2x Wall boxes (3-, 4- or 5-row for solid wall or partition wall)
 - 1x Wall box brackets horizontal BK085098-A
- **Vertical designs:**
 - **BK0855032K** : 1x DIN-rail (12+2MW), 2x mounting plates and 1x built-in socket
 - **BK0855042K** : 2x DIN-rails (24+4MW), 2x mounting plates and 1x built-in socket
 - **BK0855053K** : 2x DIN-rails (24+4MW), 3x mounting plates and 1x built-in socket


- **BK0855052K** : 3x DIN-rails (36+6MW), 2x mounting plates and 1x built-in socket
- For completion, the following articles are necessary:
 - 1x Frame with door and insert (3-, 4- or 5-row)
 - 1x Wall box (3-, 4- or 5-row for solid wall or partition wall)
- **General information :**
 - WLAN proofed
 - Frames and doors in coated sheet steel, all doors with door clip
 - Horizontal versions: Media door side with ventilation slots
 - Vertical versions: Door with ventilation slots as standard
 - Frame design high (ca. 6 mm)
 - Mounting plates for active and passive components included
 - Glow wire test:
 - Resistant to abnormal heat and fire up to 850 °C for partition wall
 - Resistant to abnormal heat and fire up to 650 °C for solid wall
 - Mounting brackets (included):
 - For partition wall (up to 30 mm wall thickness)
 - For solid wall (Dovetail mounting brackets for front or back panel mounting)
 - Protection class: II
 - Degree of protection: IP30
 - Impact Resistance: IK08
 - Color: RAL9003 (Signal white)




Technical Data

Net width (mm)	346,00
Net height (mm)	842,00
Netto depth (mm)	36,00
Net weight (kg)	5,00
EAN	9004840977806
Power loss (W)	-61,00
Min. ambient temperature (°C)	-25
Max. ambient temperature (°C)	60
Halogen-free	Yes
Protection class	2
Impact Resistance	IK08

Dimensioned drawing: Media combi frame and door, vertical 5-rows, 3 DIN-rails

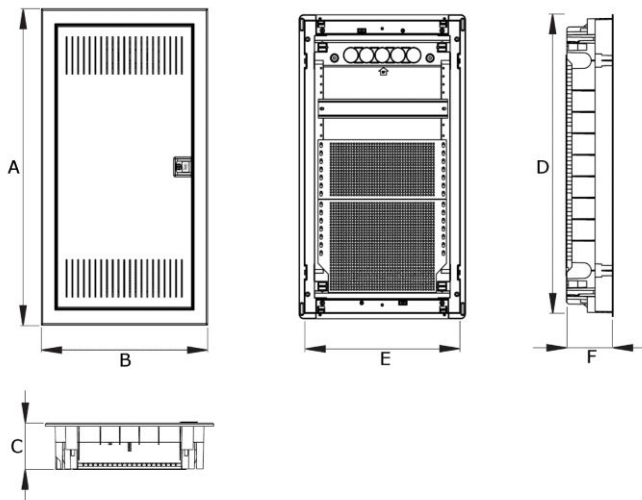

Dimensioned drawing: Media combi frame and door, vertical 5-rows, 3 DIN-rails

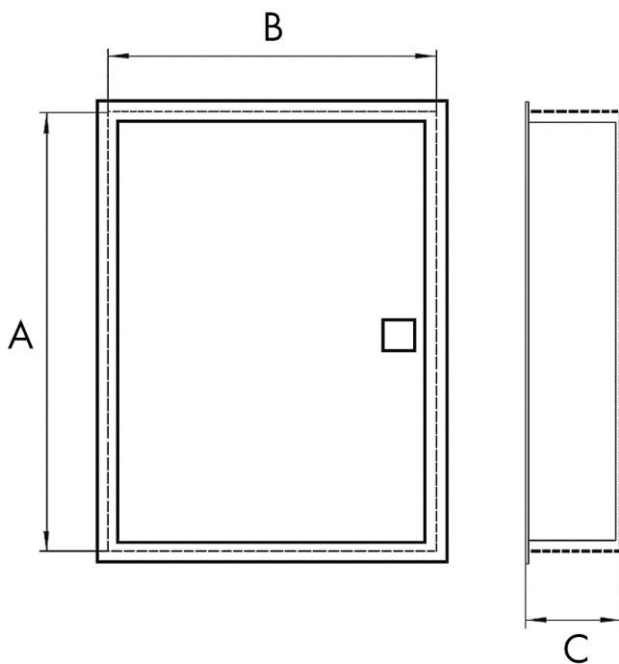

Datei Tabelle: Media combi frame and door, vertical 5-rows, 3 DIN-rails

Artikelnummer	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	Reihen	DIN-Schienen	TE	Montageplatten	Verlustleistung[W]*
BK0855032F	592	346	94	549	306	87	3	1	14	2	-45
BK0855042F	717	346	94	673	306	87	4	2	28	2	-54
BK0855052F	842	346	94	817	306	87	5	3	42	2	-61

* Max. Abstrahlleistung des Gehäuses, berechnet als Einzelgehäuse bei Wandeinbau und $\Delta T = 35K$.

Detailinformationen und Rechtshinweise siehe Seite ?

Datei Tabelle: Media combi frame and door, vertical 5-rows, 3 DIN-rails

Artikelnummer		Putznische			Hohlwandausschnitt		Reihen	DIN-Schienen	TE
Mauerwannen		A	B	C	A	B			
Mauerwerk	Hohlwand	[mm]	[mm]	[mm]	[mm]	[mm]			
BK0850032A	BK0850532A	562	320	90	533	310	3	1	14
BK0850042A	BK0850542A	685	320	90	677	310	4	2	28
BK0850052A	BK0850552A	808	320	90	800	310	5	3	-42

Article Table

DESCRIPTION	NVP (%)	COPPER WEIGHT (kg/km)	Order No.
Media combi frame and door, vertical 5-rows, 3 DIN-rails series Gemini, upper section installation part with 3x DIN-rails (42MW), lower section media part 110mm high with 1x plastic mounting plate, with 1x integrated socket, without wall box, WLAN proofed, IP30, RAL9003 (Signal white), integrated socket not approved for sale in Switzerland			BK085052K
Necessary Accessories			
Wall box for partition wall, 5-rows, 70 module widths for 5-row BK085 flush-mounting enclosures, BK0857 media enclosures and BK0855 media combi-enclosures (vertical), height=817 width=324 depth=87mm			BK085052A
Wall box for solid wall, 5-rows, 70 module widths for 5-row BK085 flush-mounting enclosures, BK0857 media enclosures and BK0855 media combi-enclosures (vertical), height=817 width=324 depth=87mm			BK0850052A
Optional Accessories			
Double socket 16A, 250VAC, with mounting bracket for BK0855 = media combi-enclosures (vertical), BK0856 = media combi-enclosures (horizontal), BK0857 = flush-mounted media enclosures, BK0807 = wall-mounted media enclosures, integrated socket not approved for sale in Switzerland			BK085050
Device holder for media enclosures BK0855, 0856, 0857+BK0807 BK0855 = media combi-enclosures (vertical), BK0856 = media combi-enclosures (horizontal), BK0857 = flush-mounted media enclosures, BK0807 = wall-mounted media enclosures			BK085094-A
Connection bracket set vertical (PU=2 pcs.) for BK085 for the vertical connection of all wall boxes series BK085, made of ABS			BK085095
DIN-rail in a particularly flat design for BK085 enclosures for devices with a large installation depth (e.g. surge protective devices), for BK085 = flush-mounted installation enclosures, BK0855 = media combi-enclosures (vertical), BK0856 = media combi-enclosures (horizontal) and BK0857 = flush-mounted media enclosures			BK085099
Round cylinder sash lock 2233X for BK085 + TOPO Media BK0807 metal, 1x key included			BK085097

Article Table

DESCRIPTION	NVP (%)	COPPER WEIGHT (kg/km)	Order No.
Optional Accessories			
Key 2233X (1 piece) for sash lock BK085097 suitable for round cylinder sash lock 2233X (metal) for BK085 enclosures			BK085093
Spare part kit for BK085 frame and door includes: 1x door clip, 2x door hinges, 1x 6-point frame fixing, 2x screws for device front cover			BK085090
Spare part kit for BK085 wall box (partition and solid wall) includes: 4x partition wall anchors, 4x solid wall fixings			BK085091
DIN-rail adapter empty for 1 module (SFA)(SFB), RAL7035 Lightgrey			HSEH010GS
TOOLLESS LINE Jack RJ45 shielded, Cat.6a 10GB 4PPoE 100W (SFA)			HSEMRJ6GWA
S/FTP Cable Cat.7, 4x2xAWG23/1, 1.000MHz, LS0H-3, Cca, 50% blue RAL5015, Sale per meter	79	28	HSEKP423CB
Single built-in socket for series Gemini enclosures vertical for additional installation in BK0855 media combi-enclosures (vertical), integrated socket not approved for sale in Switzerland			BK085049