

Data Sheet for Article: BK085745--

Flush-mounted media enclosure 5-rows - partition wall

1x DIN-rail (14 module widths), 4x mounting plates, IP30, RAL9003 (Signal white)



SCHRACK-Info


- 5-row media enclosure for partition wall
- Frame and door in coated sheet steel, media distributor door with ventilation slots and door clip; Wall box made of ABS, halogen free
- 4-point frame fixing for plaster compensation (optionally 6-point frame fixing is possible)
- With a DIN-rail (14 module widths) on top of each enclosure for insertion of patch modules
- Mounting plates for active and passive components included
- Device holder (BK085094), double socket 16A (BK085050) and wall box brackets horizontal (BK085098-A) as well as vertical (BK085095) can be obtained as accessory
- Glow wire test: Resistant to abnormal heat and fire up to 850 °C for partition wall
- Mounting brackets for partition wall up to 30 mm wall thickness
- Delivery includes: Frame with door, wall box, 1x DIN-rail, 4x mounting plates, plaster cover, mounting equipment for partition wall mounting and mounting instruction
- Protection class: II
- Degree of protection: IP30
- Color: RAL9003 (Signal white)



Technical Data

Net width (mm)	346,00
Net height (mm)	842,00
Netto depth (mm)	94,00
Net weight (kg)	4,00
EAN	9004840881011
Power loss (W)	-61,00
Min. ambient temperature (°C)	-25
Max. ambient temperature (°C)	60
Version	Flush-mounted partition wall with door
Door material	Sheet steel
Rows	5
IP Rating	IP30
Colour	RAL 9003 (Signalweiß)

Dimensions

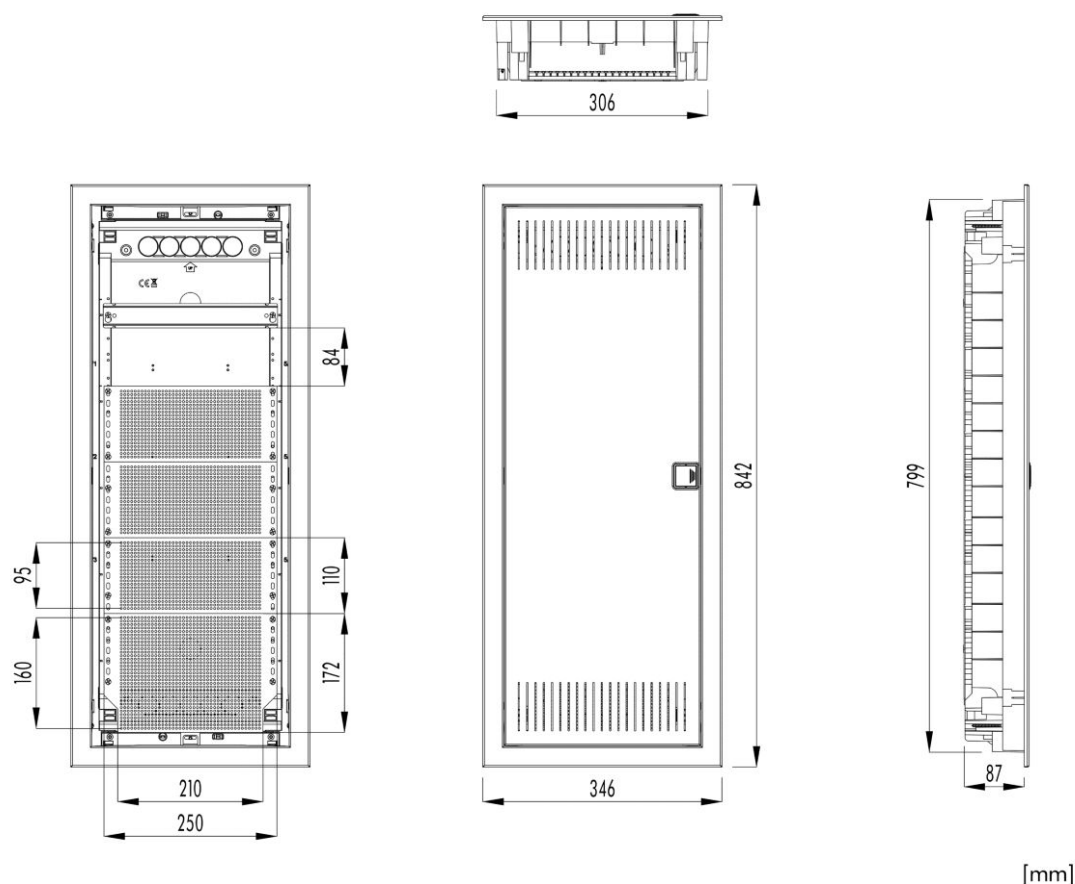

Article Table

DESCRIPTION	NVP (%)	COPPER WEIGHT (kg/km)	Order No.
Flush-mounted media enclosure 5-rows - partition wall 1x DIN-rail (14 module widths), 4x mounting plates, IP30, RAL9003 (Signal white)			BK085745
Optional Accessories			
Double socket 16A, 250VAC, with mounting bracket for BK0855 = media combi-enclosures (vertical), BK0856 = media combi-enclosures (horizontal), BK0857 = flush-mounted media enclosures, BK0807 = wall-mounted media enclosures, integrated socket not approved for sale in Switzerland			BK085050
Device holder for media enclosures BK0855, 0856, 0857+BK0807 BK0855 = media combi-enclosures (vertical), BK0856 = media combi-enclosures (horizontal), BK0857 = flush-mounted media enclosures, BK0807 = wall-mounted media enclosures			BK085094-A
Connection bracket set horizontal (PU=2 pcs.) for BK085 for the horizontal connection of all wall boxes series BK085 in the same dimension, made of ABS			BK085098-A
Connection bracket set vertical (PU=2 pcs.) for BK085 for the vertical connection of all wall boxes series BK085, made of ABS			BK085095
Round cylinder sash lock 2233X for BK085 + TOPO Media BK0807 metal, 1x key included			BK085097
Spare part kit for BK085 frame and door includes: 1x door clip, 2x door hinges, 1x 6-point frame fixing, 2x screws for device front cover			BK085090
Spare part kit for BK085 wall box (partition and solid wall) includes: 4x partition wall anchors, 4x solid wall fixings			BK085091
DIN-rail in a particularly flat design for BK085 enclosures for devices with a large installation depth (e.g. surge protective devices), for BK085 = flush-mounted installation enclosures, BK0855 = media combi-enclosures (vertical), BK0856 = media combi-enclosures (horizontal) and BK0857 = flush-mounted media enclosures			BK085099
DIN-rail adapter empty for 1 module (SFA)(SFB), RAL7035 Lightgrey			HSEH010GS
TOOLLESS LINE Jack RJ45 shielded, Cat.6a 10GB 4PPoE 100W (SFA)			HSEMRJ6GWA
S/FTP Cable Cat.7, 4x2xAWG23/1, 1.000MHz, LS0H, Dca 40% blue Sale per meter	78	28	HSEKP423HB