

Data Sheet for Article: BSB00060--

Busbar, 1xRCCB 4-pole, 4xSPD, 8MW (MW=17,8mm), 16mm²

Compact-Busbar, Forkbusbar, 4-pole, not possible to break off, the shortening is not possible, no end caps required



Schrack-Info

- Compact-Busbar for wiring of devices with: Dual-function terminal, screw terminal, screw connection, bracket terminal, flat terminal
- Division unit 17.8mm
- 8 MW
- Phase sequence: L1, L2, L3, N, L1, L2, L3, N (other applications possible)
- No end caps required


Technical Data

Cross-section (mm ²)	10
Product standard	EN 61439-1
Max. current beginning	80A
Max. current middle	130A
Material	E-Cu-ETP
Insulation material	PC
Halogen-free	According DIN EN 50267-2-2


Technical Data - continued

Temperature range - Operation (°C)	till 125
Glow wire resistance (°C)	960
Overvoltage category	3
Rated impulse withstand voltage [Uimp] (V)	4k
Rated voltage	400V-AC
Short circuit withstand	100Agl / 25 kA
Dielectric strength	36kV/mm
Pollution degree	2
Climatic proofing	IEC 68-2
Fire classification	2
Tracking resistance	CTI 600
Power loss (W)	3,00


Dimensions in mm

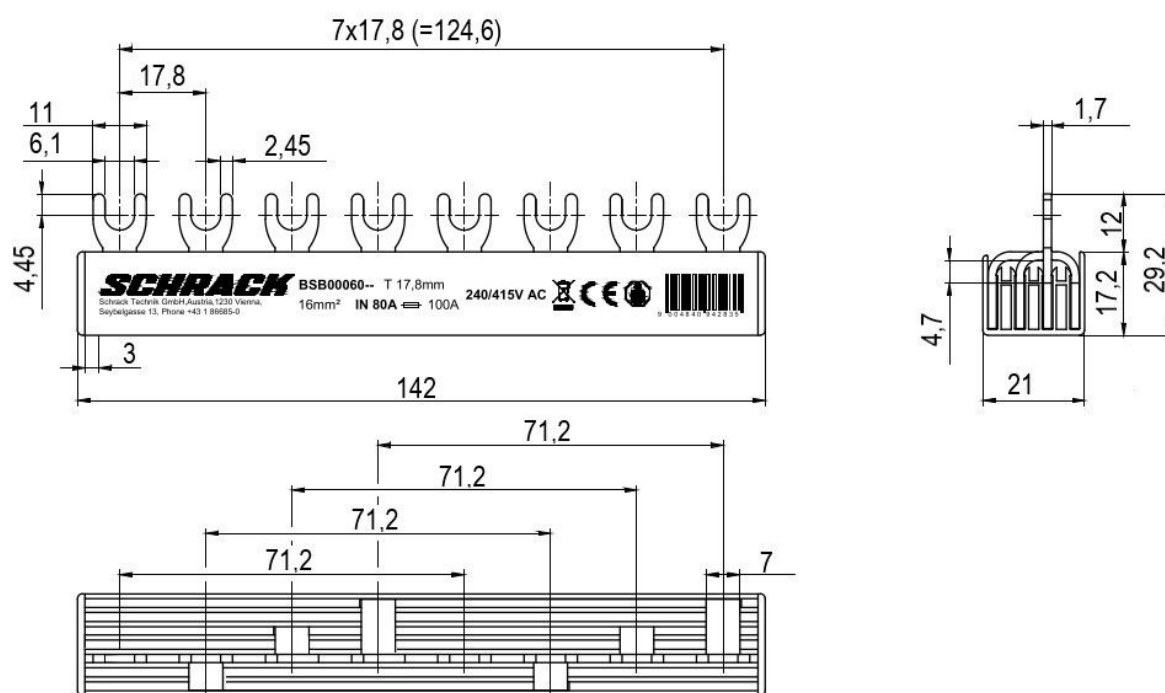

Feeding at beginning or end of busbar

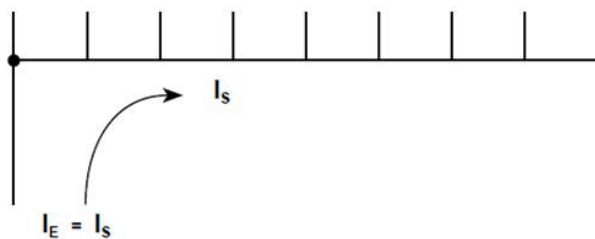

Other feedings

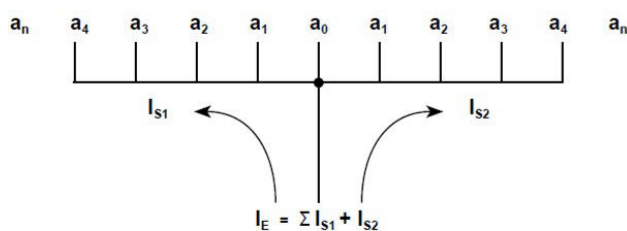

Article Table

DESCRIPTION	Order No.
Busbar, 1xRCCB 4-pole, 4xSPD, 8MW (MW=17,8mm), 16mm²	BSB00060
Compact-Busbar, Forkbusbar, 4-pole, not possible to break off, the shortening is not possible, no end caps required	
Optional Accessories	
Protection-cover yellow	BSB00303
Cover for reserve spaces on the busbar	