

Data Sheet for Article: DTWI206060

Network Enclosure Wall, IP55 Indoor, W600 H1018 D600, 19" 20U

grey, RAL7035, Glassdoor



SCHRACK-Info

Network wallmount 19" IP55 Indoor Cabinets are designed for industrial applications. Based on EN60529 provides IP55 protection class against dust and water ingress.

The enclosure provides IP55 protection against dust and water.

After installation of fans or filters, IP54 is still met.

Application areas are semi-open areas like factories, warehouses, lean-to roof conditions, without no direct rain and environmental effects. Totally gasketed doors, IP55 performing swing handle locking with 3 point locking system and isolated cable entries provide best performance for water and dust ingress.

1,5 mm thick material monoblock welded construction, with epoxy polyester type powder coating which is RAL7035 Light Grey color, provides the corrosion resistance.

Passive ventilation via filtered inlets.

TECHNICAL DATA


- Colour: RAL7035 Light Grey
- Front door opening angle is up to 140 degrees. Front door has an infused sealing gasket structure which provides excellent IP protection even under cold/hot weather conditions. The front door is grounded to the main body with yellow/green 4,0 mm diameter copper wire.
- Height: 20U
- Width: 600mm

- Depth: 600mm
- Maximum Load: 100kg
- Door: Glass door including keyed swing lock handle with 3point locking system provides security and anti-vandal structure, also maintaining the IP55 protection
- Included are 4 pcs. 3,0 mm thick wall mounts with matching washer and screws, as well as a cable entry flange with three glands: 2x PG21, 1 x PG48, 2 x PVC blind caps with 28mm diameter (installed in the floor) and a blind flange (accessory pack).
- Filters are included
- Cabinets are delivered with: 1 set = 2pcs 19" front rails. A second pair of 19" DTWIPROFxx rails for rear mounting is available as an option. This is required for 4-point mounting of heavy equipment.


Technical Data

Net width (mm)	600,00
Net height (mm)	1.018,00
Netto depth (mm)	600,00
Net weight (kg)	50,00
Min. ambient temperature (°C)	5
Max. ambient temperature (°C)	40
Suitable for enclosure width (mm)	600
Height (mm)	1018
Colour	RAL 7035 (Light grey)
Basic Description	Enclosure


Dimensioned drawing: Network Enclosure Wall, IP55 Indoor, W600 H1018 D600, 19" 20U




Top view

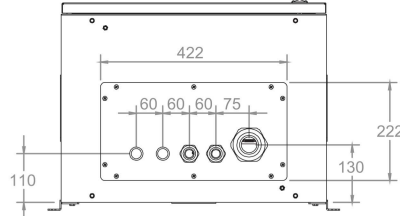


Bottom view

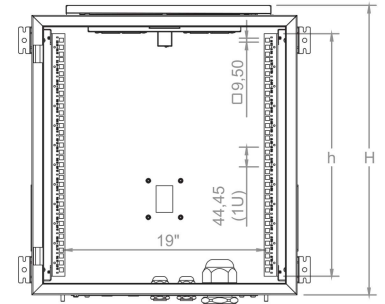


Inside view

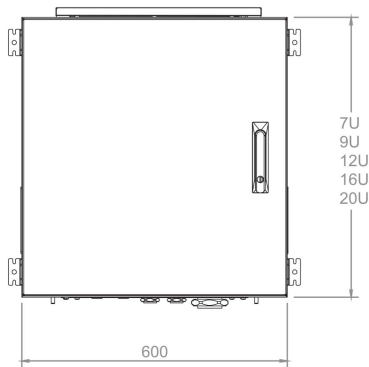


Front view




Side view

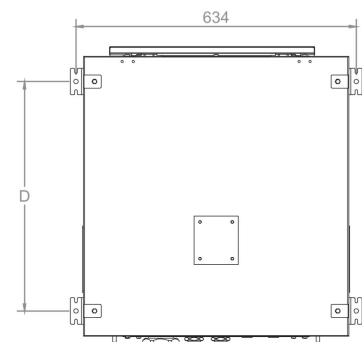


Rear view

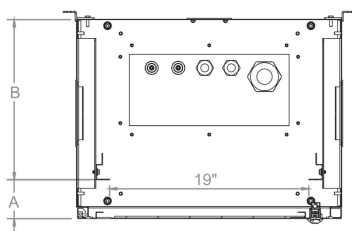

Top inside view

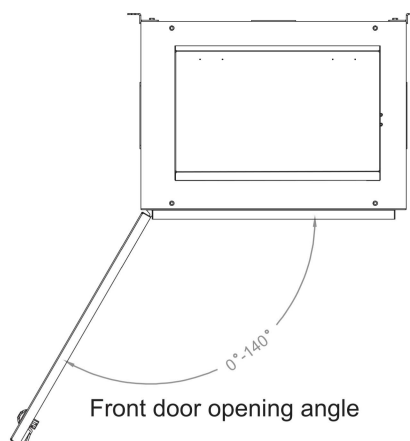

Front door opening angle

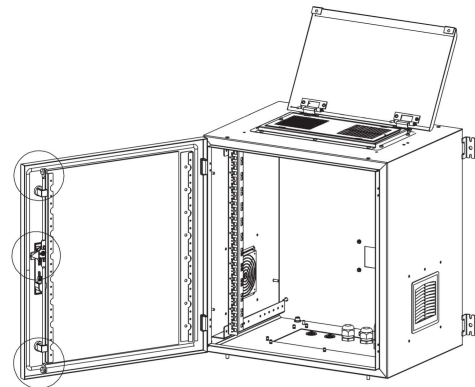


3 point locking system

	A		B	
	Min	Max	Min	Max
D=450	60 mm	185 mm	260 mm	385 mm
D=600	60 mm	335 mm	260 mm	535 mm

D	
7U	298 mm
9U	387 mm
12U	520 mm
16U	698 mm
20U	876 mm

Dimensioned drawing: Network Enclosure Wall, IP55 Indoor, W600 H1018 D600, 19" 20U

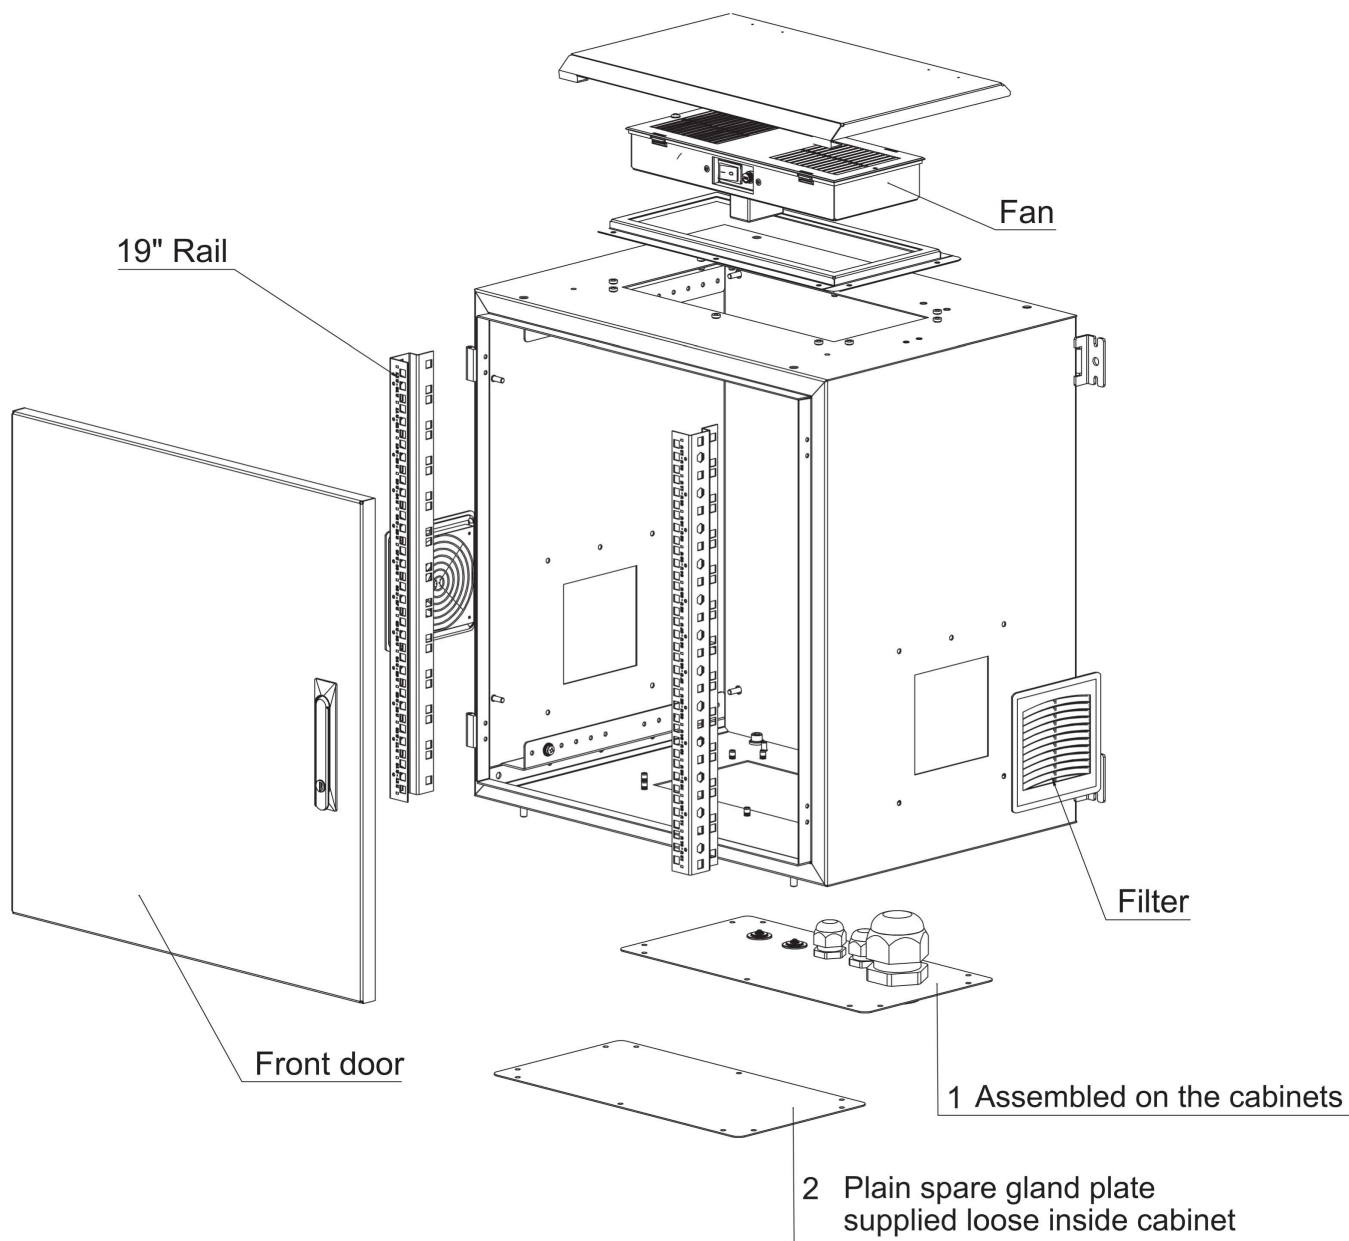

DESCRIPTION	Order No.
Network Enclosure Wall, IP55 Indoor, W600 H1018 D600, 19" 20U grey, RAL7035, Glassdoor	DTWI206060

Optional Accessories

Article Table

DESCRIPTION	Order No.
Optional Accessories	
Roof Fan-unit IP54, 1 fan, switch (on/off), RAL7035 for DTWI wallmount enclosures IP55, Lightgrey, Installation from outside of enclosure	DTLTR5521
Roof Fan-unit IP54, 2 fan, switch (on/off), RAL7035 for DTWI wallmount enclosures IP55, Lightgrey, Installation from outside of enclosure	DTLTR5522
19" Profile rail set, 16U f. S-RACK wallmount enclosure DTWI 1 PU = 2 Pieces	DTWIPROF16
Swing handle conversion kit for half cylinder for S-RACK freestanding enclosure DT and wallmounting enclosure DTWI. For DTWI additionally necessary is DTZLOCK05	DTZLOCK02
Swing handle adapter kit for half cylinder for DTWI (additional DTZLOCK02- necessary)	DTZLOCK05
Switch 24xRJ45 10/100/1000, Silent, w/o fan, internal PSU Metal-Chassis, 19"	QLGSW2457
19" PDU, 9xSchuko, Profile ALU 1U, 2m-cable, RAL7035	IU070114
19" PDU, 7xSchuko with overvoltage protection, PVC, 1.25U 2m-connector cable, RAL7035	IU070113
19" PDU, 9x Schuko, switch, 1U, 2m-cable, Black, ALU ALU Profil	Q7070114-A
19" PDU, 7x Schuko, Switch, Overvoltage protection, 1U 2m-cable, Black, ALU	Q7070113-A