



Data Sheet for Article: DW066050--

Network Enclosure Wall DW Monobloc, W600xH370xD495, 19", 6U



SCHRACK-Info

APPLICATION

19"- Networking enclosure for wallmounting. Mostly used in offices and similar environments like private flats or houses. Used as central enclosures in small to medium sized network cabling systems or as sub enclosures in medium to big sized network cabling systems. The removable sidepanels allow comfortable and easy access to the installed devices for maintenance, repair, etc. For active cooling, it is possible to install optional fans into the roof and/or floor.

TECHNICAL DATA

- Welded, powder-coated sheet steel chassis
- Available dimensions:
 - 6, 9, 12, 15 and 18U at depth of 495mm
 - 9, 12, 15 and 18U at a depth of 595mm
- Width: 600mm
- Color: RAL7035 /lightgrey)
- Degree of protection: IP20
- Front-full-glasdoor made from safety glass 5mm including lock and 2 keys.
 - Door hinged right, easy and quick change to left hinging possible
 - Door opening: ca. 180°
 - Fullmetall- and perforated doors available as an option
- Removable sidepanels with lock and keys.
- 19"-rails 2 pairs in front and behind, galvanized, continuously depth-adjustable. Numbering of Height-Units (U) by laser for easy readability.
- Roof and floor with 3 openings each for optional fan DLT12121. Covered with „break-out-style“ blanking covers, which can be easily broken out by use of a simple tool like a screwdriver.
- Cable-entry-openings in roof (1x), floor (1x) and rearpanel (2x). Covered with „break-out-style“ blanking covers, which can be easily broken out by use of a simple tool like a screwdriver.
- Cable-entry-panel with brush included (1x).
- Cooling:
 - Passive cooling by ventilation slots and by sharing heat with environment via chassis.
 - Active cooling by optional fan(s) DLT12121. Max. 6 pieces per enclosures (3 pieces each can be installed in roof and floor).
- Earthing:
 - M8- Earthing point in the rear of the cabinet.
 - FastOn-Earthing-connections to all dismountable parts pre-installed.
- Included assembly materials:
 - 8 x cage nuts, screws and washers M6.
 - 4x dowel 10x50 and 4x screws M6x50 for fixing the wall.
- Wide range of available accessories (patchpanels, fixed shelves, PDUs, cable management, doors, etc.).
- Enclosure is delivered fully-assembled.
- Space between front vertical 19"-rail and door glass at max. spacing: W600 – 50mm

- Units of measurement:
 Unit (Height Unit): 1 U = 44,45mm
 Inch: 1" = 25,4mm
 Unit (Height Unit): 1 U = 1,75"


Technical Data

Net width (mm)	600,00
Net height (mm)	370,00
Netto depth (mm)	495,00
Net weight (kg)	17,00
Min. ambient temperature (°C)	0
Max. ambient temperature (°C)	40
Suitable for HU	6U-370mm
Product	Data-Enclosures Wallmounting Monobloc with removeable sidepanels IP20
Colour	RAL 7035 (Light grey)
Roof fan unit option	yes
Basic Description	Enclosure


Datei Tabelle: Network Enclosure Wall DW Monobloc, W600xH370xD495, 19", 6U

Typ	A	B	C	D	E	R1	R2	Gross Weight (kg)	Net Weight (kg)	Recommend d Maximum load (kg)
	(mm)									
DW066050--	370	265	530	600	495	324	420	16,4	16,1	45
DW096050--	500	395	530	600	495	454	420	19,8	19,5	45 (when using a reinforcing element: 90kg)
DW126050--	635	530	530	600	495	589	420	22	21,7	
DW156050--	770	665	530	600	495	724	420	26,3	26	
DW186050--	900	795	530	600	495	854	420	29,5	29,1	

**Dimensioned drawing: Network Enclosure Wall DW Monobloc,
W600xH370xD495, 19", 6U**

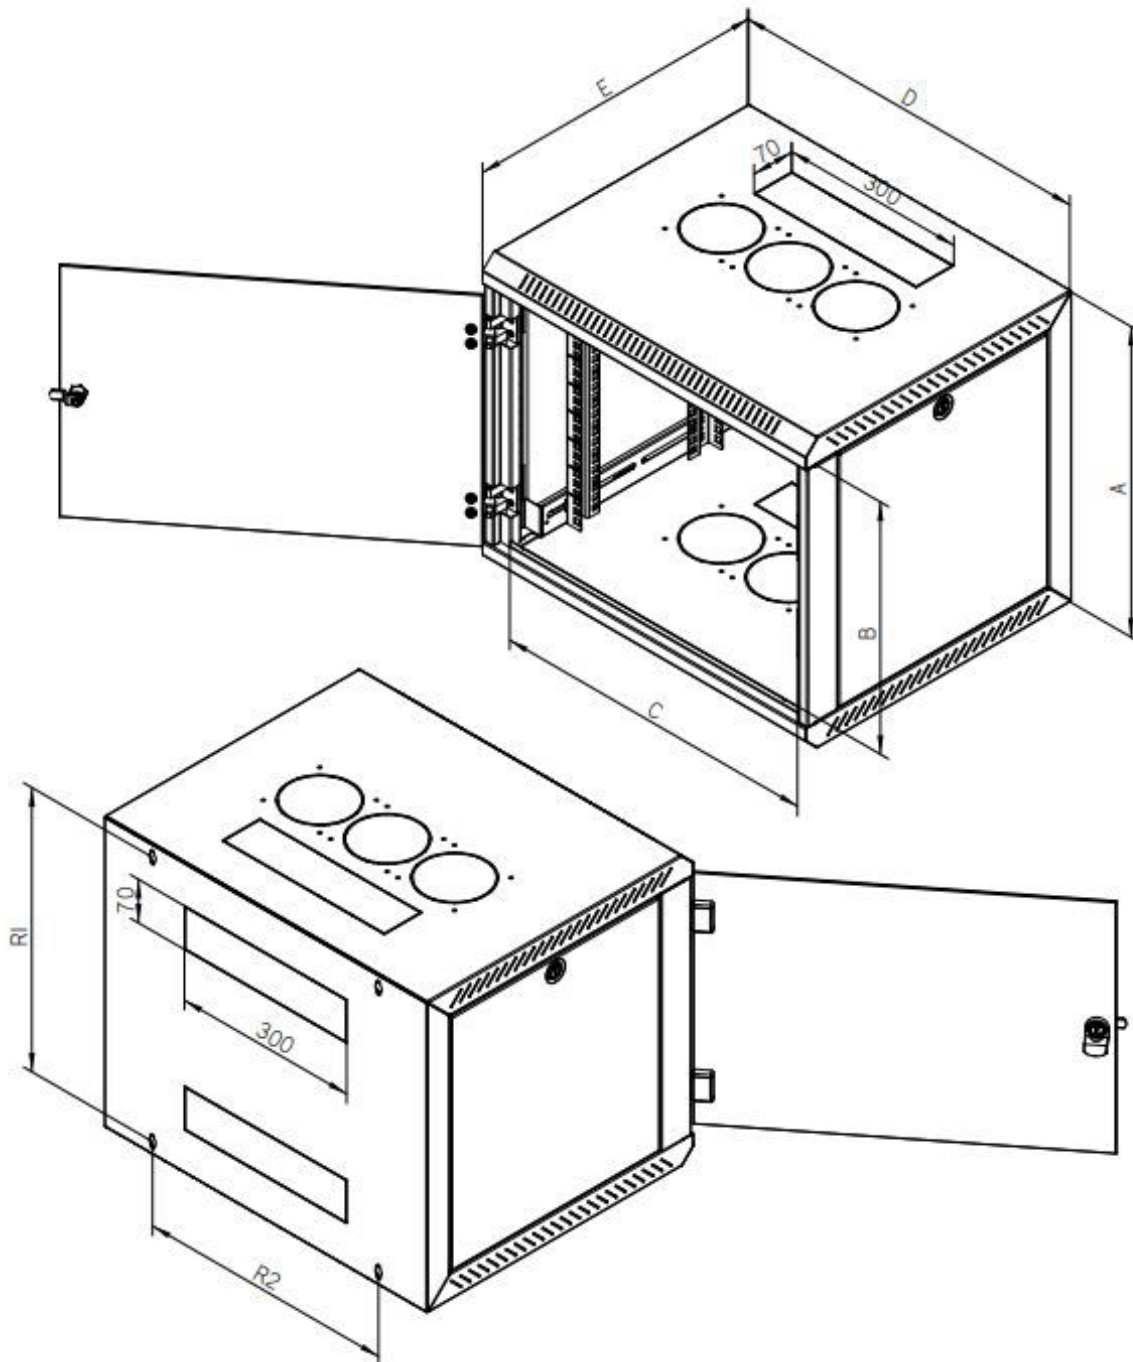

Schnittansicht der vertikalen 19"-Profilschienen

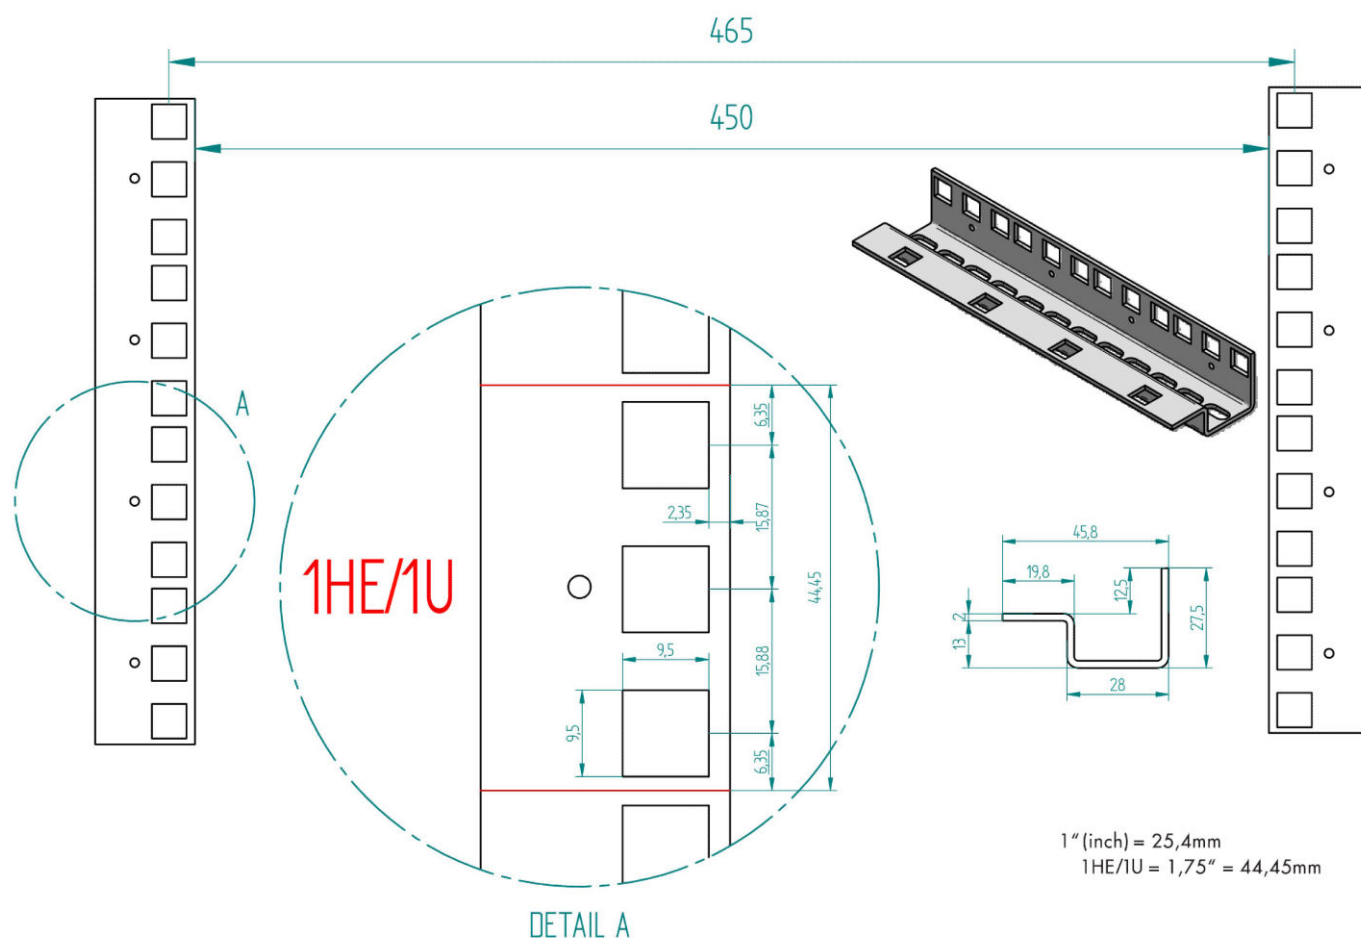

Article Table

DESCRIPTION	Order No.
Network Enclosure Wall DW Monobloc, W600xH370xD495, 19", 6U	DW066050
Optional Accessories	
Fan(1x), Cable w. On/Off-Switch,Filter+Grille f. DWxx6050/60	DLT12121
19" Shelf Fix, up to 50kg Load, D=350mm, 1U, RAL7035	DFS14835-C
19" Mounting set M6, 50 pcs. each: screw, nut, washer	DSSRA050
Light unit LED, magnet, 230VAC, with door switch sensor automatically in operation as soon as the door is opened, external PSU	DTLIGHT01
19" PDU, 9xSchuko, Profile ALU 1U, 2m-cable, RAL7035	IU070114
19" PDU, 7xSchuko with overvoltage protection, PVC, 1.25U 2m-connector cable, RAL7035	IU070113

Article Table

DESCRIPTION	Order No.
Optional Accessories	
19" PDU, 9x Schuko, switch, 1U, 2m-cable, Black, ALU ALU Profil	Q7070114-A
19" PDU, 7x Schuko, Switch, Overvoltage protection, 1U 2m-cable, Black, ALU	Q7070113-A
Door full metal for DW-enclosure 6U, W=600	DWRT0660
Door metal perforated 80% for DW-enclosure 6U,W=600	DWRT0661
Full Glas Door for DW-enclosure 6U, W=600	DWRT0663
Door full metal f.DW-encl 6U,W600,RAL7035,Halfcylinder ready Vorbereitung	DWRT0666
Glas Door f.DW-enclosure 6U,W600,RAL7035,Halfcylinder ready Vorbereitung	DWRT0667
Switch 24xRJ45 10/100/1000, Silent, w/o fan, internal PSU Metal-Chassis, 19"	QLGSW2457
Patchpanel 19" empty for 24 modules (SFA)(SFB), 1U, RAL7035 Light grey, patchcord lock down	HSER0240GS