

Data Sheet for Article: DW126040--

Network Enclosure Wall DW Monobloc, W600xH635xD395, 19", 12U

**SCHRACK-Info**

TECHNICAL DATA

- Steel sheet
- Available heights: 4, 6, 9, 12, 15 and 18U
- Width: 600mm, Depth: 395mm
- Colour: lightgrey RAL 7035
- Degree of protection: IP20
- Front-full-glassdoor made from safety glass 5mm including lock and 2 keys
Door hinged right, easy and quick change to left hinging possible
Door opening: ca 180°
Fullmetall- and perforated doors available as an option
- 19" rails (2 pcs.) galvanised, continuously depthadjustable. Numbering of Height-Units (U) by laser for easy readability.
- Cable-entry-openings in roof (1x), floor (1x) and rearpanel (2x). Covered with „break-out-style“ blanking covers, which can be easily broken out by use of a simple tool like a screwdriver.
- Cable-entry-panel with brush included (1x).
- Passive cooling by ventilation slots
- M8- Earthing point in the rear of the cabinet.
- FastOn-Earthing-connections to all dismountable parts pre-installed.
- Including assembly materials:
8 x Cage nuts, bolts and washers M6.
4x dowel 10x50 and 4x screws M6x50 for fixing the wall.
- Wide range of available accessories (patchpanels, fixed shelves, PDUs, cable management, doors, etc.).
- Enclosure is delivered fully-assembled.
- space between front vertical 19"-rail and door glass at max. spacing: W600 – 25mm
- Units of measurement:
Unit (Height Unit): 1U= 44,45mm, Inch: 1"= 25,4mm, Unit (Height Unit): 1U= 1,75"

Technical Data

Net width (mm)	600,00
Net height (mm)	635,00
Netto depth (mm)	395,00
Net weight (kg)	19,60
Min. ambient temperature (°C)	0
Max. ambient temperature (°C)	40
Suitable for HU	12U-635mm


Technical Data - continued

Product	Data-Enclosures Wallmounting Monobloc IP20
Colour	RAL 7035 (Light grey)
Roof fan unit option	no
Basic Description	Enclosure


Datei Tabelle: Network Enclosure Wall DW Monobloc, W600xH635xD395, 19", 12U

Typ	A	B	C	D	E	R1	R2	Gross Weight (kg)	Net Weight (kg)	Recommended Maximum load (kg)
	(mm)									
DW046040--	280	175	516	600	395	234	420	12,0	11,7	60
DW066040--	370	265	516	600	395	324	420	13,9	13,6	60
DW096040--	500	395	516	600	395	454	420	16,5	16,1	80
DW126040--	635	530	516	600	395	589	420	19,5	19,1	80
DW156040--	770	665	516	600	395	724	420	22,2	21,8	100
DW186040--	900	795	516	600	395	854	420	25,1	24,7	100

**Dimensioned drawing: Network Enclosure Wall DW Monobloc,
W600xH635xD395, 19", 12U**

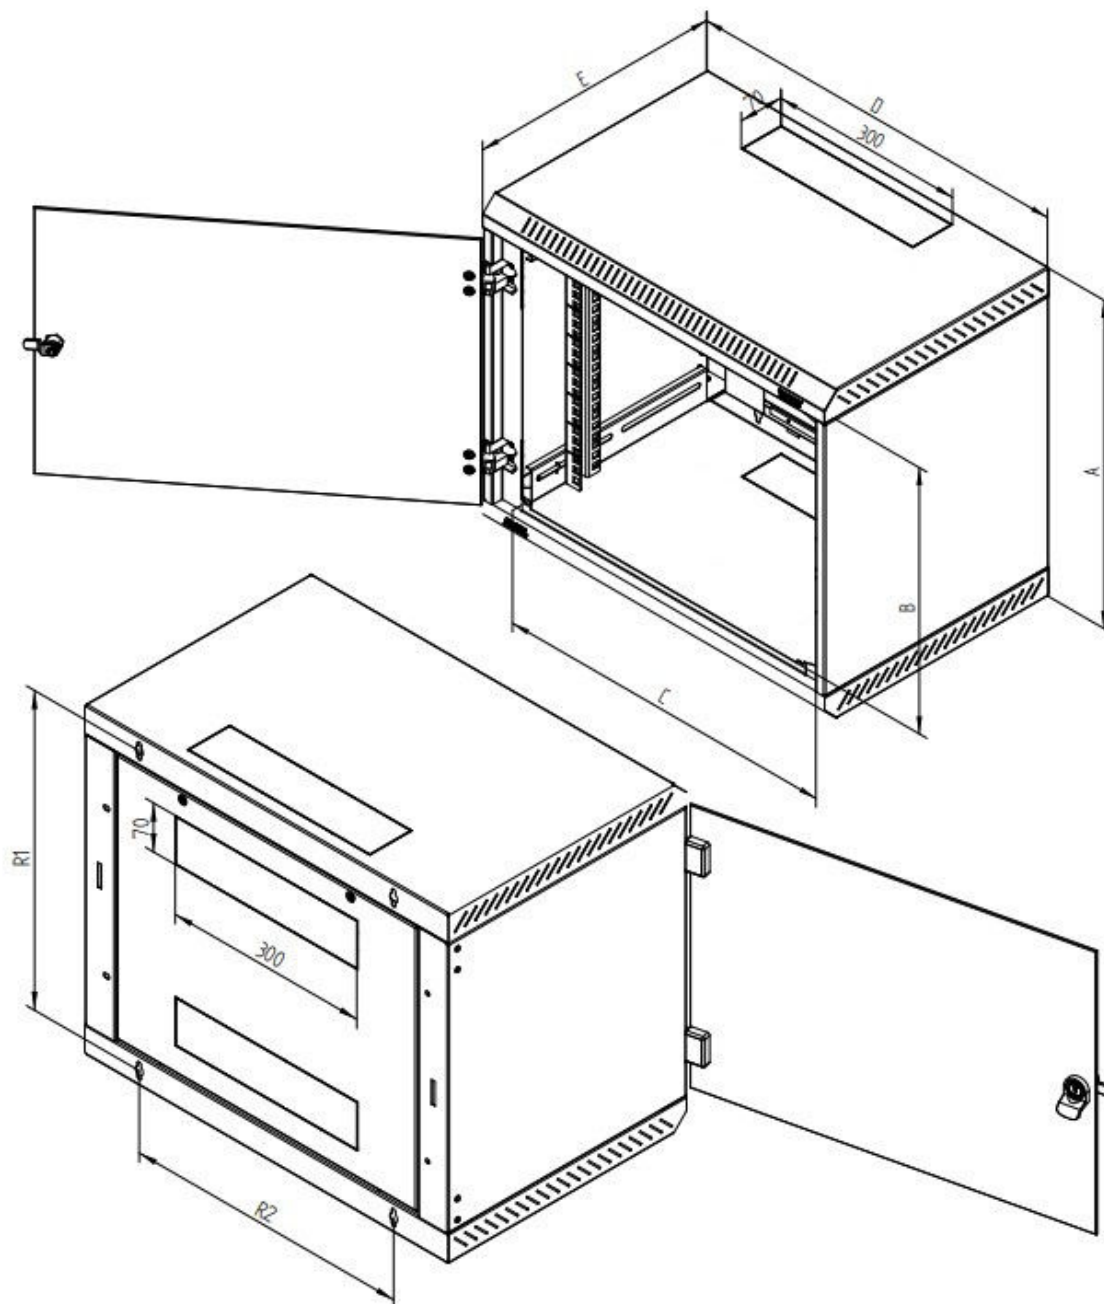

Schnittansicht der vertikalen 19"-Profilschienen

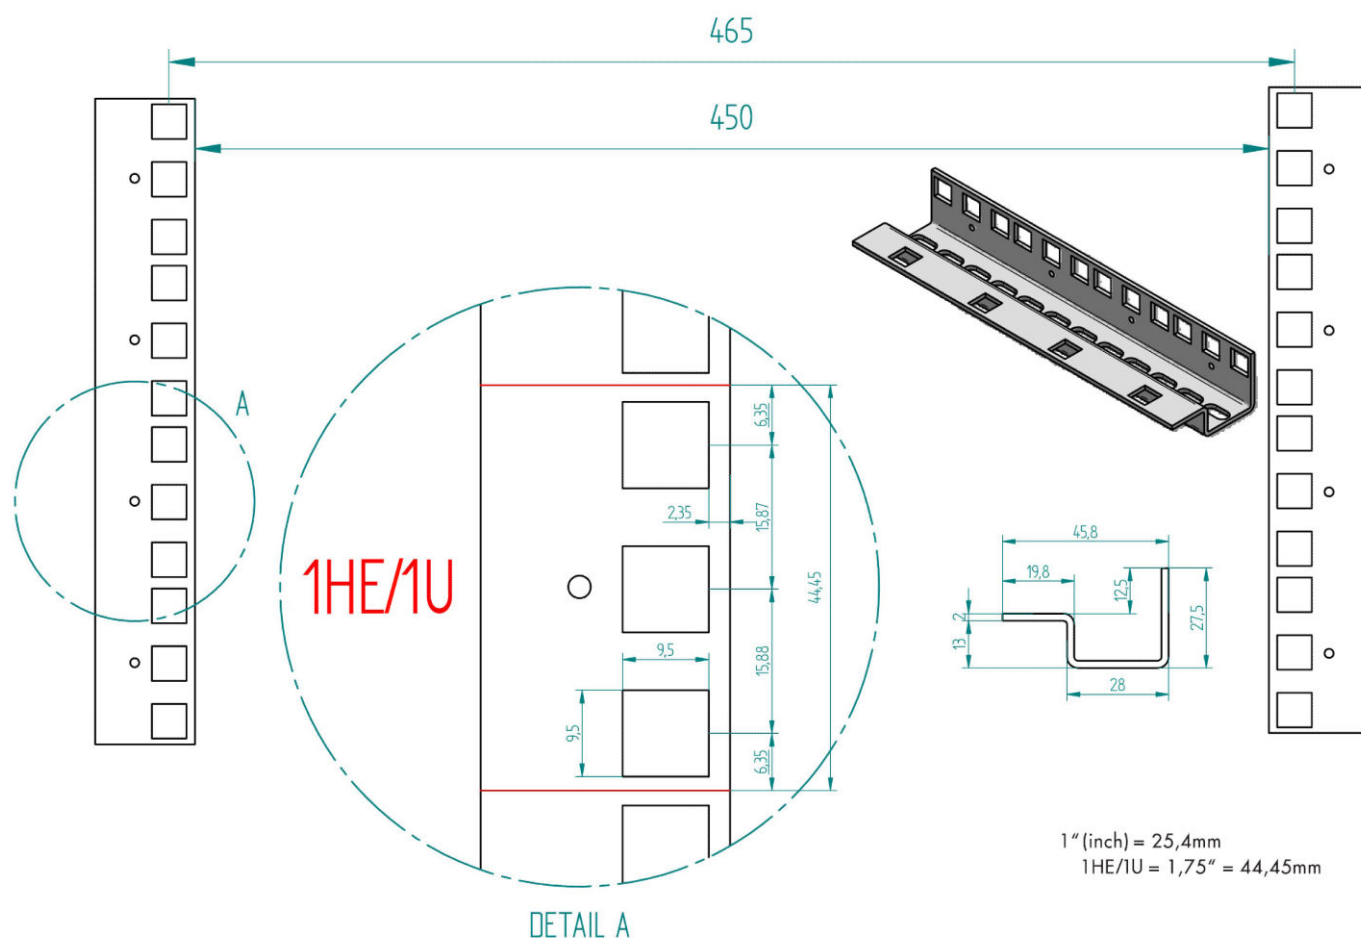

Article Table

DESCRIPTION	Order No.
Network Enclosure Wall DW Monobloc, W600xH635xD395, 19", 12U	DW126040
Optional Accessories	
19" Shelf Fix, up to 15kg Load, D=250mm, 1U, RAL7035	DFS14825-C
19" Mounting set M6, 50 pcs. each: screw, nut, washer	DSSRA050
Light unit LED, magnet, 230VAC, with door switch sensor automatically in operation as soon as the door is opened, external PSU	DTLIGHT01
19" PDU, 9xSchuko, Profile ALU 1U, 2m-cable, RAL7035	IU070114
19" PDU, 7xSchuko with overvoltage protection, PVC, 1.25U 2m-connector cable, RAL7035	IU070113
19" PDU, 9x Schuko, switch, 1U, 2m-cable, Black, ALU ALU Profil	Q7070114-A

Article Table

DESCRIPTION	Order No.
Optional Accessories	
19" PDU, 7x Schuko, Switch, Overvoltage protection, 1U 2m-cable, Black, ALU	Q7070113-A
19" Profile rail 12U for DW-enclosures	DWPROF12
Door full metal for DW-enclosure 12U, W=600	DWRT1260
Door metal perforated 80% for DW-enclosure 12U, W=600	DWRT1261
Full Glas Door for DW-enclosure 12U, W=600	DWRT1263
Door full metal f.DW-encl 12U, W600, RAL7035, Halfcylinder ready Vorbereitung	DWRT1266
Glas Door f.DW-enclosure 12U, W600, RAL7035, Halfcylinder ready Vorbereitung	DWRT1267
19" Shelf holder f. back of DW-enclosure with fixed sidepanel	DFSZDW01
Switch 24xRJ45 10/100/1000, Silent, w/o fan, internal PSU Metal-Chassis, 19"	QLGSW2457
Patchpanel 19" empty for 24 modules (SFA)(SFB), 1U, RAL7035 Light grey, patchcord lock down	HSER0240GS