

Data Sheet for Article: EV210021--

Push button illuminated, cage clamps, VISIO IP54

Surface mounted, Rated current 10A, Connection type Plug-in terminal



Schrack-Info

Robust surface-mounted pushbutton made of durable and weather-resistant, glass-fibre-reinforced thermoplastic with an orientation light that illuminates permanently. The switch is IP54 splash-proof and also provides additional protection against dust. Furthermore, it is resistant to chemicals and elevated temperatures and at the same time has a high impact strength (IK05). Inside the switch there is already a connected quick connection terminal for the earthing connection, which allows an even easier connection. Up to three cables can be routed through the sealing diaphragm both above and below the switch.




Technical Data

Net length (mm)	83,00
Net width (mm)	74,00
Net height (mm)	56,00
Net weight (kg)	0,11
Series	05-VISIO IP54
Product typ	Switch
Operating voltage AC (V)	230
Switching current (AX)	10

Technical Data - continued

mounting	Wall-mounted
Mounting method	Screwed
IP Rating	IP54
Colour	Grey
Connection type	Plug-in terminal
Allowed cables	Stiff
Allowed cross-section (mm²)	1,5 und 2,5
Material	ABS Copper
Environment	Halogen free
Sustainability	ROHS
test mark	VDE
Dimensions (mm)	83x74x56

Abmessungen (mm)

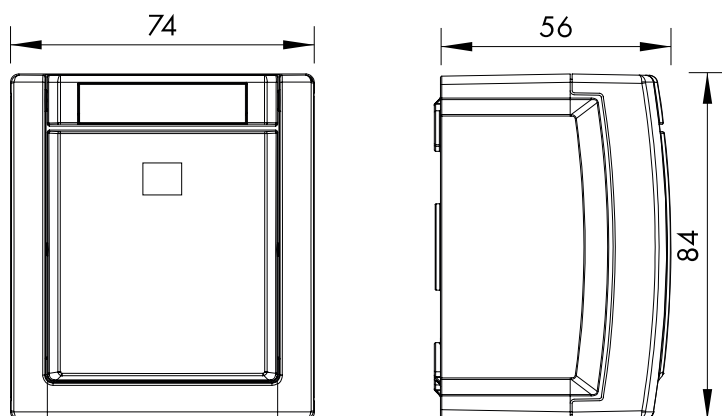

Article Table

DESCRIPTION	Order No.
Push button illuminated, cage clamps, VISIO IP54	EV210021
Surface mounted, Rated current 10A, Connection type Plug-in terminal	
Optional Accessories	
Adaptor for vertical add-on, switches, sockets, VISIO IP54	EV217002
Surface mounted, cage clamps, , ABS, ROHS,	