

Horizontal combination two-gang pin socket outlet, VISIO IP54

Surface mounted, safety shutter, Rated current 16A, Connection type Plug-in terminal, Grey



Schrack-Info

Robust surface-mounted protective contact socket outlet with increased protection against accidental contact made of durable and weather-resistant, glass-fibre reinforced thermoplastic. The socket is IP54 splash-proof and offers additional protection against dust. Furthermore, it is resistant to chemicals and elevated temperatures and at the same time has a high impact strength (IK05). Up to three cables can be routed through the sealing diaphragm both above and below the switch.




Technical Data

Net length (mm)	84,00
Net width (mm)	148,00
Net height (mm)	60,00
Net weight (kg)	0,21
Series	05-VISIO IP54
Product typ	Shockproof socket
mounting	Wall-mounted
Mounting method	Screwed

Technical Data - continued

Colour	Grey
Connection type	Plug-in terminal
Allowed cables	Stiff
Allowed cross-section (mm ²)	1,5 und 2,5
Material	ABS
Environment	Halogen free
Sustainability	ROHS
test mark	VDE
Dimensions (mm)	168x74x56

Abmessungen (mm)

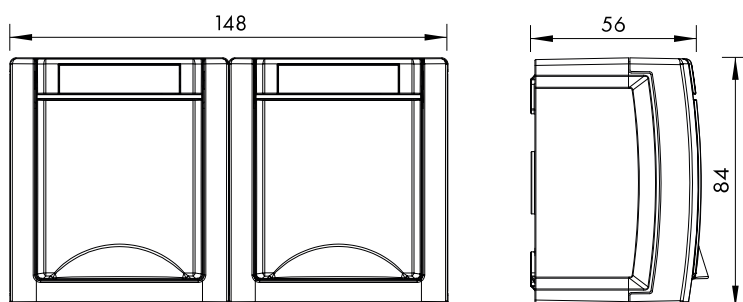

Article Table

DESCRIPTION	Order No.
Horizontal combination two-gang pin socket outlet,VISIO IP54	EV211021
Surface mounted, safety shutter, Rated current 16A, Connection type Plug-in terminal, Grey	
Optional Accessories	
Adaptor for vertical add-on, switches, sockets, VISIO IP54	EV217002
Surface mounted, cage clamps, , ABS, ROHS,	