


Data Sheet for Article: HDCR100249

IS-1 cable manager vertical 41 U RAL7035 lightgrey

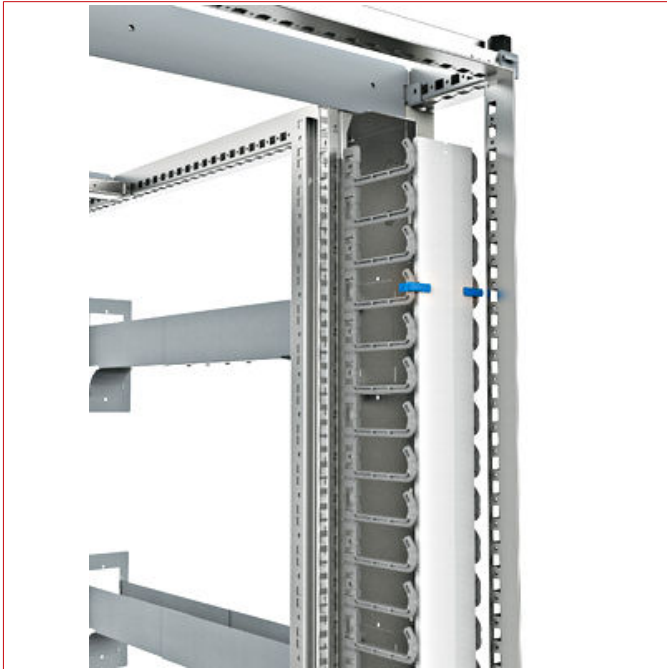

SCHRACK-Info

IS-1 cable manager, vert. 41 U R7035 packed

Cabinet height: 2,000 mm

Dimensions of extension bracket: 90 x 112 mm (W x D)

Inside depth of the cable finger: 78 mm

Material/finish Channel: Sheet steel, powder-coated

Material of finger/clips: PC+ABS FR40

Fire behaviour: halogen-free; UL 94 V-0

Channel colour: RAL 7035 Light grey

Finger colour: RAL 9005 Jet black

Vertical cable manager for structured cable routing

in IS-1 cabinets. Large channel for storing excess lengths. Rounded 1 U cable finger for safe guidance of fibre optic cables. Four cable entries each at the side and rear (knockout). Detachable, divided cap for closing the manager.

Note: Only for racks B700 (asymmetrical) and B800.

Comprising:

1 Vertical cable manager

17 Cable finger, 5x

2 Cap

Fitting material

Delivery condition: packed

Technical Data

Net width (mm)	90,00
Net height (mm)	2.200,00
Netto depth (mm)	112,00
Net weight (kg)	9,50
Min. ambient temperature (°C)	-10
Max. ambient temperature (°C)	60

DESCRIPTION	Order No.
IS-1 cable manager vertical 41 U RAL7035 lightgrey	HDCR100249