


Data Sheet for Article: HLP03T002V

FO Pigtail ST, 50/ 125µm OM3, 2.0m, 12 pcs, PREMIUM Class B

colored

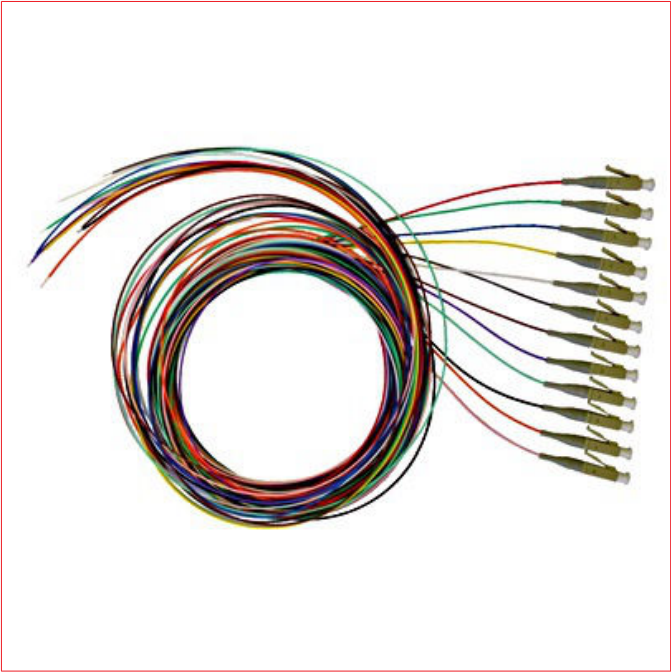

OM3

Technical Data

Net width (mm)	120,00
Net height (mm)	15,00
Net weight (kg)	0,12
Product	Pigtails
Options	Set of 12
Max. strip length (mm)	1000
Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	70
Insertion loss typical (dB)	0,12
Return loss typical (dB)	≥ 35
Fiber (µm)	50/125 OM3 Multimode
Primary coating (µm)	250
Secondary coating (µm)	900

Technical Data - continued

Conductor color (Set of 12) / IEC 60304	red, green, yellow, white, grey, brown, violet, turquoise, black, orange, pink
Fiber standard	IEC 60793-2-10
Connector type	ST
Plug color	metal
Ferrule diameter (mm)	2,5
Plugging cycles	500
Connector standard	IEC 61754-2
Tensile strength (N)	5
Standard	IEC 61753-1

Article Table

DESCRIPTION	Order No.
FO Pigtail ST, 50/125µm OM3, 2.0m, 12 pcs, PREMIUM Class B colored	HLP03T002V