

Data Sheet for Article: HLP19MD03F

# FTTH Patchcord Simplex LC/APC - SC/APC, 9/125µm OS2, 3.0m


LS0H, white



## Technical Data

|                               |                               |
|-------------------------------|-------------------------------|
| Net width (mm)                | 200,00                        |
| Net height (mm)               | 300,00                        |
| Net weight (kg)               | 0,03                          |
| Product standard              | IEC 61300-3-4 / IEC 61300-3-6 |
| Connector standard            | IEC 61754                     |
| Combination of connectors     | LC APC/SC APC                 |
| Patchcordlength (m)           | 3,0                           |
| Fiber                         | 9/125 OS2 Singlemode          |
| Cable jacket                  | LS0H                          |
| Colour                        | White                         |
| Diameter (mm)                 | 2                             |
| Insertion loss typical (dB)   | ≤0,25                         |
| Return loss typical (dB)      | ≥60                           |
| Wavelength (nm)               | 1310                          |
| Min. ambient temperature (°C) | -20                           |
| Max. ambient temperature (°C) | 60                            |

**Dimensioned drawing: FTTH Patchcord Simplex LC/APC - SC/APC, 9/125µm OS2, 3.0m**

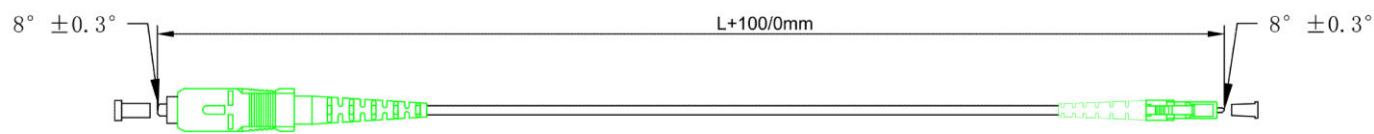

| DESCRIPTION                                                              | Order No.  |
|--------------------------------------------------------------------------|------------|
| FTTH Patchcord Simplex LC/APC - SC/APC, 9/125µm OS2, 3.0m<br>LSOH, white | HLP19MD03F |