

Data Sheet for Article: HSATG882M-

SAT Enclosure Steel, Perf-Mountingplate, 3Point, W800xH800xD200

RAL7035



SCHRACK-Info

Mounting plate: with 3 mm diameter openings in a 5 x 5 mm grid.

Technical Data

Net width (mm)	800,00
Net height (mm)	800,00
Netto depth (mm)	200,00


Technical Data - continued

Net weight (kg)	18,20
Min. ambient temperature (°C)	0
Max. ambient temperature (°C)	40


Datei Tabelle: SAT Enclosure Steel, Perf-Mountingplate, 3Point, W800xH800xD200

	Measurement			Weight net [kg]	Weight brutto [kg]
	A [mm]	B [mm]	C [mm]		
HSATG662M-	600	600	200	17	17.2
HSATG862M-	600	800	200	14.7	15
HSATG882M-	800	800	200	18.2	18.5
HSATG432M-	300	400	200	8.9	9.1
HSATG442M-	400	400	200	10	10.2

Dimensioned drawing: SAT Enclosure Steel, Perf-Mountingplate, 3Point, W800xH800xD200

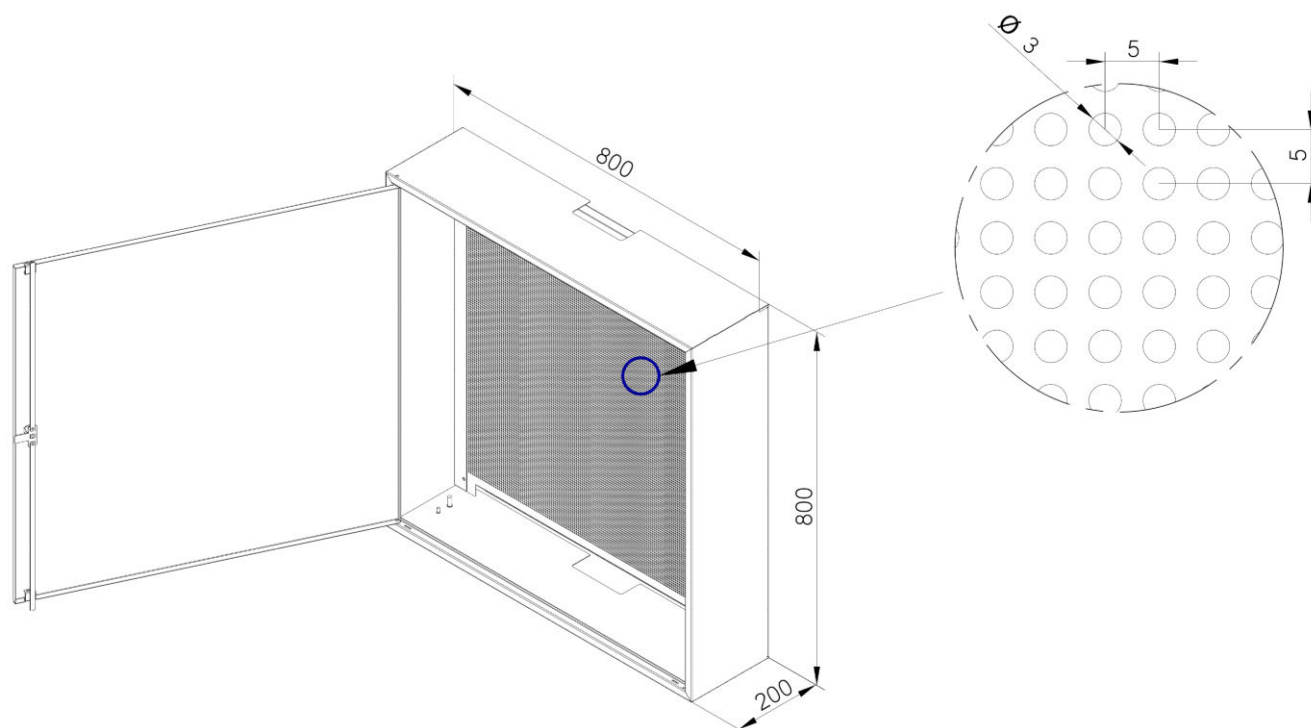

Dimensioned drawing: SAT Enclosure Steel, Perf-Mountingplate, 3Point, W800xH800xD200

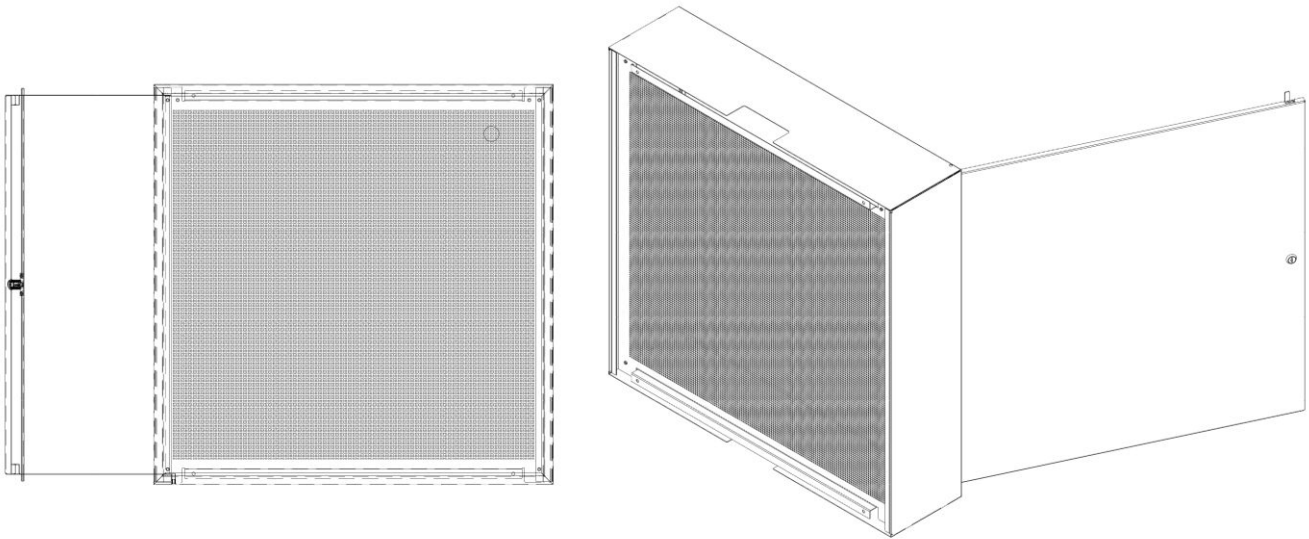

Article Table

DESCRIPTION	Order No.
SAT Enclosure Steel, Perf-Mountingplate, 3Point, W800xH800xD200 RAL7035	HSATG882M
Optional Accessories	
Brush insert for wallmount enclosure DW/HSATG, 300x70mm, black	HDZA0003
SAT Multiswitch 5 IN 8 OUT, cascadeable, SPU 58-09N	HSATS508KN
SAT Multiswitch 5 IN 16 OUT, cascadeable, SPU 516-09N	HSATS516KN
SAT Earthing angle with surge protection, 5xF, QEW 5-10N	HSZUEU05AN
SAT Multiswitch 9 IN 12 OUT, cascadeable, SPU 912-09S	HSATS912KS
SAT Earthing angle with surge protection, 9xF, QEW 9-10	HSZUEU09A
SAT Earthing angle with surge protection, 9xF, QEW 9-10S	HSZUEU09S