


Data Sheet for Article: HSELS043CR

FO Splicebox for DIN Rail, 4 Fibers, SC, 50/125µm OM3

RAL7035, incl. Pigtails, incl. couplers, CLASSIC





OM3 DIN rail

Technical Data

Net width (mm)	126,00
Net height (mm)	35,20
Netto depth (mm)	155,65
Net weight (kg)	0,59
Fiber	50/125 OM3 Multimode
Colour	RAL 7035 (Light grey)
Insertion loss typical (dB)	≤0,2
Return loss typical (dB)	≥35
Min. ambient temperature (°C)	-10
Max. ambient temperature (°C)	70
Fibre count	4
Coupler/Connector	SC

Dimensioned drawing: FO Splicebox for DIN Rail, 4 Fibers, SC, 50/125µm OM3

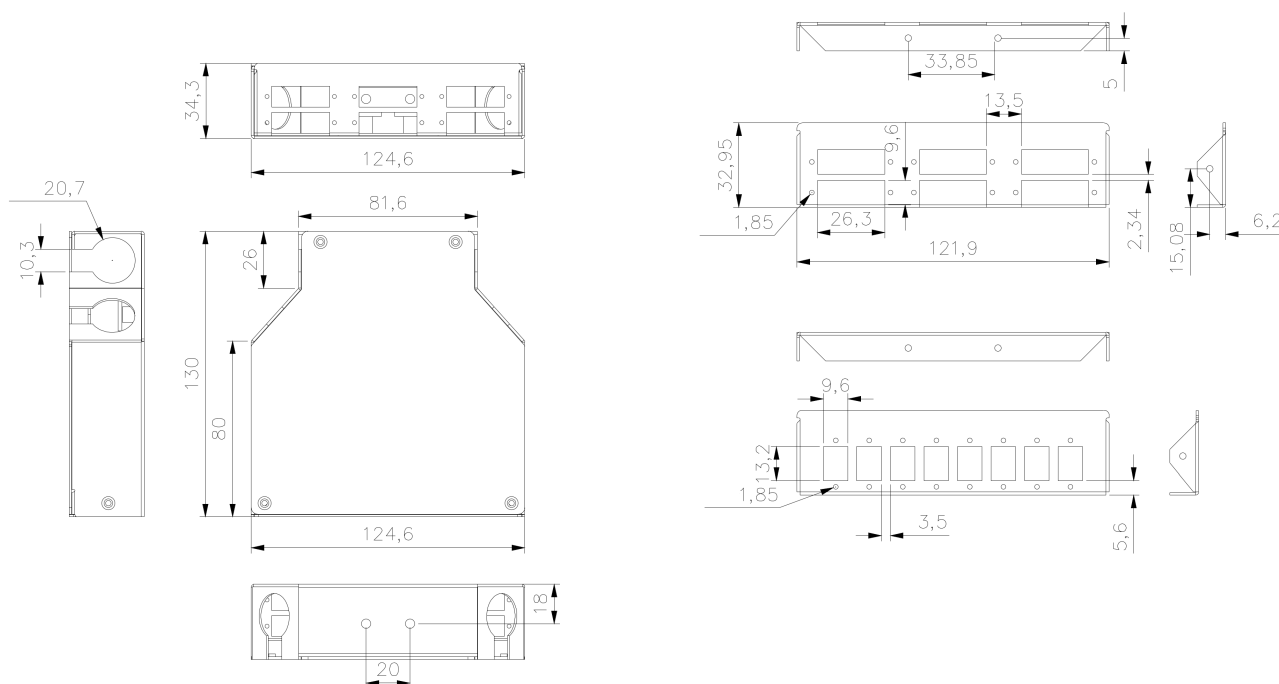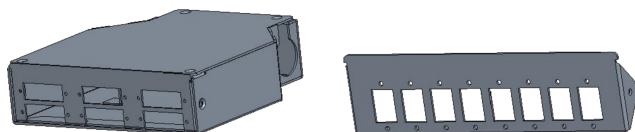

Article Table

DESCRIPTION	Order No.
FO Splicebox for DIN Rail, 4 Fibers, SC, 50/125µm OM3	HSELS043CR
RAL7035, incl. Pigtailes, incl. couplers, CLASSIC	
Optional Accessories	
FO shrink splice protector 60mm	HELSP00011
FO shrink splice protector 45mm	HELSP00010
Fiber Optics Cleaning Tool for SC, ST, FC and E2000	HSELSZT002
Suitable for UPC and APC connectors. More than 1,000 cleaning cycles.	
FO Power meter with integrated laser light source (VFL) and	
RJ45-copper cable test. ATTENTION: This is a Laser Class 2 product. Do not stare into the beam. Always keep the cover on the VFL	HSELSZT003
port when not in use. It is recommended to use laser safety glasses when working with fiber optic systems.	

Article Table

DESCRIPTION	Order No.
Optional Accessories	
FO Patchcord Duplex SC/UPC - SC/UPC, 50/125µm OM3, 2.0m LSOH, aqua	HLP23CC02F
FO Patchcord Duplex SC/UPC - SC/UPC, 50/125µm OM3, 5.0m LSOH, aqua	HLP23CC05F
FO Patchcord Duplex LC/UPC - SC/UPC, 50/125µm OM3, 2.0m LSOH, aqua	HLP23LC02F
FO Patchcord Duplex LC/UPC - SC/UPC, 50/125µm OM3, 5.0m LSOH, aqua	HLP23LC05F
FO Patchcord Duplex ST/UPC - SC/UPC, 50/125µm OM3, 2.0m LSOH, aqua	HLP23TC02F
FO Patchcord Duplex ST/UPC - SC/UPC, 50/125µm OM3, 5.0m LSOH, aqua	HLP23TC05F