


Data Sheet for Article: HSELS124LR

FO Splicebox for DIN Rail, 12 Fibers, LC, 50/125µm OM4



RAL7035, incl. Pigtails, incl. couplers, CLASSIC

**OM4** **DIN rail**

Technical Data

Net width (mm)	126,00
Net height (mm)	35,20
Netto depth (mm)	155,65
Net weight (kg)	0,59
Fiber	50/125 OM4 Multimode
Colour	RAL 7035 (Light grey)
Insertion loss typical (dB)	≤0,2
Return loss typical (dB)	≥35
Min. ambient temperature (°C)	-10
Max. ambient temperature (°C)	70
Fibre count	12
Coupler/Connector	LC

Dimensioned drawing: FO Splicebox for DIN Rail, 12 Fibers, LC, 50/125µm OM4

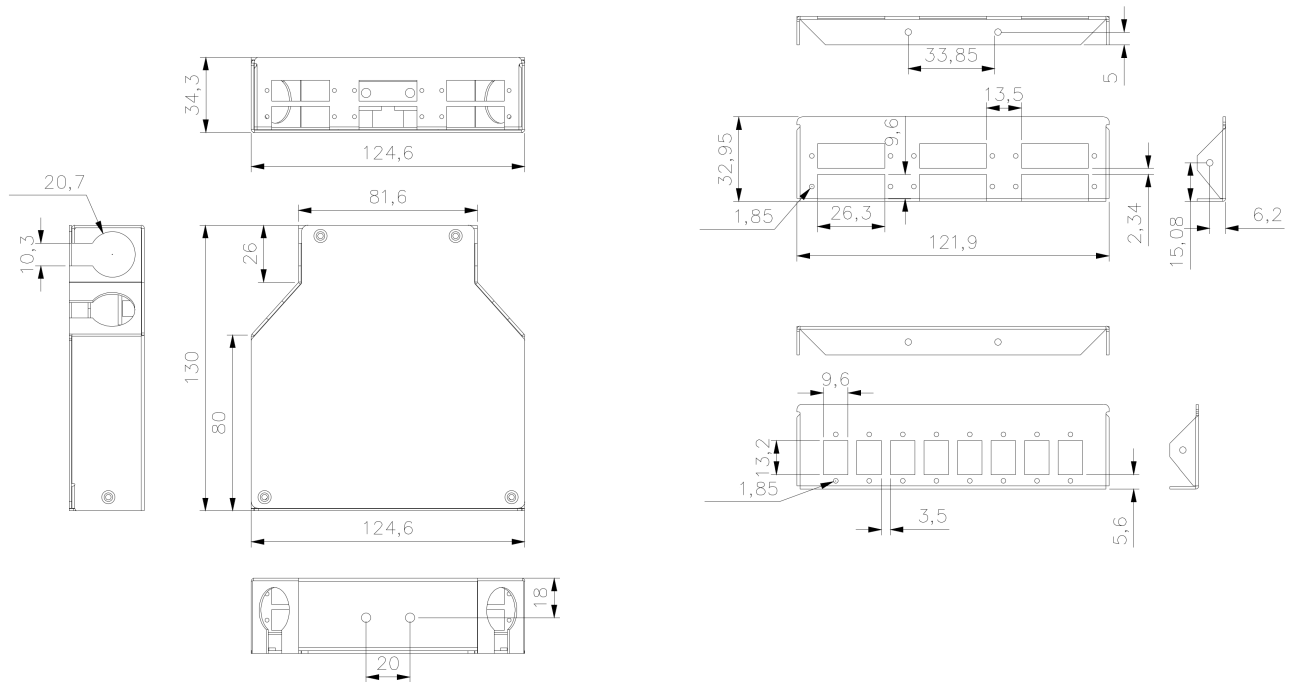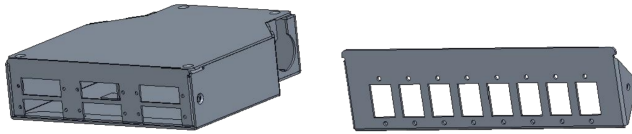

Article Table

DESCRIPTION	Order No.
FO Splicebox for DIN Rail, 12 Fibers, LC, 50/125µm OM4 RAL7035, incl. Pigtails, incl. couplers, CLASSIC	HSELS124LR
Optional Accessories	
FO shrink splice protector 60mm	HELSP00011
FO shrink splice protector 45mm	HELSP00010
Fiber Optics Cleaning Tool for LC and MU Suitable for UPC and APC connectors. More than 1,000 cleaning cycles.	HSELSZT001
FO Power meter with integrated laser light source (VFL) and RJ45-copper cable test. ATTENTION: This is a Laser Class 2 product. Do not stare into the beam. Always keep the cover on the VFL port when not in use. It is recommended to use laser safety glasses when working with fiber optic systems.	HSELSZT003
FO Patchcord Duplex LC/UPC - LC/UPC, 50/125µm OM4, 2.0m LSOH, heather violet	HLP24LL02F
FO Patchcord Duplex LC/UPC - LC/UPC, 50/125µm OM4, 5.0m LSOH, heather violet	HLP24LL05F
FO Patchcord Duplex LC/UPC - SC/UPC, 50/125µm OM4, 2.0m LSOH, heather violet	HLP24LC02F
FO Patchcord Duplex LC/UPC - SC/UPC, 50/125µm OM4, 5.0m LSOH, heather violet	HLP24LC05F