







Data Sheet for Article: HSELS125TG

# FO Splicebox, 12 Fibers, ST, 50/125µm OM2, 19", 1U, Class B

acc. to IEC 61753-1, RAL7035, sliding, pigtails inserted and prepared ready for splicing, PREMIUM

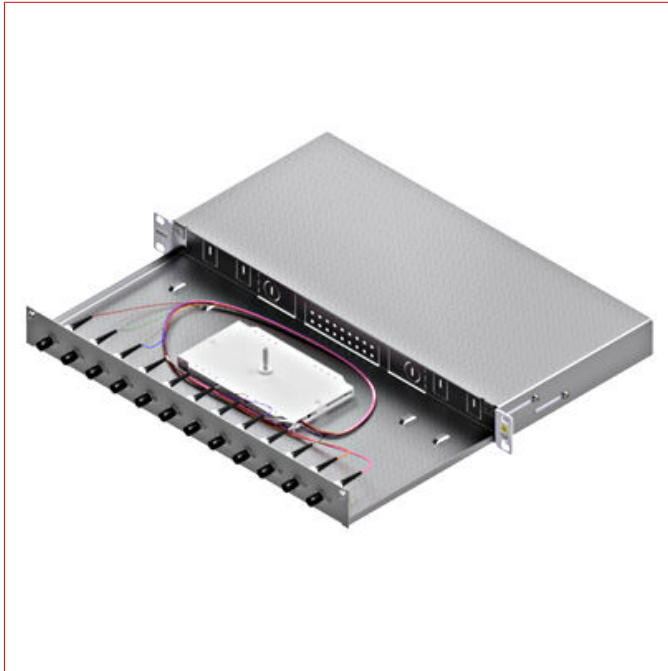

## SCHRACK-Info

FO splice box extendable with quick release fastener and equipped with Grade B pigtails for splicing FO cables. The pull-out depth of 20 cm ensures easy access to the couplings. Furthermore the box can be set back by 40 mm. A possibility for the sloping input of section cables is integrated.

### Properties Housing:

- 19", 1 U installation, extendable
- incl. Depth adjustment
- front panel and side parts powder-coated
- colour: grey, RAL7035
- Lid metallic glossy
- Central screw bolt for fixing up to 4 splice cassettes
- Box can be tilted downwards when open




### Standards:

50173-1, EN 61300-3-6, EN 61300-3-64

## Technical Data

|                               |                       |
|-------------------------------|-----------------------|
| Net width (mm)                | 482,50                |
| Net height (mm)               | 43,60                 |
| Netto depth (mm)              | 211,50                |
| Net weight (kg)               | 2,70                  |
| Colour                        | RAL 7035 (Light grey) |
| Min. ambient temperature (°C) | -10                   |
| Max. ambient temperature (°C) | 70                    |
| Fiber                         | 50/125 OM2 Multimode  |
| Fibre count                   | 12                    |
| Coupler/Connector             | ST                    |

## Dimension drawing

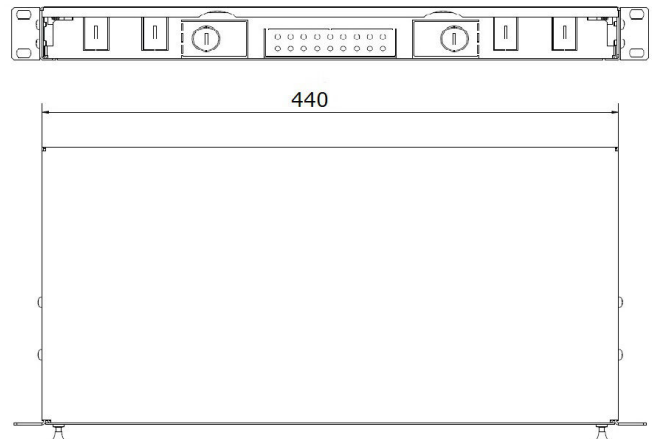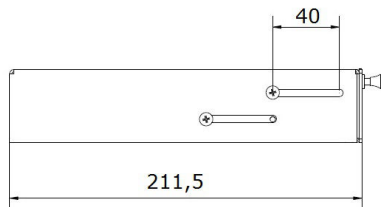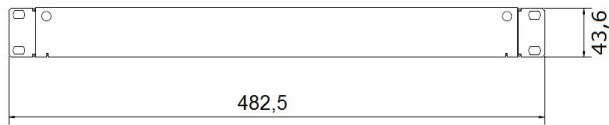

## Article Table

| DESCRIPTION                                                                                                                                                      | Order No.  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| FO Splicebox, 12 Fibers, ST, 50/125µm OM2, 19", 1U, Class B<br>acc. to IEC 61753-1, RAL7035, sliding, pigtails inserted and prepared ready for splicing, PREMIUM | HSLS125TG  |
| <b>Optional Accessories</b>                                                                                                                                      |            |
| FO shrink splice protector 60mm                                                                                                                                  | HELSP00011 |
| FO shrink splice protector 45mm                                                                                                                                  | HELSP00010 |
| FO Patchcord Duplex ST/ST,50/125µm OM2, LS0H-3, orange, 2.0m                                                                                                     | HLP25TT02F |
| FO Patchcord Duplex ST/ST,50/125µm OM2, LS0H-3, orange, 5.0m                                                                                                     | HLP25TT05F |
| FO Patchcord Duplex ST/SC,50/125µm OM2, LS0H-3, orange, 2.0m                                                                                                     | HLP25TC02F |
| FO Patchcord Duplex ST/SC,50/125µm OM2, LS0H-3, orange, 5.0m                                                                                                     | HLP25TC05F |
| FO Patchcord Duplex LC/SC,50/125µm OM2, LS0H-3, orange, 2.0m                                                                                                     | HLP25LC02F |
| FO Patchcord Duplex LC/SC,50/125µm OM2, LS0H-3, orange, 5.0m                                                                                                     | HLP25LC05F |