

Data Sheet for Article: HSELS12SCG

FO Patchpanel 19", 1U, sliding, for 12 fibers, SC, SM




RAL7035, PREMIUM



Technical Data

Net width (mm)	482,50
Net height (mm)	43,60
Netto depth (mm)	211,50
Net weight (kg)	2,70
Fiber	9/125 OS2 Singlemode
Colour	RAL 7035 (Light grey)
Min. ambient temperature (°C)	-10
Max. ambient temperature (°C)	70

Dimension drawing

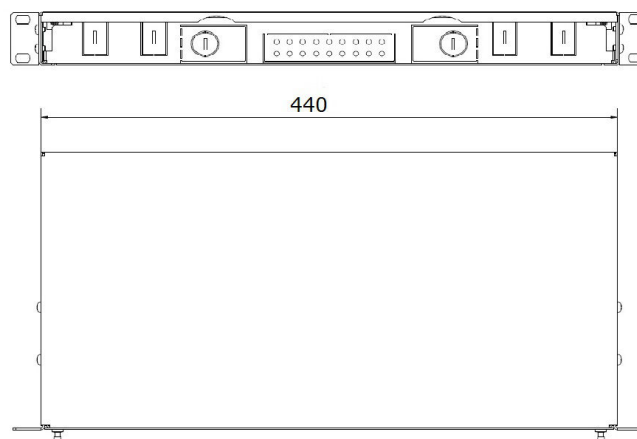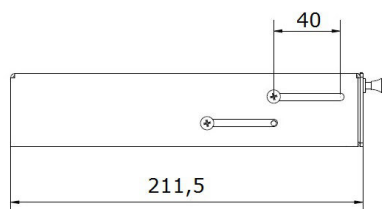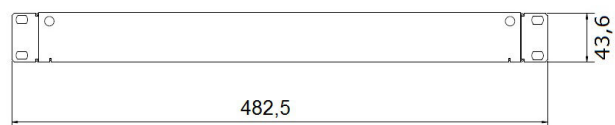

Article Table

DESCRIPTION	Order No.
FO Patchpanel 19", 1U, sliding, for 12 fibers, SC, SM RAL7035, PREMIUM	HSELS12SCG
Optional Accessories	
FO Patchcord Duplex SC/UPC - SC/UPC, 9/125µm OS2, 2.0m LSOH, yellow	HLP29CC02F
FO Patchcord Duplex SC/UPC - SC/UPC, 9/125µm OS2, 5.0m LSOH, yellow	HLP29CC05F
FO Patchcord Duplex LC/UPC - SC/UPC, 9/125µm OS2, 2.0m LSOH, yellow	HLP29LC02F
FO Patchcord Duplex LC/UPC - SC/UPC, 9/125µm OS2, 5.0m LSOH, yellow	HLP29LC05F
FO Patchcord Duplex ST/UPC - SC/UPC, 9/125µm OS2, 2.0m LSOH, yellow	HLP29TC02F
FO Patchcord Duplex ST/UPC - SC/UPC, 9/125µm OS2, 5.0m LSOH, yellow	HLP29TC05F
FO Patchcord Duplex SC/UPC - FC/UPC, 9/125µm OS2, 2.0m LSOH, yellow	HLP29CF02F
FO Patchcord Duplex SC/UPC - FC/UPC, 9/125µm OS2, 5.0m LSOH, yellow	HLP29CF05F