






Data Sheet for Article: HSELS165CG

FO Splicebox, 16 Fibers, SC, 50/125µm OM2, 19", 1U, Class B

acc. to IEC 61753-1, RAL7035, sliding, pigtails inserted and prepared ready for splicing,
PREMIUM

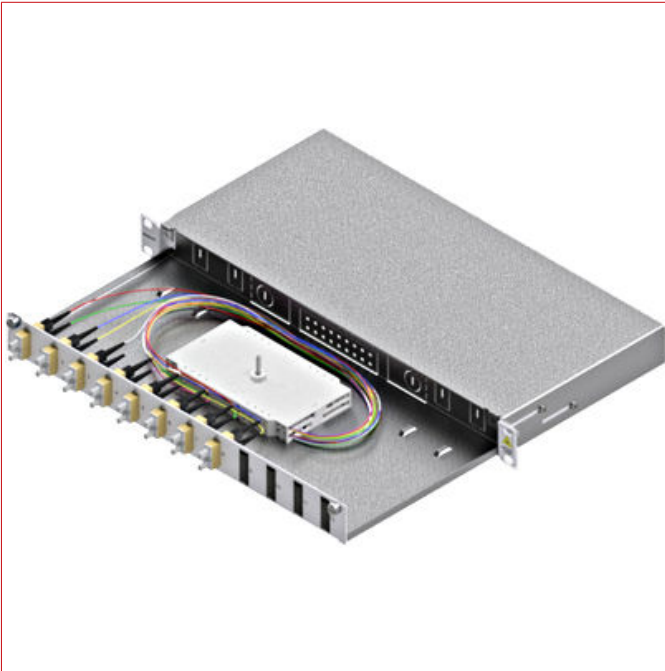

SCHRACK-Info

FO splice box extendable with quick release fastener and equipped with Grade B pigtails for splicing FO cables. The pull-out depth of 20 cm ensures easy access to the couplings. Furthermore the box can be set back by 40 mm. A possibility for the sloping input of section cables is integrated.

Properties Housing:

- 19", 1 U installation, extendable
- incl. Depth adjustment
- front panel and side parts powder-coated
- colour: grey, RAL7035
- Lid metallic glossy
- Central screw bolt for fixing up to 4 splice cassettes
- Box can be tilted downwards when open




Standards:

50173-1, EN 61300-3-6, EN 61300-3-73

Technical Data

Net width (mm)	482,50
Net height (mm)	43,60
Netto depth (mm)	211,50
Net weight (kg)	2,70
Colour	RAL 7035 (Light grey)
Min. ambient temperature (°C)	-10
Max. ambient temperature (°C)	70
Fiber	50/125 OM2 Multimode
Fibre count	16
Coupler/Connector	SC

Dimension drawing

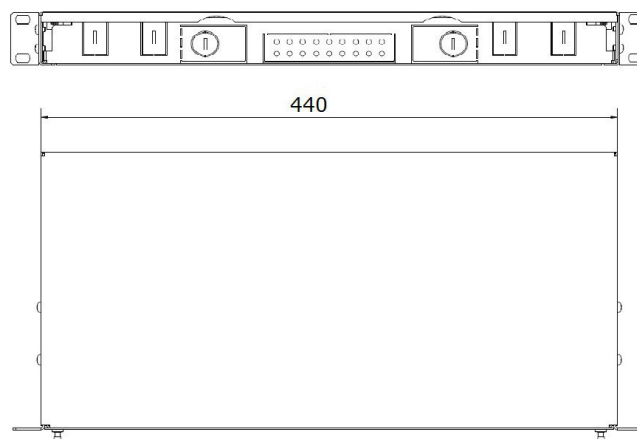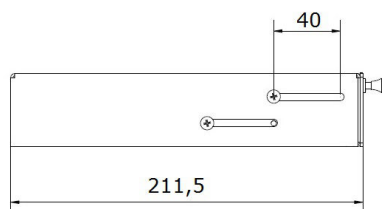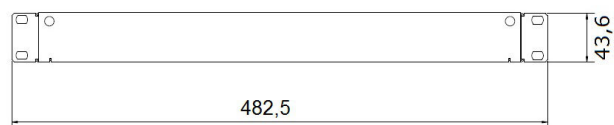

Article Table

DESCRIPTION	Order No.
FO Splicebox, 16 Fibers, SC, 50/125µm OM2, 19", 1U, Class B acc. to IEC 61753-1, RAL7035, sliding, pigtails inserted and prepared ready for splicing, PREMIUM	HSLS165CG
Optional Accessories	
FO shrink splice protector 60mm	HELSP00011
FO shrink splice protector 45mm	HELSP00010
FO Patchcord Duplex SC/SC,50/125µm OM2, LS0H-3, orange, 2.0m	HLP25CC02F
FO Patchcord Duplex SC/SC,50/125µm OM2, LS0H-3, orange, 5.0m	HLP25CC05F
FO Patchcord Duplex LC/SC,50/125µm OM2, LS0H-3, orange, 2.0m	HLP25LC02F
FO Patchcord Duplex LC/SC,50/125µm OM2, LS0H-3, orange, 5.0m	HLP25LC05F
FO Patchcord Duplex ST/SC,50/125µm OM2, LS0H-3, orange, 2.0m	HLP25TC02F
FO Patchcord Duplex ST/SC,50/125µm OM2, LS0H-3, orange, 5.0m	HLP25TC05F