






Data Sheet for Article: HSELS245FG

FO Splicebox, 24 Fibers, FC, 50/125µm OM2, 19", 1U

RAL7035, sliding, pigtails inserted and prepared ready for splicing, PREMIUM



SCHRACK-Info

FO splice box extendable with quick release fastener and equipped with Grade B pigtails for splicing FO cables. The pull-out depth of 20 cm ensures easy access to the couplings. Furthermore the box can be set back by 40 mm. A possibility for the sloping input of section cables is integrated.

Properties Housing:

- 19", 1 U installation, extendable
- incl. Depth adjustment
- front panel and side parts powder-coated
- colour: grey, RAL7035
- Lid metallic glossy
- Central screw bolt for fixing up to 4 splice cassettes
- Box can be tilted downwards when open


Standards:

50173-1, EN 61300-3-6, EN 61300-3-86

Technical Data

Net width (mm)	482,50
Net height (mm)	43,60
Netto depth (mm)	211,50
Net weight (kg)	2,70
Colour	RAL 7035 (Light grey)
Min. ambient temperature (°C)	-10
Max. ambient temperature (°C)	70
Fiber	50/125 OM2 Multimode
Fibre count	24
Coupler/Connector	FC

Dimension drawing

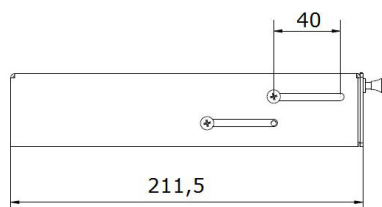

Article Table

DESCRIPTION	Order No.
FO Splicebox, 24 Fibers, FC, 50/125µm OM2, 19", 1U	HSELS245FG
RAL7035, sliding, pigtails inserted and prepared ready for splicing, PREMIUM	
Optional Accessories	
FO shrink splice protector 60mm	HELSP00011
FO shrink splice protector 45mm	HELSP00010
FO Patchcord Duplex FC/FC,50/125µm OM2, LS0H-3, orange, 2.0m	HLP25FF02F
FO Patchcord Duplex FC/FC,50/125µm OM2, LS0H-3, orange, 5.0m	HLP25FF05F
FO Patchcord Duplex SC/FC,50/125µm OM2, LS0H-3, orange, 2.0m	HLP25CF02F
FO Patchcord Duplex SC/FC,50/125µm OM2, LS0H-3, orange, 5.0m	HLP25CF05F
FO Patchcord Duplex ST/FC,50/125µm OM2, LS0H-3, orange, 2.0m	HLP25TF02F
FO Patchcord Duplex LC/FC,50/125µm OM2, LS0H-3, orange, 2.0m	HLP25LF02F
FO Patchcord Duplex LC/FC,50/125µm OM2, LS0H-3, orange, 5.0m	HLP25LF05F