






Data Sheet for Article: HSELS480CS

FO Splicebox empty for 24 SC-Duplex couplers, 1U, black

PREMIUM



SCHRACK-Info

These spliceboxes comprise an upper enclosure section, a pull-out tray and 2 depth-adjustable 19" brackets. Pull-out trays are locked via two knurled screws for 24 SC Duplex couplers

Cable-entry:

- Four break-away style openings for M20 cable-gland
- One break-away style opening for optional available cable strain-relief (HSELSFTTDM)

Material: zinc-coated steel

Installation: 19", 1U



Dimensions WxHxD: 483x44x240mm

Color: black

Technical Data

Net width (mm)	482,50
Net height (mm)	43,60
Netto depth (mm)	211,50
Net weight (kg)	2,70
Colour	RAL 9005 (black)
Min. ambient temperature (°C)	-10
Max. ambient temperature (°C)	70
Product	Empty Enclosures

Dimension drawing

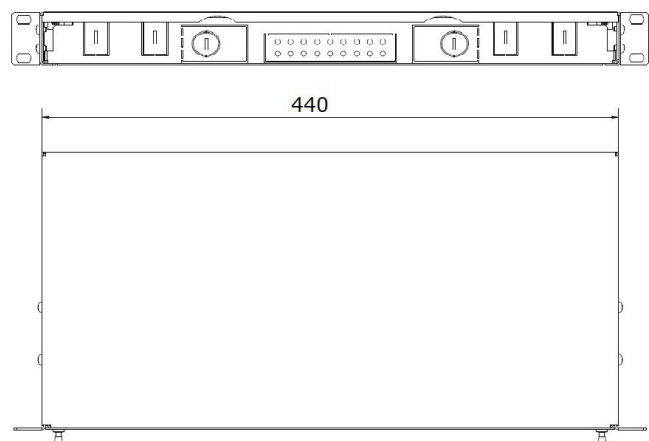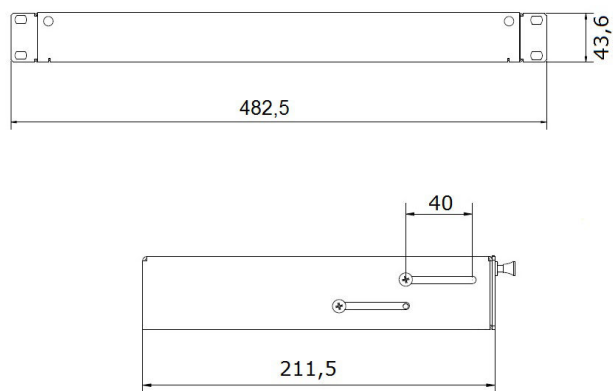

Article Table

DESCRIPTION	Order No.
FO Splicebox empty for 24 SC-Duplex couplers, 1U, black PREMIUM	HSELS480CS
Optional Accessories	
FO Splicecassette without cover, without fiber holder stackable, white, PREMIUM	HSELSZSK01
FO splice holder for 6 shrink splice protectors (HELSP0001x) black, suitable for splice cassette HSELSZSK01, PREMIUM	HSELSZSK02
FO splice cassette cover, white for HSELSZSK01 PREMIUM	HSELSZSK03
Integral hinge for connecting / stacking of HSELSZSK01, blue PREMIUM	HSELSZSK04
FO splice holder f. 12 shrink splice protectors (HELSP0001x) black, suitable for splice cassette HSELSZSK01, PREMIUM	HSELSZSK05
FO shrink splice protector 60mm	HELSP00011
Cable gland M20 LVZZKVS20	HELSP00012
Cable fittings M20x1.5, RAL 7035 Clamping range 7 - 12mm, wrench size 24mm	M270020
Metric Counter Nut M20x1.5	M271020
FO Coupler SC-Duplex, Plastic, Multimode, phbr, flange, grey	HMOL000059
FO Coupler SC-Duplex, Plastic, Singlemode, zirconia, flange, blue	HMOL000054
FO Pigtail SC, 50/125µm OM3, 2.0m, Easy Strip, aqua, 4pieces CLASSIC	HLP03C002E
FO Pigtail SC, 9/125µm OS2, 2.0m, Easy Strip, 4pcs colored according to IEC 60304, CLASSIC	HLP09C042P
FO Pigtail SC, 9/125µm OS2, 2.0m, Easy Strip, 12pcs colored according to IEC 60304, CLASSIC	HLP09C122P
FO Pigtail SC, 50/125µm OM4, 2.0m, Easy Strip, 4pcs colored according to IEC 60304, CLASSIC	HLP04C042P