


Data Sheet for Article: HSELSK03MR

FFTH FO Coupler LC/UPC-Duplex, Plastic, OM3, ceramic

without flange, aqua, dustcover-shutter, CLASSIC

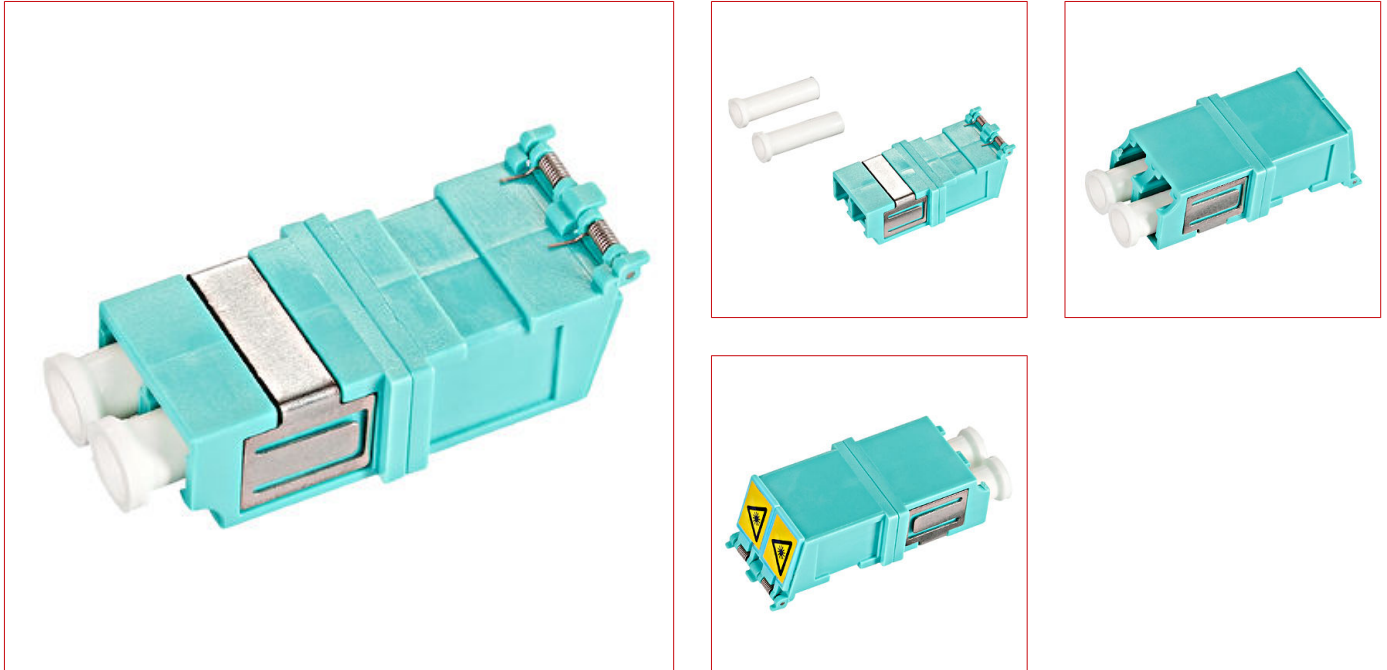

Technical Data

Net width (mm)	19,00
Net height (mm)	10,00
Net weight (kg)	0,01
Fiber	50/125 OM3 Multimode
Colour	Green
Insertion loss typical (dB)	≤0,2
Min. ambient temperature (°C)	-40
Max. ambient temperature (°C)	80
Product	coupling

Article Table

DESCRIPTION	Order No.
FFTH FO Coupler LC/UPC-Duplex, Plastic, OM3, ceramic without flange, aqua, dustcover-shutter, CLASSIC	HSELSK03MR
Optional Accessories	
FFTH Outlet Wallmount, W80xH28xD80mm Empty for 4-fibers RAL9010 Pure white, also suitable for DIN-rail installation	HSELDA40WP
FFTH FO Pigtail LC/UPC, 50/125µm OM3, 1.0m, 4 pcs Easy Strip, colored according to IEC 60304, CLASSIC	HLP03M041P
FO Pigtail LC, 50/125µm OM3, 2.0m, Easy Strip, 4pcs colored according to IEC 60304, CLASSIC	HLP03L042P
FO Pigtail LC, 50/125µm OM3, 2.0m, Easy Strip, 8pcs colored according to IEC 60304, CLASSIC	HLP03L082P
FO Pigtail LC, 50/125µm OM3, 2.0m, Easy Strip, 12pcs colored according to IEC 60304, CLASSIC	HLP03L122P