

Data Sheet for Article: HSELSK09GR

FFTH FO Coupler SC/APC-Simplex, Plastic, OS2, ceramic






without flange, green, dustcover-shutter, CLASSIC



Technical Data

Net width (mm)	19,00
Net height (mm)	10,00
Net weight (kg)	0,01
Combination of connectors	SC/APC
Fiber	9/125 OS2 Singlemode / G.657.A2
Colour	Green
Insertion loss typical (dB)	≤0,2
Min. ambient temperature (°C)	-40
Max. ambient temperature (°C)	75
Product	coupling

Dimensioned drawing: FFTH FO Coupler SC/APC-Simplex, Plastic, OS2, ceramic

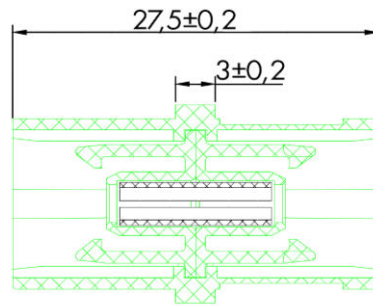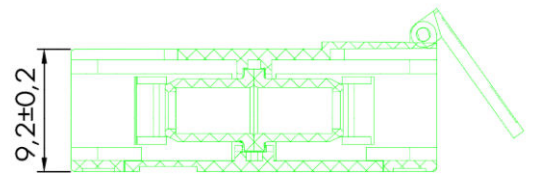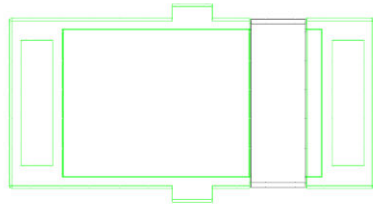

[mm]

Article Table

DESCRIPTION	Order No.
FTTH FO Coupler SC/APC-Simplex, Plastic, OS2, ceramic without flange, green, dustcover-shutter, CLASSIC	HSELSK09GR
Optional Accessories	
FTTH Outlet Wallmount, W80xH28xD80mm Empty for 4-fibers RAL9010 Pure white, also suitable for DIN-rail installation	HSELDA40WP
FTTH FO Pigtail SC/APC 8°, 9/125µm OS2 G657.A2, 1.0m, 4 pcs Easy Strip, colored according to IEC 60304, CLASSIC	HLP09D041P
FO Pigtail SC/APC, 9/125µm OS2, 2.0m, Easy Strip, 4pcs colored according to IEC 60304, CLASSIC	HLP09D042P
FO Pigtail SC/APC, 9/125µm OS2, 2.0m, Easy Strip, 8pcs colored according to IEC 60304, CLASSIC	HLP09D082P
FO Pigtail SC/APC, 9/125µm OS2, 2.0m, Easy Strip, 12pcs colored according to IEC 60304, CLASSIC	HLP09D122P