


Data Sheet for Article: HSELSK09MR

FFTH FO Coupler LC/APC-Duplex, Plastic, OS2, ceramic


without flange, green, dustcover-shutter, CLASSIC

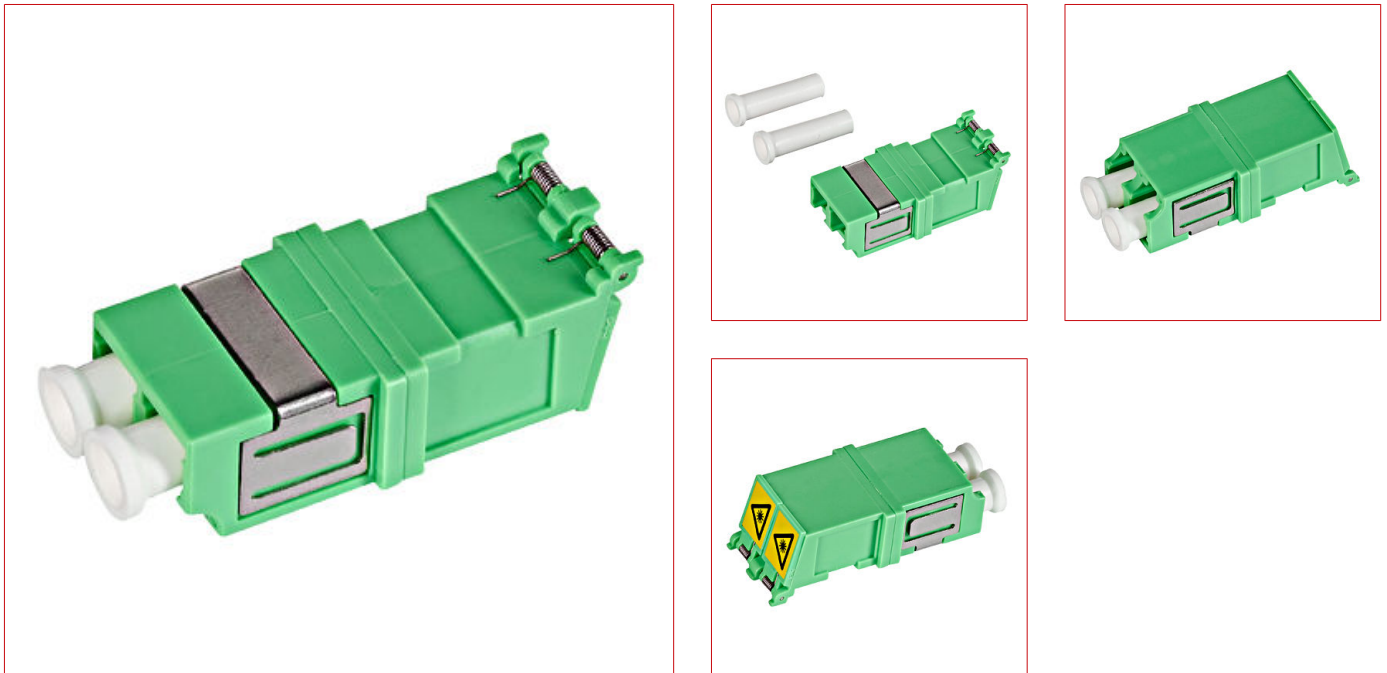

Technical Data

Net width (mm)	19,00
Net height (mm)	10,00
Net weight (kg)	0,01
Combination of connectors	LC/APC
Fiber	9/125 OS2 Singlemode / G.657.A2
Colour	Green
Insertion loss typical (dB)	≤0,2
Min. ambient temperature (°C)	-40
Max. ambient temperature (°C)	75
Product	coupling

Dimensioned drawing: FFTH FO Coupler LC/APC-Duplex, Plastic, OS2, ceramic

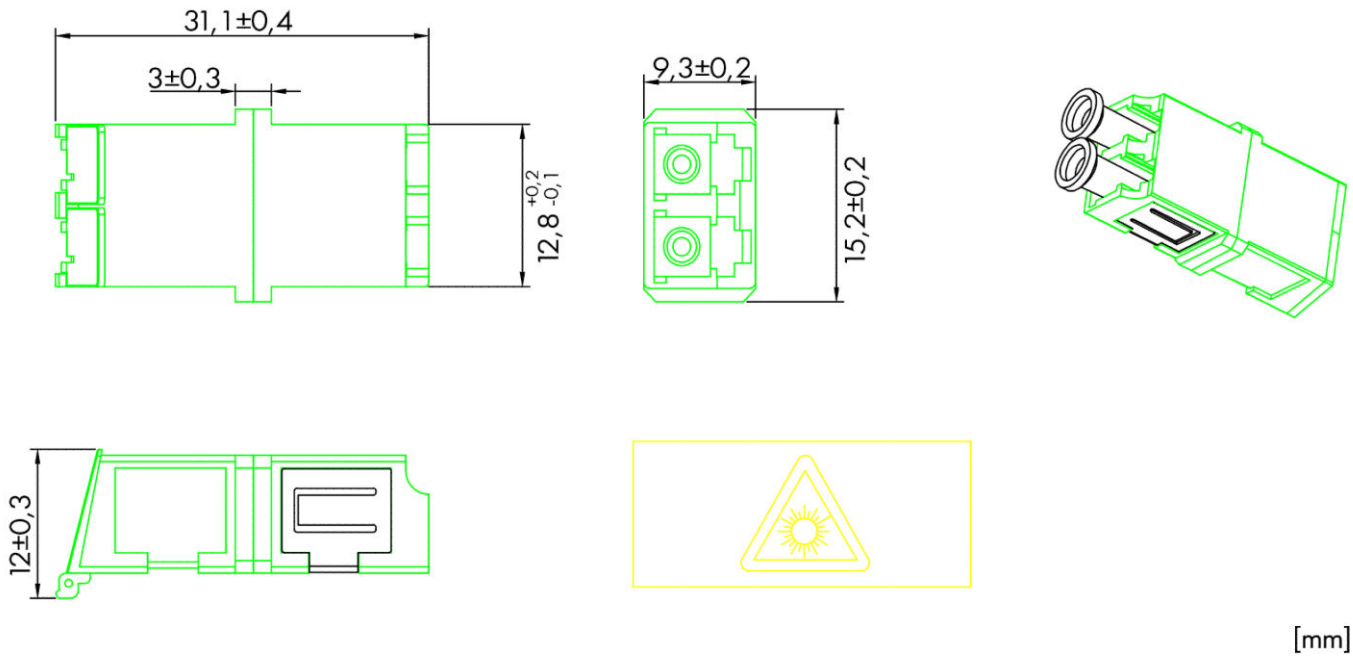

Article Table

DESCRIPTION	Order No.
FTTH FO Coupler LC/APC-Duplex, Plastic, OS2, ceramic without flange, green, dustcover-shutter, CLASSIC	HSELSK09MR
Optional Accessories	
FTTH Outlet Wallmount, W80xH28xD80mm Empty for 4-fibers RAL9010 Pure white, also suitable for DIN-rail installation	HSELDA40WP
FTTH FO Pigtail LC/APC 8°, 9/125µm OS2 G657.A2, 1.0m, 4 pcs Easy Strip, colored according to IEC 60304, CLASSIC	HLP09M041P
FO Pigtail LC/APC, 9/125µm OS2, 2.0m, Easy Strip, 4pcs colored according to IEC 60304, CLASSIC	HLP09M042P
FO Pigtail LC/APC, 9/125µm OS2, 2.0m, Easy Strip, 8pcs colored according to IEC 60304, CLASSIC	HLP09M082P
FO Pigtail LC/APC, 9/125µm OS2, 2.0m, Easy Strip, 12pcs colored according to IEC 60304, CLASSIC	HLP09M122P