


Data Sheet for Article: HSKU4233B5

U/UTP Cable Cat.6, 4x2xAWG24/1, 300MHz, LS0H-3-25, B2ca

sl,d1,a1, blue, Drum 500m

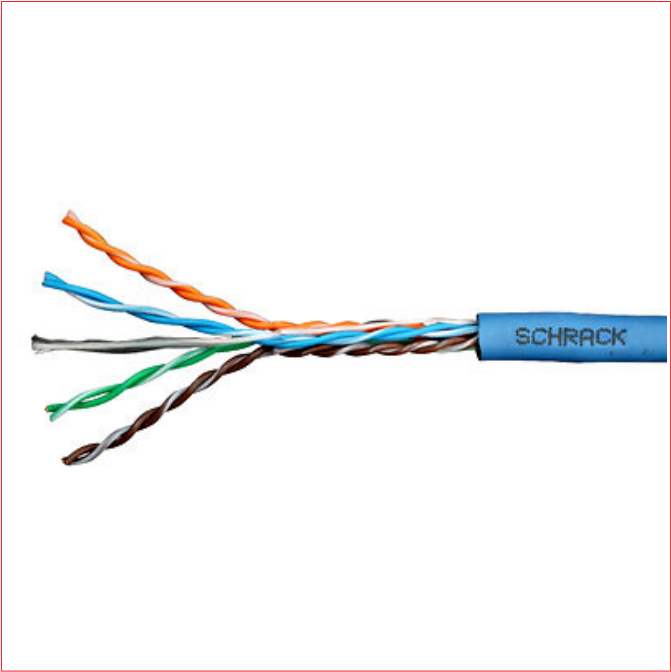

SCHRACK-Info

APPLICATION

- Horizontal and building backbone cable
- Support current and future Category 6 and 5e applications, such as: 1000Base-T (Gigabit Ethernet), 100 Base-T, 10 Base-T, FDDI, ATM

GENERAL STANDARDS

- International Standard: ISO/IEC 11801 edition 2.1 (2008)
- European Standard: EN 50173-1 (2002) and EN 50173-1 Amd.1 (2009)
- U.S. Standard: ANSI/TIA/EIA 568-B.2.1 (2002)



Technical Data

Category	Cat.6
Cable shielding	U/UTP
Conductor material	Solid bare copper AWG24/1
Conductor	4 unshielded pairs

Technical Data - continued

Color code pairs	Pair 1 White-Blue / Blue Pair 2 White-Orange / Orange Pair 3 White-Green / Green Pair 4 White-Brown / Brown
Insulation material	Polyethylene (PE)
Nominal diameter over insulation (mm)	1
Shielding	unshielded
Ripcord	Under jacket
Cable jacket	LS0H-3
Jacket	LS0H-3, FRNC according to: IEC 61034-1/2, EN 50268-1/2 IEC 60754-1/2, EN 50267-1/2 IEC 60332-3-24, EN 60332-3-24
Euroclass acc. to EN50575	B2ca
Smoke production	s1a
Droplets	d1
Acidity	a1
Burning load (kJ/m)	600
Smoke density - transmittance (%)	> 60
Amount of halogen acid gas - pH	> 4,3
Amount of halogen acid gas - Conductivity (μS/m)	< 10
Outside diameter (mm)	6,6 ± 0,3
Weight nominal (kg/km)	52
Colour	Blue
Temperature range - Installation (°C)	+0 to +50
Bending radii cable - Operation (longterm) (Ø)	4
Bending radii cable - Installation (shortterm) (Ø)	8
Max. pulling tension (N)	80
Rated voltage	< 72V DC and < 50V AC
Max. continuous current per conductor (25°C) (A)	1,5
DC resistance at 20° C (Ohm/100m)	< 9,38
Insulation resistance (MΩ*km)	> 5000MΩ/km
Resistance unbalance: within a pair / between pairs (%)	< 2 / < 4
Dielectric strength conductor – conductor (2 sec) (kV DC)	2,5
Mutual capacitance (nF/km)	< 56
Capacitance unbalance pair to ground (pF/km)	< 1600
Elongation at break of the conductors (%)	10
Minimum elongation at break of the insulation (%)	≥ 100
Minimum elongation at break of the sheath (%)	≥ 100
Tensile strength of sheath (MPa)	> 9
SKEW (ns/100m)	≤ 25
NVP (%)	70
Length/Put-ups	500m - drum

REFERENCE STANDARD: IEC 61156-5

Frequency	1	4	10	16	20	31.2	65.2	100	200	250	300	MHz
Attenuation	2	3.7	5.8	7.4	8.3	10.4	15	19.3	28.3	32.1	35.6	dB/100m
NEXT	75.3	66.3	61.8	58.6	57.1	54	49.1	45.8	40.9	39.3	38.1	dB/100m
PS NEXT	73.3	64.3	59.8	56.6	55.1	52	47.1	43.8	38.9	37.3	36.1	dB/100m
ARC	73.3	62.6	56	51.2	48.8	43.6	34.1	26.5	12.6	7.2	0.5	dB/100m
PS ACR	71.3	60.6	54	49.2	46.8	41.6	32.1	24.5	10.6	5.2	-1.5	dB/100m
FEXT	70.8	58.8	50.8	46.7	44.8	40.9	34.9	30.8	22.8	22.8	21.3	dB/100m
EL FEXT	67.8	55.8	47.8	43.7	41.8	37.9	31.9	27.8	21.8	19.8	18.3	dB/100m
Return loss	20	23	25	25	25	23.6	21.5	20.8	19.5	18	17.5	dB/100m
TCL	40	40	40	38	37	35.1	32.6	30	27	26.5	-	dB/100m
EL TCL	35	23	15	10.9	9.0	5.1	-	-	-	-	-	dB/100m
Propagation delay	570	552	545	543	540	539	538	537	537	537	536	dB/100m

* Limits below 4 MHz are informative.

TYPICAL VALUES

Frequency	1	4	10	16	20	31,2	62,5	100	200	250	300	MHz
Attenuation	1,9	3,5	5,5	7,0	7,9	9,9	14,3	18,3	27,5	31	33	dB/100m
NEXT	85	75	70	66	64	62	58	55	50	49	48	dB/100m
PS NEXT	82	72	67	63	61	59	55	52	47	46	45	dB/100m
ACR	82	71	64	59	56	52	44	37	22	18	15	dB/100m
PS ACR	79	68	61	56	53	49	41	34	19	15	12	dB/100m
ACR-F	75	67	60	54	51	48	40	38	35	32	27	dB/100m
PS ACR-F	73	65	58	52	49	47	38	37	33	30	25	dB/100m
RL	30	30	30	30	30	30	29	28	25	24	22	dB/100m

Typical values are for information only.

Article Table

DESCRIPTION	NVP (%)	COPPER WEIGHT (kg/km)	Order No.
U/UTP Cable Cat.6, 4x2xAWG24/1, 300MHz, LS0H-3-25, B2ca s1a,d1,a1, blue, Drum 500m	70	19	HSKU4233B5
Optional Accessories			
TOOLLESS LINE Jack RJ45 unshielded, Cat.6 (SFA)			HSEMRJ6UWS
Cable dispenser for 250kg Load for drums up to 52cm width			HTOOL00006
Back to back cable tie black 16mm x 4m			Q7KB0416-S
Back to back cable tie blue 16mm x 4m			Q7KB0416-B
Back to back cable tie red 16mm x 4m			Q7KB0416-R
Back to back cable tie yellow 16mm x 4m			Q7KB0416-Y
Back to back cable tie green 16mm x 4m			Q7KB0416-U