


Data Sheet for Article: IGFHK02007

FHSK Cu 2x400L ÜA(3)B/C 785/ 1350 HP

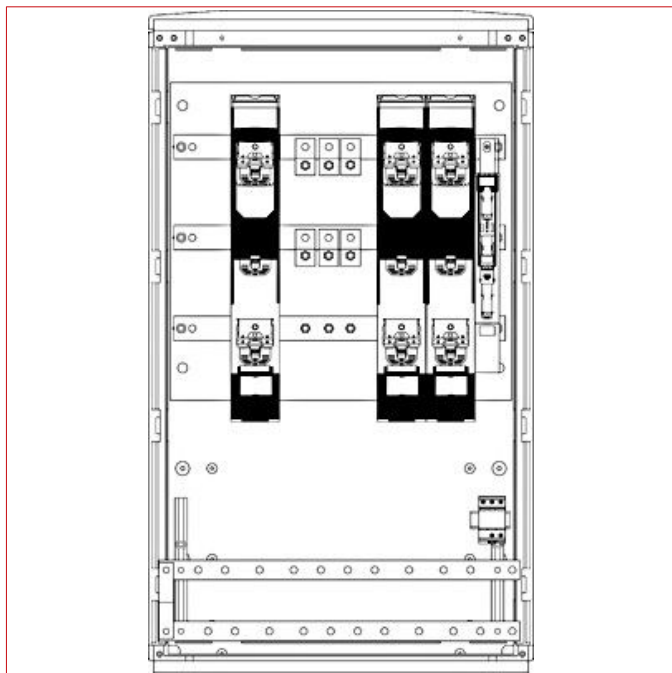

Technical Data

Net width (mm)	785,00
Net height (mm)	1.350,00
Netto depth (mm)	324,00
Net weight (kg)	38,00
EAN	9008507134878
Material	Hot-pressed Glass Fiber Reinforced Thermosetting Polyester
Austrian province	Vienna
IP Rating	IP44
Protection class	II
mounting	Free-standing
Impact Resistance	IK10
ECO	Wien
Colour	RAL 7032 (Pebble grey)
Product category	FHSK
Basic Description	Enclosure
Product standard	IEC 61439-2

Article Table

DESCRIPTION	Order No.
FHSK Cu 2x400L ÜA(3)B/C 785/1350 HP	IGFHK02007
Necessary Accessories	
Plinth Polyester size 1 / S5, RAL7032 785x950x310 mm (WxHxD)	IG714587-A
Bases Poly. extra hoch 1200mm Gr.1 H, S5 H, RAL7032	IG714588
Sockel S5S X1 1200/320 AS/ST/SC RAL 7032 (S5HS) Kunststoff-Eingrabsockel Größe 1/S5 (H=1200, T=310mm) mit 2x Zusatzplatten (für hinten und vorne), RAL7032	IG794068
Floor-mounted base Polyester size 1 / S5, RAL7032 780x250x310 mm (WxHxD)	IL190245
Bodenmontagesockel SB5 500/320 RAL 7032 Höhe 500mm	IG790287