


Data Sheet for Article: IL0833505-

Support and binding rail, 5 unit-wide, length=1102mm

height=35 depth=7.5mm, aluminium, for DIN-rail devices and cable ties up to 5mm

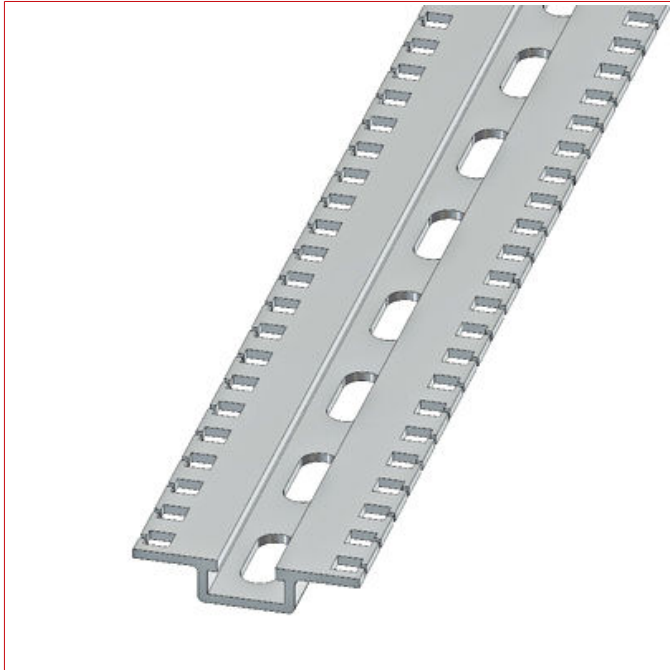

SCHRACK-Info

Robust combination rails with strain relief

Material: Aluminium (mill finish)

Support and binding rails

- For DIN-rail devices and cable ties up to 5mm
- Dimensions:
 - IL0833503, 3 unit-wide, length=682mm
 - IL0833504, 4 unit-wide, length=902mm
 - IL0833505, 5 unit-wide, length=1102mm
 - IL0833507, uncut, length=2000mm
- Applications:
 - Switchboard construction (support rails)
 - Riser installations
 - Raised floors
 - Suspended ceilings
 - Shield grounding
 - Pneumatic and hydraulic systems

Cable and conduit mounting rail

- For cable ties up to 5mm and cable clamps C 30

- Dimensions:
 - IL0835015, uncut, length=2000mm
- Applications:
 - Switchboard construction (support rails)
 - Riser systems
 - Suspended ceilings
 - Cable shield grounding
 - Pneumatic and hydraulic systems

Technical Data

Net width (mm)	1.102,00
Net height (mm)	35,00
Netto depth (mm)	7,50
Net weight (kg)	0,18
EAN	9007985030993
Material	Aluminum
Product category	mounting rails
Basic Description	Busbar

DESCRIPTION	Order No.
Support and binding rail, 5 unit-wide, length=1102mm height=35 depth=7.5mm, aluminium, for DIN-rail devices and cable ties up to 5mm	IL0833505