


Data Sheet for Article: IL144124-A

# Metering insert 1-24E compl. 1 cou. pl. front pl. st. Wien

Frontblende Stahlblech, komplett

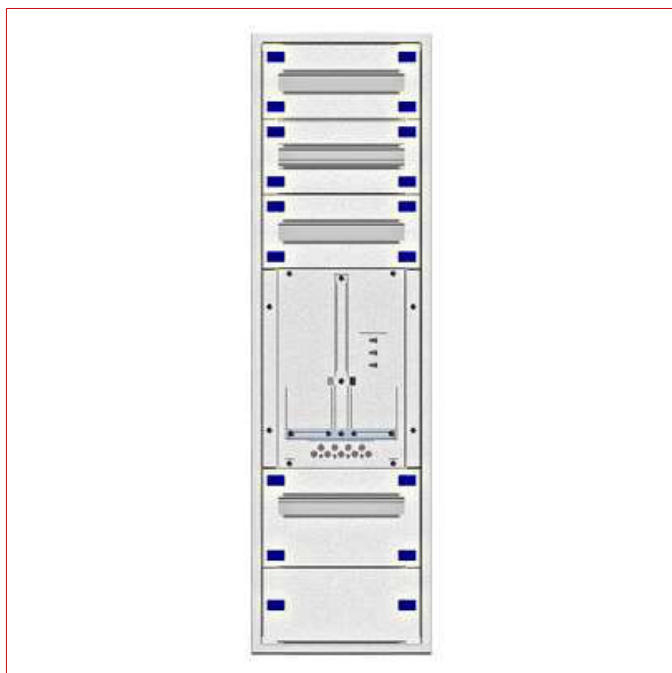

## Technical Data

|                      |                         |
|----------------------|-------------------------|
| Net width (mm)       | 290,00                  |
| Net height (mm)      | 1.105,00                |
| Netto depth (mm)     | 150,00                  |
| EAN                  | 9004840961331           |
| Product category     | Zählerverteilereinsatz  |
| Austrian province    | Vienna                  |
| Inserts              | front plates sheetsteel |
| Colour               | RAL 7035                |
| Meter width          | 1                       |
| HU                   | 24                      |
| Meter rows           | 1                       |
| Meter slots          | 1                       |
| Downstream rows      | 3                       |
| Front Plate Material | Sheet steel             |
| Basic Description    | Insert                  |
| Module widths        | 39                      |



## Article Table

| DESCRIPTION                                                                                                                                                                                                                                                                                    | COPPER WEIGHT (kg/km) | Order No.  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|------------|
| Metering insert 1-24E compl. 1 cou. pl. front pl. st. Wien<br>Frontblende Stahlblech, komplett                                                                                                                                                                                                 |                       | IL144124-A |
| <b>Optional Accessories</b>                                                                                                                                                                                                                                                                    |                       |            |
| Earthing kit 300 mm/Yf6 <sup>2</sup> assembled with all nuts, washer,...                                                                                                                                                                                                                       |                       | IL900099   |
| Plug-in counter bar 50A for Vienna, Tyrol and Styria                                                                                                                                                                                                                                           |                       |            |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from coated Copper, RoHS konform, OVE R21:2019        |                       | IL900189   |
| Plug-in counter bar 50A, PU = 64 Pieces                                                                                                                                                                                                                                                        |                       |            |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 |                       | IL900189-A |
| Plug-in counter bar pins 63A, 44mm, PU=7 pieces                                                                                                                                                                                                                                                |                       | IL900190   |
| Cover for Plug-in counter bars                                                                                                                                                                                                                                                                 |                       | IL900191   |
| Meter Connection Terminal 50A for Czech Republic, wired 1,3m                                                                                                                                                                                                                                   |                       |            |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 975                   | IL901816   |
| Meter Connection Terminal 50A for Czech Republic, wired 1,8m                                                                                                                                                                                                                                   |                       |            |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 1350                  | IL901820   |
| Meter Connection Terminal 50A for Czech Republic, wired 2,3m                                                                                                                                                                                                                                   |                       |            |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 1725                  | IL901824   |