


Data Sheet for Article: IL154583GS

Masken-Zählerverteiler 5M-33G/STMK 10ZP, H1565B1180T200mm V2

10 Meter slots, 2 Meter rows, 1 Downstream rows, 21 Module widths, Front Plate Material Sheet steel, Styria

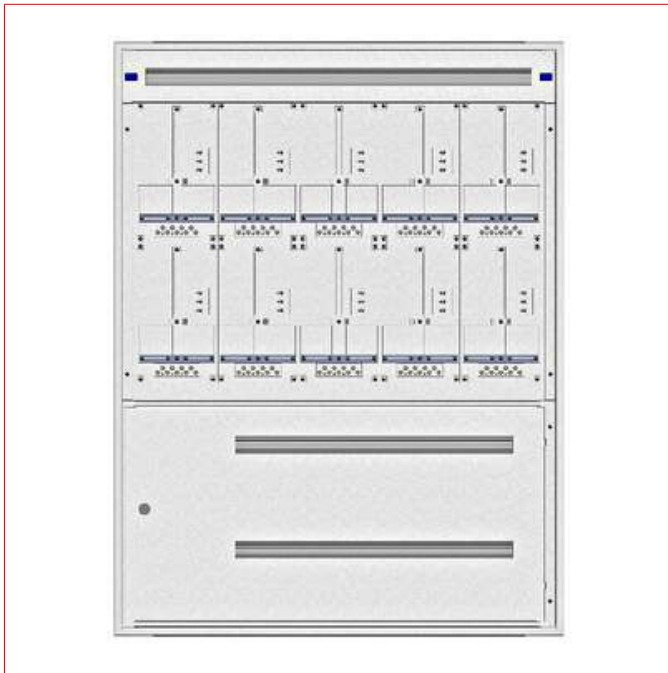

SCHRACK-Info

- Modular aufgebauter Maskenverteiler mit PVC-Rückwand ohne Tür
- Material: 1 mm pulverbeschichtetes Stahlblech
- Phosphatierter, kunststoffpulverbeschichteter Stahlblechverteiler geprüft und zertifiziert nach EN 62208:2011 und EN 60529:1991, Schutzklasse I für TT/TN und IT Netzform geeignet, schutzisoliert nach ÖVE-IM 12
- Die Ausführung des Vorzählerteils besteht aus einer Vorzähler-Türe mit Ausprägung für EVU-Schlosseinbau und Ausschnitt für Vorzählersicherungsautomaten inklusive montierter Hutschiene
- Bemessungsspannung U_e : 230/400V/50Hz
- Bemessungsisolationsspannung U_i : 1000V
- Bemessungsstoßspannungsfestigkeit U_{imp} : 6kV
- Bemessungskurzzeitstromfestigkeit I_{cw} : 25kA / 1s
- Bemessungsstoßstromfestigkeit I_{pk} : 54kA
- Bedingter Bemessungskurzschlussstrom I_{cc} : 25kA
- Schutzklasse: I
- EMV: EMV Umgebung 1
- komplett bestückt und vorverdrahtet auf Anfrage



Technical Data

Net width (mm)	1.180,00
Net height (mm)	1.565,00
Netto depth (mm)	200,00
EAN	9004840637823
Power loss (W)	-670,00
Product category	Masken-Verteiler mit Zählereinsatz kompl.
Austrian province	Styria
Inserts	front plates sheetsteel
Colour	RAL 7035
Meter width	5
HU	33
Meter rows	2
Meter slots	10
IP Rating	IP20C
Downstream rows	1
Front Plate Material	Sheet steel
Basic Description	Enclosure
Module widths	21

Article Table

DESCRIPTION	COPPER WEIGHT (kg/km)	Order No.
Masken-Zählerverteiler 5M-33G/STMK 10ZP, H1565B1180T200mm V2		
10 Meter slots, 2 Meter rows, 1 Downstream rows, 21 Module widths, Front Plate Material Sheet steel, Styria		IL154583GS
Optional Accessories		
Side panel for multi-module enclosure, 200mm (1 pair)		IL091120
Base front for M2000 multi-module enclosure, width 5		IL091050
Name strip 1000 mm long, 10 mm high, self-adhesive		BK002401
Blank cover smooth grey RAL 7035, 1000x50x8mm, Empty space cover, 45mm cap dimension, 1 m long, the cover can be shortened individually.		IL900251

Article Table

DESCRIPTION	COPPER WEIGHT (kg/km)	Order No.
Optional Accessories		
Plug-in counter bar 50A for Vienna, Tyrol and Styria		
Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from coated Copper, RoHS konform, OVE R21:2019		IL900189
Plug-in counter bar 50A, PU = 64 Pieces		
Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019		IL900189-A
Plug-in counter bar pins 63A, 44mm, PU=7 pieces		IL900190
Cover for Plug-in counter bars		IL900191
Meter Connection Terminal 50A for Czech Republic, wired 1,3m		
Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	975	IL901816
Meter Connection Terminal 50A for Czech Republic, wired 1,8m		
Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	1350	IL901820
Meter Connection Terminal 50A for Czech Republic, wired 2,3m		
Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	1725	IL901824