


Data Sheet for Article: IL164542WS

# Unterputz-Zählerverteiler 5U-42E/WIEN 5ZP, H2025B 1230T250mm

5 Meter slots, 1 Meter rows, 9 Downstream rows, 513 Module widths, Front Plate Material Sheet steel, Vienna

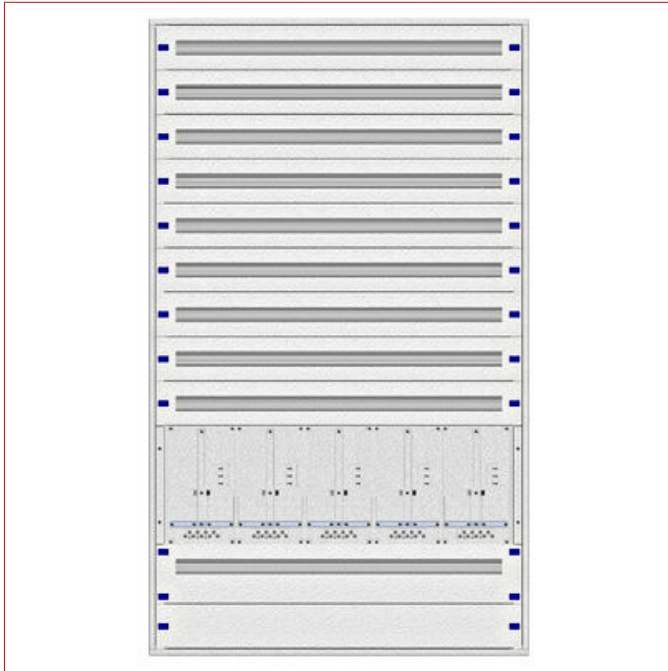

## SCHRACK-Info

- Modular aufgebauter Unterputzverteiler mit Tür und Mauerwanne
- Material: 1 mm pulverbeschichtetes Stahlblech
- Phosphatierter, kunststoffpulverbeschichteter Stahlblechverteiler geprüft und zertifiziert nach EN 62208:2011 und EN 60529:1991, Schutzklasse I für TT/TN und IT Netzform geeignet, schutzisoliert nach ÖVE-IM 12
- Standardmäßig mit einem Kunststoff-Drehriegelverschluss mit Doppelbartsperr. Beim IL308524-F und ab 28 Modulhöhen sind 2 Drehriegel pro Tür ausgeführt
- Die Ausführung des Vorzählerteils besteht aus einer Gerätefrontplatte mit 45mm Geräteausschnitt oder einer plombierbaren Abdeckung mit montierter Alu/HC Schiene oder SHC-Schiene
- Bemessungsspannung Ue: 230/400V/50Hz
- Bemessungsisolationsspannung Ui: 1000V
- Bemessungsstoßspannungsfestigkeit Uimp: 6kV
- Bemessungskurzzeitstromfestigkeit Icw: 25kA / 1s
- Bemessungsstoßstromfestigkeit Ipk: 54kA
- Bedingter Bemessungskurzschlussstrom Icc: 25kA
- Schutzklasse: I
- EMV: EMV Umgebung 1
- Farbe: RAL9016 (Verkehrsweiß) • komplett bestückt und vorverdrahtet auf Anfrage



## Technical Data

|                      |                                       |
|----------------------|---------------------------------------|
| Net width (mm)       | 1.230,00                              |
| Net height (mm)      | 2.025,00                              |
| Netto depth (mm)     | 250,00                                |
| EAN                  | 9004840630558                         |
| Power loss (W)       | -810,00                               |
| Product category     | UP-Verteiler mit Zählereinsatz kompl. |
| Austrian province    | Vienna                                |
| Inserts              | front plates sheetsteel               |
| Colour               | RAL 9016                              |
| Meter width          | 5                                     |
| HU                   | 42                                    |
| Meter rows           | 1                                     |
| Meter slots          | 5                                     |
| IP Rating            | IP20C                                 |
| Downstream rows      | 9                                     |
| Front Plate Material | Sheet steel                           |
| Basic Description    | Enclosure                             |
| Module widths        | 513                                   |

## Article Table

| DESCRIPTION                                                                                                                              | COPPER WEIGHT (kg/km) | Order No.  |
|------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|------------|
| Unterputz-Zählerverteiler 5U-42E/WIEN 5ZP, H2025B1230T250mm                                                                              |                       |            |
| 5 Meter slots, 1 Meter rows, 9 Downstream rows, 513 Module widths, Front Plate Material Sheet steel, Vienna                              |                       | IL164542WS |
| <b>Optional Accessories</b>                                                                                                              |                       |            |
| Cam cylinder 61005 for Modul enclosures with 1 key                                                                                       |                       | IL900200-F |
| Name strip 1000 mm long, 10 mm high, self-adhesive                                                                                       |                       | BK002401   |
| Blank cover smooth grey RAL 7035, 1000x50x8mm, Empty space cover, 45mm cap dimension, 1 m long, the cover can be shortened individually. |                       | IL900251   |
| Connection bracket set vertical                                                                                                          |                       |            |
| 2 pcs. connectors and 4 pcs. M5x12 screws                                                                                                |                       | IL369001   |

## Article Table

| DESCRIPTION                                                                                                                                                                                                                                                                                    | COPPER WEIGHT (kg/km) | Order No.  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|------------|
| <b>Optional Accessories</b>                                                                                                                                                                                                                                                                    |                       |            |
| Z-metal-installation-cylinder with 2 keys                                                                                                                                                                                                                                                      |                       | IL900201-F |
| Plug-in counter bar 50A for Vienna, Tyrol and Styria                                                                                                                                                                                                                                           |                       |            |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from coated Copper, RoHS konform, OVE R21:2019        |                       | IL900189   |
| Plug-in counter bar 50A, PU = 64 Pieces                                                                                                                                                                                                                                                        |                       |            |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 |                       | IL900189-A |
| Plug-in counter bar pins 63A, 44mm, PU=7 pieces                                                                                                                                                                                                                                                |                       | IL900190   |
| Cover for Plug-in counter bars                                                                                                                                                                                                                                                                 |                       | IL900191   |
| Meter Connection Terminal 50A for Czech Republic, wired 1,3m                                                                                                                                                                                                                                   |                       |            |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 975                   | IL901816   |
| Meter Connection Terminal 50A for Czech Republic, wired 1,8m                                                                                                                                                                                                                                   |                       |            |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 1350                  | IL901820   |
| Meter Connection Terminal 50A for Czech Republic, wired 2,3m                                                                                                                                                                                                                                   |                       |            |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 1725                  | IL901824   |