


Data Sheet for Article: IL172242US

Flush-mounted distribution board

2U-42K, H:2025 W:590 D:250mm

14 Installation rows, 294 Module widths, inklusive Tür, Mauerwanne, Installationseinsatz

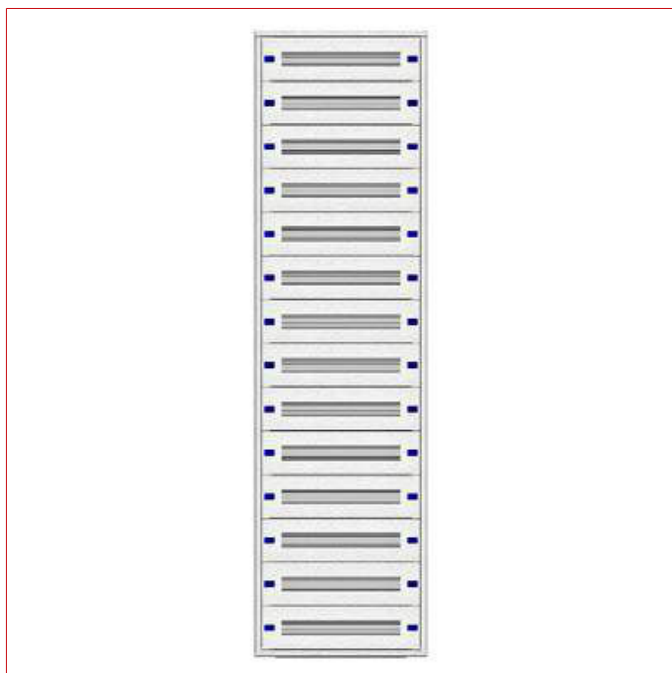

Technical Data

Net width (mm)	590,00
Net height (mm)	2.025,00
Netto depth (mm)	250,00
EAN	9004840631661
Power loss (W)	-439,00
Product category	Flush-mounted enclosure with modular chassis complete
Austrian province	Standard
Colour	RAL 9016 (Traffic White)
Meter width	2
HU	42
IP Rating	IP20C
Installation rows	14
Front Plate Material	Sheet steel
Basic Description	Distribution Board
Module widths	294

Article Table

DESCRIPTION	Order No.
Flush-mounted distribution board 2U-42K, H:2025 W:590 D:250mm 14 Installation rows, 294 Module widths, inklusive Tür, Mauerwanne, Installationseinsatz	IL172242US
Optional Accessories	
Cam cylinder 61005 for Modul enclosures with 1 key	IL900200-F
Name strip 1000 mm long, 10 mm high, self-adhesive	BK002401
Blank cover smooth grey RAL 7035, 1000x50x8mm, Empty space cover, 45mm cap dimension, 1 m long, the cover can be shortened individually.	IL900251
Connection bracket set vertical 2 pcs. connectors and 4 pcs. M5x12 screws	IL369001
Z-metal-installation-cylinder with 2 keys	IL900201-F