


Data Sheet for Article: IL172421AS

Wall-mounted distribution board

4A-21K, H:1055 W:1030 D:250mm

7 Installation rows, 315 Module widths, inklusive Tür, Aufputzrahmen, Installationseinsatz, Rückwand

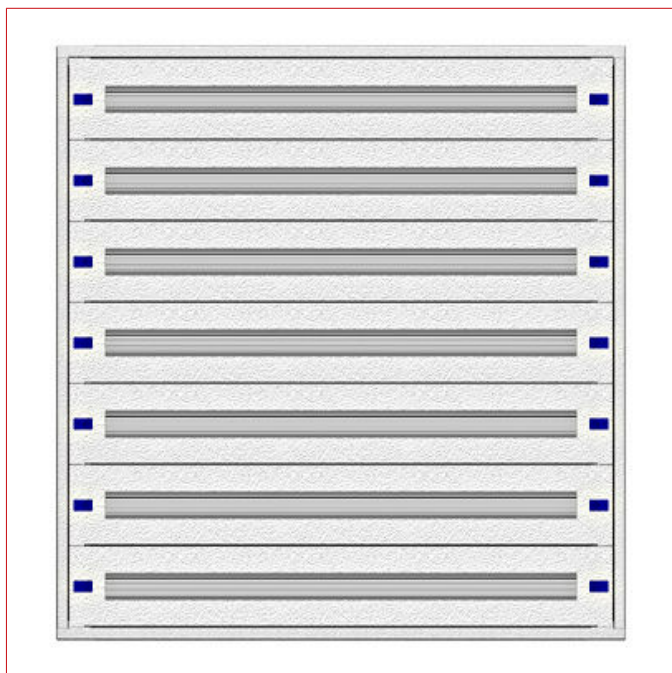

Technical Data

Net width (mm)	1.030,00
Net height (mm)	1.055,00
Netto depth (mm)	250,00
EAN	9004840632286
Power loss (W)	-454,00
Product category	Wall-mounted enclosure with modular chassis complete
Austrian province	Standard
Colour	RAL 7035 (Light grey)
Meter width	4
HU	21
IP Rating	IP20C
Protection class	I
Impact Resistance	IK08
Modul heights	21
Installation rows	7
Front Plate Material	Sheet steel

Technical Data - continued

Basic Description	Distribution Board
Module widths	315

Article Table

DESCRIPTION	Order No.
Wall-mounted distribution board 4A-21 K,H:1055 W:1030 D:250mm 7 Installation rows, 315 Module widths, inklusive Tür, Aufputzrahmen, Installationseinsatz, Rückwand	IL172421AS
Optional Accessories	
Side panels 250mm (1 pair) available for IP20-C and IP54	IL091125
Base front for wall-mounted enclosure U-Profile, width 4 redesigned U-Profile Depth 8mm, 2mm Sheet Steel	IL091400-S
Cam cylinder 61005 for Modul enclosures with 1 key	IL900200-F
Cam cylinder H36000 C/W with 2 keys	IL900202-F
Push through gland plate IP20C, IL001/006/009/036,widths 2-5 W=426 H=130 D=15 mm, Cable glands: 28x 13 mm, 16x 17 mm and 4x 30 mm	IL900102
Push through gland plate IP20C, 18x 18-30 mm cable glands for IL001/006/009/036 widths 2,3,4,5	IL900105
Wall-mounting brackets for wall-mounted frames M2000 IP20C	IL900020-F
Name strip 1000 mm long, 10 mm high, self-adhesive	BK002401
Blank cover smooth grey RAL 7035, 1000x50x8mm, Empty space cover, 45mm cap dimension, 1 m long, the cover can be shortened individually.	IL900251
Z-metal-installation-cylinder with 2 keys	IL900201-F