


Data Sheet for Article: IL172524US

Flush-mount. distribution board

5U-24K, H:1195 W:1230 D:250mm

8 Installation rows, 456 Module widths, inklusive Tür, Mauerwanne, Installationseinsatz

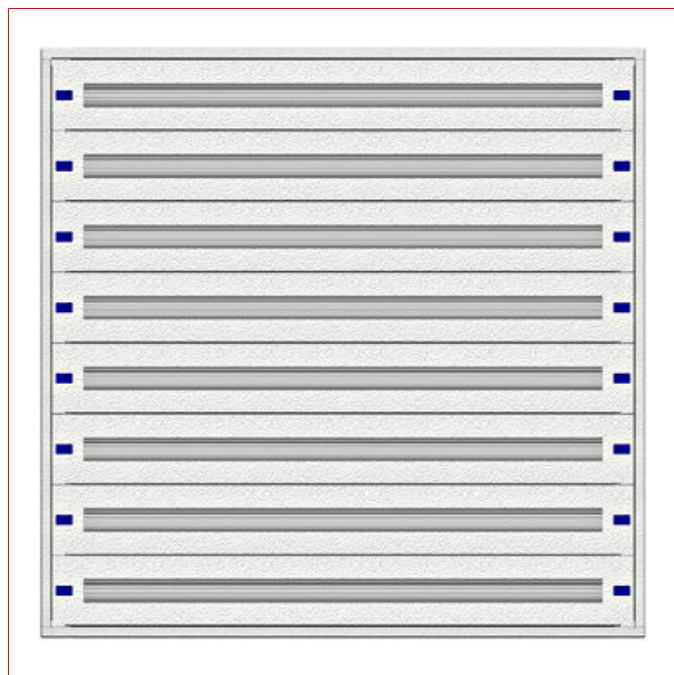

Technical Data

Net width (mm)	1.230,00
Net height (mm)	1.195,00
Netto depth (mm)	250,00
EAN	9004840632743
Power loss (W)	-495,00
Product category	Flush-mounted enclosure with modular chassis complete
Austrian province	Standard
Colour	RAL 9016 (Traffic White)
Meter width	5
HU	24
IP Rating	IP20C
Installation rows	8
Front Plate Material	Sheet steel
Basic Description	Distribution Board
Module widths	456

Article Table

DESCRIPTION	Order No.
Flush-mount. distribution board 5U-24K, H: 1195 W: 1230 D: 250mm 8 Installation rows, 456 Module widths, inklusive Tür, Mauerwanne, Installationseinsatz	IL172524US
Optional Accessories	
Cam cylinder 61005 for Modul enclosures with 1 key	IL900200-F
Name strip 1000 mm long, 10 mm high, self-adhesive	BK002401
Blank cover smooth grey RAL 7035, 1000x50x8mm, Empty space cover, 45mm cap dimension, 1 m long, the cover can be shortened individually.	IL900251
Connection bracket set vertical 2 pcs. connectors and 4 pcs. M5x12 screws	IL369001
Z-metal-installation-cylinder with 2 keys	IL900201-F