


Data Sheet for Article: IL172542AV

Aufputz-Installationsverteiler 5A-42K/VBG, H2025B 1230T250mm

7 Installation rows, 798 Module widths, Vorarlberg, inklusive Tür, Aufputzrahmen,
Installationseinsatz, Rückwand

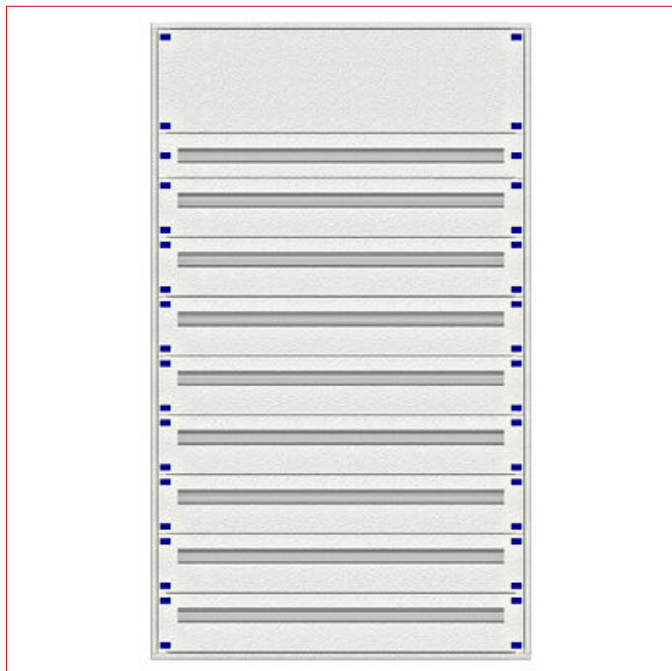

Technical Data

Net width (mm)	1.230,00
Net height (mm)	2.025,00
Netto depth (mm)	250,00
EAN	9004840657289
Power loss (W)	-930,00
Product category	Wall-mounted enclosure with modular chassis complete
Austrian province	Vorarlberg
Inserts	front plates sheetsteel
Colour	RAL 7035
Meter width	5
HU	42
IP Rating	IP20C
Installation rows	7
Front Plate Material	Sheet steel
Basic Description	Distribution Board
Module widths	798

Article Table

DESCRIPTION	Order No.
Aufputz-Installationsverteiler 5A-42K/VBG, H2025B1230T250mm 7 Installation rows, 798 Module widths, Vorarlberg, inklusive Tür, Aufputzrahmen, Installationseinsatz, Rückwand	IL172542AV
Optional Accessories	
Side panels 250mm (1 pair) available for IP20-C and IP54	IL091125
Base front for wall-mounted enclosure U-Profile, width 5 redesigned U-Profile Depth 8mm, 2mm Sheet Steel	IL091500-S
Cam cylinder 61005 for Modul enclosures with 1 key	IL900200-F
Cam cylinder H36000 C/W with 2 keys	IL900202-F
Push through gland plate IP20C, IL001/006/009/036,widths 2-5 W=426 H=130 D=15 mm, Cable glands: 28x 13 mm, 16x 17 mm and 4x 30 mm	IL900102
Push through gland plate IP20C, 18x 18-30 mm cable glands for IL001/006/009/036 widths 2,3,4,5	IL900105
Wall-mounting brackets for wall-mounted frames M2000 IP20C	IL900020-F
Name strip 1000 mm long, 10 mm high, self-adhesive	BK002401
Blank cover smooth grey RAL 7035, 1000x50x8mm, Empty space cover, 45mm cap dimension, 1 m long, the cover can be shortened individually.	IL900251
Z-metal-installation-cylinder with 2 keys	IL900201-F