


Data Sheet for Article: IL172545AS

Wall-mounted distribution board

5A-45K, H:2160 W:1230 D:250mm

15 Installation rows, 855 Module widths, inklusive Tür, Aufputzrahmen, Installationseinsatz, Rückwand

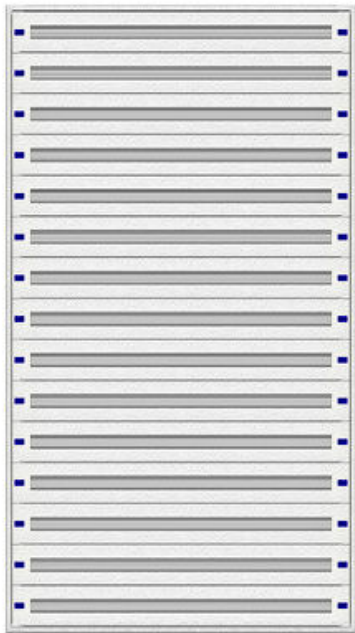

Technical Data

Net width (mm)	1.230,00
Net height (mm)	2.160,00
Netto depth (mm)	250,00
EAN	9004840633009
Power loss (W)	-986,00
Product category	Wall-mounted enclosure with modular chassis complete
Austrian province	Standard
Colour	RAL 7035 (Light grey)
Meter width	5
HU	45
IP Rating	IP20C
Protection class	I
Impact Resistance	IK08
Modul heights	45
Installation rows	15
Front Plate Material	Sheet steel

Technical Data - continued

Basic Description	Distribution Board
Module widths	855

Article Table

DESCRIPTION	Order No.
Wall-mounted distribution board 5A-45K, H:2160 W:1230 D:250mm 15 Installation rows, 855 Module widths, inklusive Tür, Aufputzrahmen, Installationseinsatz, Rückwand	IL172545AS
Optional Accessories	
Side panels 250mm (1 pair) available for IP20-C and IP54	IL091125
Base front for wall-mounted enclosure U-Profile, width 5 redesigned U-Profile Depth 8mm, 2mm Sheet Steel	IL091500-S
Cam cylinder 61005 for Modul enclosures with 1 key	IL900200-F
Cam cylinder H36000 C/W with 2 keys	IL900202-F
Push through gland plate IP20C, IL001/006/009/036,widths 2-5 W=426 H=130 D=15 mm, Cable glands: 28x 13 mm, 16x 17 mm and 4x 30 mm	IL900102
Push through gland plate IP20C, 18x 18-30 mm cable glands for IL001/006/009/036 widths 2,3,4,5	IL900105
Wall-mounting brackets for wall-mounted frames M2000 IP20C	IL900020-F
Name strip 1000 mm long, 10 mm high, self-adhesive	BK002401
Blank cover smooth grey RAL 7035, 1000x50x8mm, Empty space cover, 45mm cap dimension, 1 m long, the cover can be shortened individually.	IL900251
Z-metal-installation-cylinder with 2 keys	IL900201-F