


## Tiwag insert 3EK28-T25 counter bar

vorverdrahtet mit Hauptabzweigklemme 5 x 35mm<sup>2</sup> isoliert, Überspannungsableiter Vartec 255V / 20kA TN-C Set, Tarifschalter 20-32A, Zählerschleife 10mm<sup>2</sup> + Zähleranschlussklemme 4-pol. montiert, FI-Schalter 40A, 4-polig, 30mA, vsf., Bauart G, Typ A, PE-Schiene 16mm<sup>2</sup> + Nullungsverbindung Ym 16mm<sup>2</sup>

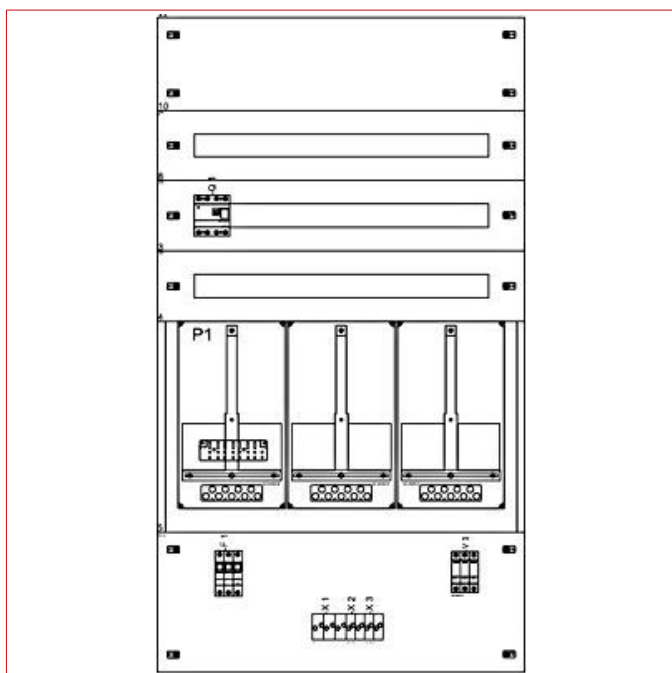

### Technical Data

|                      |               |
|----------------------|---------------|
| EAN                  | 9004840966619 |
| Austrian province    | Tyrol         |
| Meter width          | 3             |
| HU                   | 28            |
| Meter rows           | 1             |
| Meter slots          | 3             |
| Downstream rows      | 4             |
| Front Plate Material | Sheet steel   |
| Basic Description    | Insert        |
| Module widths        | 132           |



## Article Table

| DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                        | COPPER WEIGHT (kg/km) | Order No.  |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|------------|
| <p>Tiwag insert 3EK28-T25 counter bar</p> <p>vorverdrahtet mit Hauptabzweigklemme 5 x 35mm<sup>2</sup> isoliert, Überspannungsableiter Vartec 255V / 20kA TN-C Set, Tarifschalter 20-32A, Zählerschleife 10mm<sup>2</sup> + Zähleranschlussklemme 4-pol. montiert, FI-Schalter 40A, 4-polig, 30mA, vsf., Bauart G, Typ A, PE-Schiene 16mm<sup>2</sup> + Nullungsverbindung Ym 16mm<sup>2</sup></p> |                       | IL190028-A |
| <b>Optional Accessories</b>                                                                                                                                                                                                                                                                                                                                                                        |                       |            |
| Earthing kit 300 mm/Yf6 <sup>2</sup> assembled with all nuts, washer,...                                                                                                                                                                                                                                                                                                                           |                       | IL900099   |
| <p>Plug-in counter bar 50A for Vienna, Tyrol and Styria</p> <p>Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm<sup>2</sup>, flexible with crimped ferrule, Material Terminal Inserts from coated Copper, RoHS konform, OVE R21:2019</p>                                           |                       | IL900189   |
| <p>Plug-in counter bar 50A, PU = 64 Pieces</p> <p>Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm<sup>2</sup>, flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019</p>                                                 |                       | IL900189-A |
| Plug-in counter bar pins 63A, 44mm, PU=7 pieces                                                                                                                                                                                                                                                                                                                                                    |                       | IL900190   |
| Cover for Plug-in counter bars                                                                                                                                                                                                                                                                                                                                                                     |                       | IL900191   |
| <p>Meter Connection Terminal 50A for Czech Republic, wired 1,3m</p> <p>Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm<sup>2</sup>, flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019</p>                            | 975                   | IL901816   |
| <p>Meter Connection Terminal 50A for Czech Republic, wired 1,8m</p> <p>Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm<sup>2</sup>, flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019</p>                            | 1350                  | IL901820   |
| <p>Meter Connection Terminal 50A for Czech Republic, wired 2,3m</p> <p>Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm<sup>2</sup>, flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019</p>                            | 1725                  | IL901824   |