


Data Sheet for Article: IL198289-A

# Metering insert 2-39G compl. 4 cou. pl. front pl. st. STMK

Frontblende Stahlblech

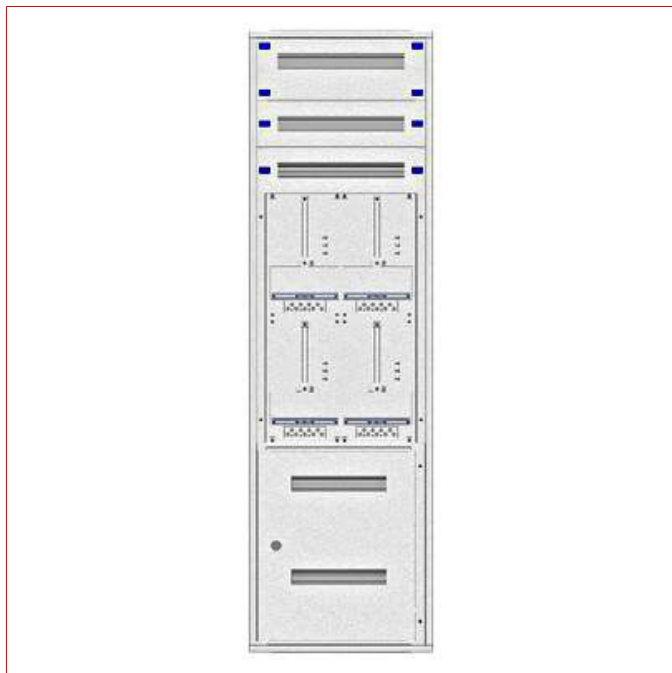

## Technical Data

|                      |                        |
|----------------------|------------------------|
| Net width (mm)       | 500,00                 |
| Net height (mm)      | 1.795,00               |
| Netto depth (mm)     | 102,00                 |
| EAN                  | 9004840967357          |
| Product category     | Zählerverteilereinsatz |
| Austrian province    | Styria                 |
| Inserts              | front plates plastic   |
| Colour               | RAL 7035               |
| Meter width          | 2                      |
| HU                   | 39                     |
| Meter rows           | 2                      |
| Meter slots          | 4                      |
| Downstream rows      | 3                      |
| Front Plate Material | Sheet steel            |
| Basic Description    | Insert                 |
| Module widths        | 63                     |



## Article Table

| DESCRIPTION                                                                                                                                                                                                                                                                                    | COPPER WEIGHT (kg/km) | Order No.  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|------------|
| Metering insert 2-39G compl. 4 cou. pl. front pl. st. STMK<br>Frontblende Stahlblech                                                                                                                                                                                                           |                       | IL198289-A |
| <b>Optional Accessories</b>                                                                                                                                                                                                                                                                    |                       |            |
| Earthing kit 300 mm/Yf6 <sup>2</sup> assembled with all nuts, washer,...                                                                                                                                                                                                                       |                       | IL900099   |
| Plug-in counter bar 50A for Vienna, Tyrol and Styria                                                                                                                                                                                                                                           |                       |            |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from coated Copper, RoHS konform, OVE R21:2019        |                       | IL900189   |
| Plug-in counter bar 50A, PU = 64 Pieces                                                                                                                                                                                                                                                        |                       |            |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 |                       | IL900189-A |
| Plug-in counter bar pins 63A, 44mm, PU=7 pieces                                                                                                                                                                                                                                                |                       | IL900190   |
| Cover for Plug-in counter bars                                                                                                                                                                                                                                                                 |                       | IL900191   |
| Meter Connection Terminal 50A for Czech Republic, wired 1,3m                                                                                                                                                                                                                                   |                       |            |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 975                   | IL901816   |
| Meter Connection Terminal 50A for Czech Republic, wired 1,8m                                                                                                                                                                                                                                   |                       |            |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 1350                  | IL901820   |
| Meter Connection Terminal 50A for Czech Republic, wired 2,3m                                                                                                                                                                                                                                   |                       |            |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 1725                  | IL901824   |