


Data Sheet for Article: IL372821US

Flat Enclosure Flush mounted 3U-21K, H=1055 W=810 D=100mm

7 Installation rows, 231 Module widths, 3 Part System, IP20C

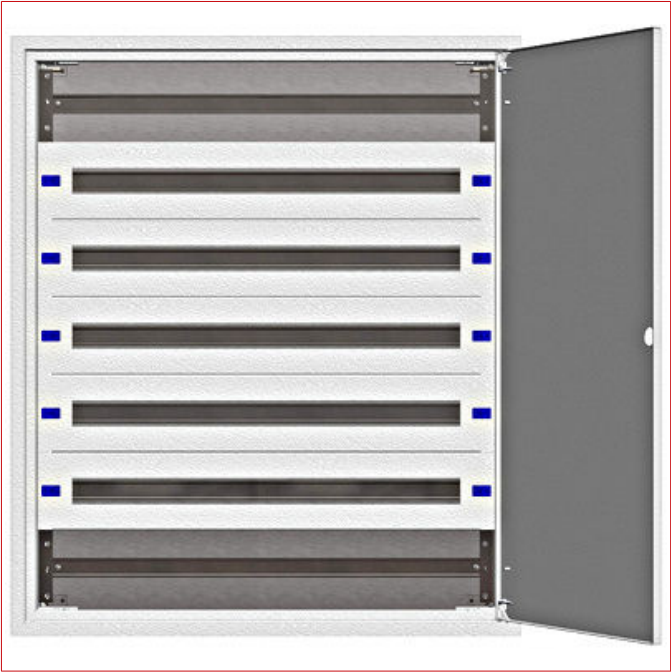

Technical Data


Net width (mm)	810,00
Net height (mm)	1.055,00
Netto depth (mm)	100,00
EAN	9004840886634
Power loss (W)	-261,00
Product category	Flush-mounted enclosure with modular chassis complete
Austrian province	Standard
Colour	RAL 9016 (Traffic White)
Meter width	3
HU	21
IP Rating	IP20C
Installation rows	7
Front Plate Material	Sheet steel
Basic Description	Enclosure

Technical Data - continued

Module widths

231

Dimensioned drawing: Flat Enclosure Flush mounted 3U-21K, H=1055 W=810 D=100mm

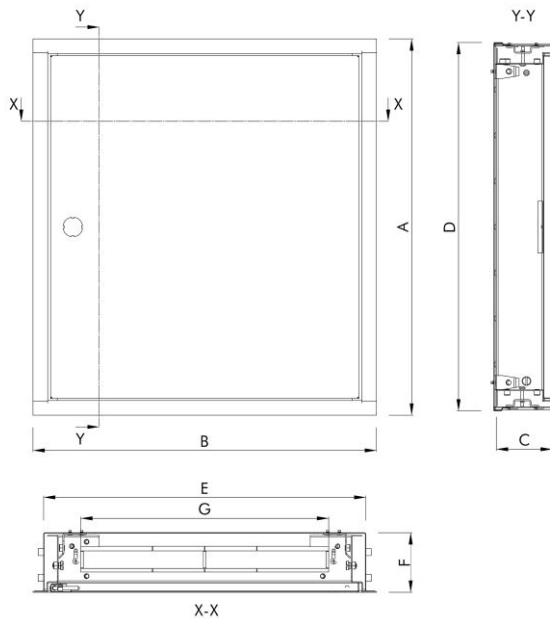

Datei Tabelle: Flat Enclosure Flush mounted 3U-21K, H=1055 W=810 D=100mm

Type	Artikelnummern		A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]	Verlustleistung [W]*
	Komplett	UP-Rahmen + Mauerwanne								
2U12	IL372912US	IL312212-F + IL367212-F	640	586	97	630	550	100	423	-122
2U18	IL372918US	IL312218-F + IL367218-F	915	586	97	905	550	100	423	-171
2U21	IL372921US	IL312221-F + IL367221-F	1055	586	97	1045	550	100	423	-195
2U24	IL372924US	IL312224-F + IL367224-F	1190	586	97	1180	550	100	423	-220
3U12	IL372812US	IL312312-F + IL367312-F	640	806	97	630	770	100	643	-163
3U18	IL372818US	IL312318-F + IL367318-F	915	806	97	905	770	100	643	-228
3U21	IL372821US	IL312321-F + IL367321-F	1055	806	97	1045	770	100	643	-261
3U24	IL372824US	IL312324-F + IL367324-F	1190	806	97	1180	770	100	643	-294

* Max. Abstrahlleistung des Gehäuses, berechnet als Einzelgehäuse bei Wandeinbau und einem $\Delta T = 35K$.

Detailinformationen und Rechtshinweise siehe Seite 2

DESCRIPTION	Order No.
Flat Enclosure Flush mounted 3U-21K, H=1055 W=810 D=100mm 7 Installation rows, 231 Module widths, 3 Part System, IP20C	IL372821US