


Data Sheet for Article: IL423539-A

Zählerverteiler Einsatz 5-39G, 10 Zählerplätze, Tirol

Frontblende Stahlblech, komplett

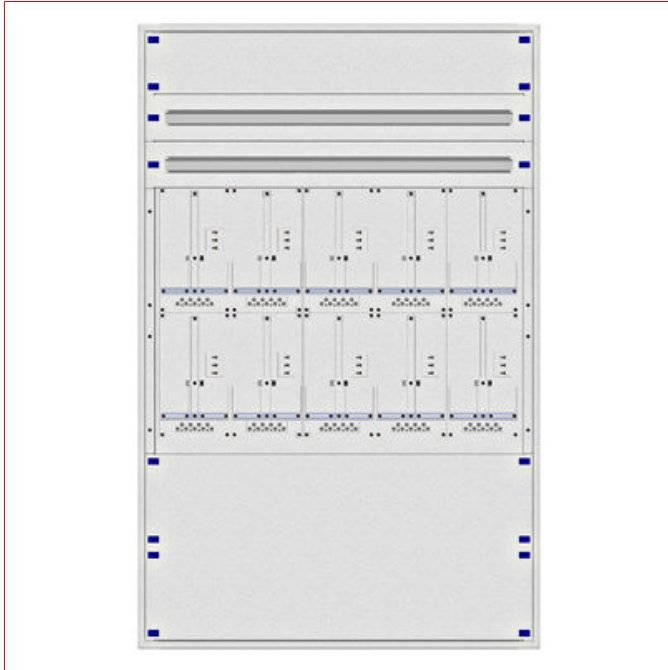

Technical Data

Net width (mm)	1.140,00
Net height (mm)	1.795,00
Netto depth (mm)	150,00
EAN	9004840967142
Product category	Zählerverteilereinsatz
Austrian province	Tyrol
Inserts	front plates sheetsteel
Colour	RAL 7035
Meter width	5
HU	39
Meter rows	2
Meter slots	10
Downstream rows	2
Front Plate Material	Sheet steel
Basic Description	Insert
Module widths	114

Article Table

DESCRIPTION	COPPER WEIGHT (kg/km)	Order No.
Zählerverteiler Einsatz 5-39G, 10 Zählerplätze, Tirol Frontblende Stahlblech, komplett		IL423539-A
Optional Accessories		
Earthing kit 300 mm/Yf6 ² assembled with all nuts, washer,...		IL900099
Plug-in counter bar 50A for Vienna, Tyrol and Styria		
Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from coated Copper, RoHS konform, OVE R21:2019		IL900189
Plug-in counter bar 50A, PU = 64 Pieces		
Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019		IL900189-A
Plug-in counter bar pins 63A, 44mm, PU=7 pieces		IL900190
Cover for Plug-in counter bars		IL900191
Meter Connection Terminal 50A for Czech Republic, wired 1,3m		
Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	975	IL901816
Meter Connection Terminal 50A for Czech Republic, wired 1,8m		
Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	1350	IL901820
Meter Connection Terminal 50A for Czech Republic, wired 2,3m		
Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	1725	IL901824