

Data Sheet for Article: IM009019--

Wall-mounting plastic enclosure 1-row, 3MW with drop lid

IP55



SCHRACK-Technik

- With transparent hinged lid, 1-row 3MW
- Rated voltage 400VAC / In=63A
- Impact resistance: IK09
- Ambient temperature: -15° to +60°C
- Glow wire test: 650°C
- Knockouts: PG
- Material: polystyrole, halogen free
- RAL7035 light grey




Technical Data

Net width (mm)	83,00
Net height (mm)	175,00
Netto depth (mm)	106,00
Net weight (kg)	0,40

Technical Data - continued

EAN	9004840040135
Power loss (W)	-8,00
Version	wall mounted with door
Door material	Plastic
Rows	1
MW per row	3
IP Rating	IP55
Colour	RAL 7035

Dimensioned drawing: Wall-mounting plastic enclosure 1-row, 3MW with drop lid

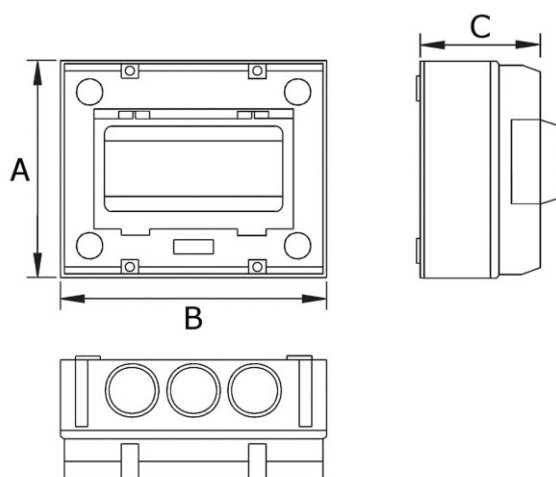

Datei Tabelle: Wall-mounting plastic enclosure 1-row, 3MW with drop lid

Article number	A [mm]	B [mm]	C [mm]	Rows	MW	Knockouts top/bottom	Knockouts on the side	N-terminal [mm ²]	PE-terminal [mm ²]
IM009019	175	83	106	1	3	1x PG16/21	-	4x6	4x6
IM009020	175	125	114	1	5	2x PG16/21	2x PG16/21	4x6	4x6
IM009021	175	215	114	1	8	3x PG16/21	2x PG16/21	2x10 + 6x6	2x10 + 6x6
IM009022	200	287	124	1	13	2x PG 11, 2x PG 21, 1x PG 29	-	2x10 + 10x6	2x10 + 10x6

* Information about max. radiate performance of enclosure, see technical tables in attachment from page?

Article Table

DESCRIPTION	Order No.
Wall-mounting plastic enclosure 1-row, 3MW with drop lid IP55	IM009019