

Auxiliary Contact 1NO/1NC for INSE

Nicht für INSR, INSP und INSA zu verwenden, Version accessories, IP Rating IP20 (terminals)




Technical Data

Version	accessories
Standard	IEC 60947, EN 60947, VDE 0660
Rated insulation voltage [Ui] (V)	500
Frequency (Hz)	50/60
Operating Current	AC-15 - 120V - 6A AC-15 - 230V - 3A DC-13 - 250V - 0.3A DC-13 - 125V - 1.1A AC-15 - 500V - 1.4A
Connections	
Tightening torque (Nm)	1, 10
Connection cross-section, multi-wire (mm²)	2x0,75-4
Connection cross section, single wire (mm²)	0,75-4
Connection cross-section, flexible wire with ferrule (mm²)	2x0,75-4
Retrofit contacts	
Auxiliary contacts	The number of auxiliary contacts that can be installed on the various switches is specified in detail in the respective data sheet for the item.
Operating temperature	-25°C to +55°C
Mechanical durability	100000 switching cycles


Technical Data - continued

Power loss per pole (W)	0,35
Protection against direct contact	finger-proof and back-of-hand-proof according to VDE 0106 Part 100
IP Rating	IP20 (terminals)
Lockable	No
Net length (mm)	32,00
Net width (mm)	50,00
Net height (mm)	10,60
Min. ambient temperature (°C)	-25
Max. ambient temperature (°C)	55

Schaltbild INSHK002--



Maßbild INSHK002--

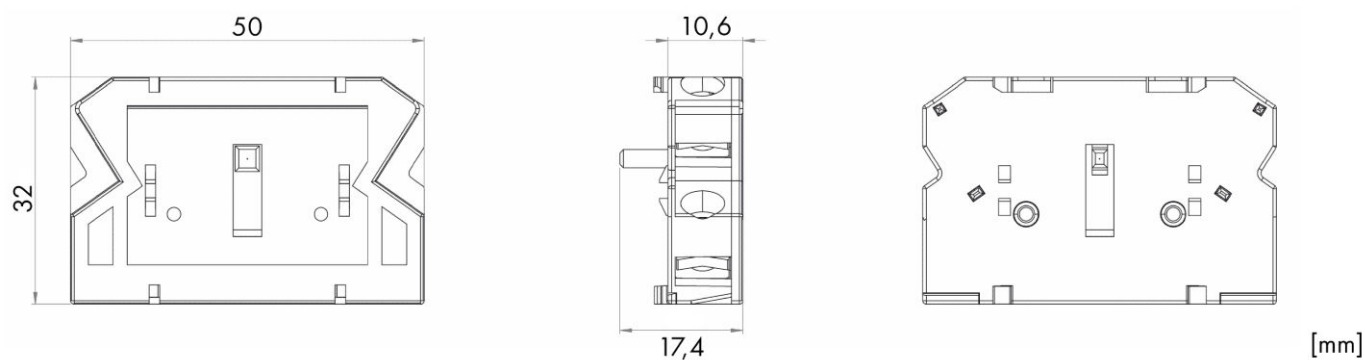

DESCRIPTION	Order No.
Auxiliary Contact 1NO/1NC for INSE	INSHK002
Nicht für INSR, INSP und INSA zu verwenden, Version accessories, IP Rating IP20 (terminals)	