


Data Sheet for Article: IP1086466-

High-current terminal for aluminum and copper, UBAL 50 BU

nominal current: 145 A, connection method: Screw connection, cross section: 6 - 50 mm², blue

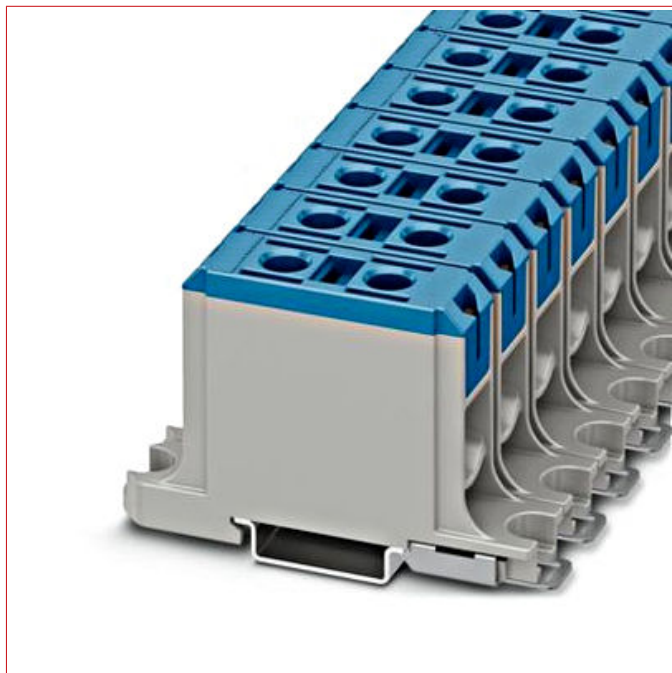

Technical Data

Netto depth (mm)	51,00
Net width (mm)	19,20
Net height (mm)	82,50
Net weight (kg)	0,02
EAN	4055626877891
Power loss (W)	4,73
Min. ambient temperature (°C)	-60
Max. ambient temperature (°C)	85
Basic Description	Terminal
System	screw clamp terminals
Series	UBAL
Version	High current terminal
Max. cross section, solid wire (mm ²)	70
Max. cross section, flexible wire (mm ²)	70
Max. cross section, flexible wire with ferrule (mm ²)	50
Min. cross section, solid wire (mm ²)	10

Technical Data - continued

Min. cross section, flexible wire (mm ²)	10
Min. cross section, flexible wire with ferrule (mm ²)	10
Cross-section (mm ²)	70
Colour	Blue
Rated current (A)	145

DESCRIPTION	Order No.
High-current terminal for aluminum and copper, UBAL 50 BU nominal current: 145 A, connection method: Screw connection, cross section: 6 - 50 mm ² , blue	IP1086466