


Data Sheet for Article: IP3212120-

Feed-through terminal block PT 10

Push-in connection, cross section: 0.5 mm² - 16 mm², AWG: 20 - 6, width: 10.2 mm, height: 49.5 mm, grey

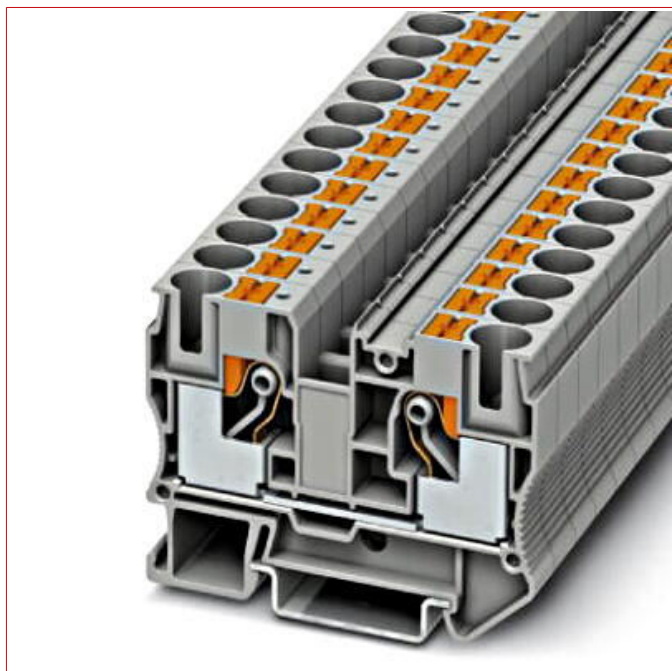

Technical Data

Netto depth (mm)	49,50
Net width (mm)	10,20
Net height (mm)	67,70
Net weight (kg)	0,03
EAN	4046356494816
Power loss (W)	1,82
Min. ambient temperature (°C)	-40
Max. ambient temperature (°C)	120
Basic Description	Terminal
System	Push-In
Series	PT
Version	Feed-through terminal
Max. cross section, solid wire (mm ²)	16
Max. cross section, flexible wire (mm ²)	10
Max. cross section, flexible wire with ferrule (mm ²)	10
Min. cross section, solid wire (mm ²)	0,50
Min. cross section, flexible wire (mm ²)	0,50

Technical Data - continued

Min. cross section, flexible wire with ferrule (mm ²)	0,50
Cross-section (mm ²)	10
Colour	Grey
Rated current (A)	57

Article Table

DESCRIPTION	Order No.
Feed-through terminal block PT 10	IP3212120
Push-in connection, cross section: 0.5 mm ² - 16 mm ² , AWG: 20 - 6, width: 10.2 mm, height: 49.5 mm, grey	
Optional Accessories	
End bracket CLIPFIX 15, to be snapped onto NS 15 DIN rail	IP3022263
Snap-on end bracket, color: gray	
End bracket CLIPFIX 35-5, for NS 35/7,5 or NS 35/15	IP3022276
Quick mounting end clamp, with marking option, width: 5.15 mm, color: gray	
End bracket CLIPFIX 35, for NS 35/7,5 DIN rail or NS 35/15	IP3022218
Quick mounting end clamp, with marking option, width: 9.5 mm, color: gray	
End bracket E/UK	IP1201442
End clamp, Width: 9.5 mm, Height: 35.3 mm, Length: 50.5 mm, Color: gray	
End bracket E/UK 1	IP1201413
End clamps, for supporting the ends of double-level and three-level terminal blocks, width: 10 mm, color: gray	
End bracket E/MBK	IP1401637
End clamp, width: 6.2 mm, color: gray	
End bracket E/MK 1	IP1421659
End clamp width: 6 mm, color: gray	
End bracket E/NS 35 N	IP0800886
End clamp, width: 9.5 mm, color: gray	
Zack marker strip ZB 10, blank	IP1053001
Strip, white, snap into tall marker groove, for terminal width: 10.2 mm, lettering field: 10.5 x 10.15 mm	
Zack marker strip ZB 10, consecutive numbers 1-10	IP10530141
Strip, white, snap into tall marker groove, for terminal width: 10.2 mm, lettering field: 10.5 x 10.15 mm	
Zack marker strip ZB 10, consecutive numbers 11-20	IP10530142
Strip, white, snap into tall marker groove, for terminal width: 10.2 mm, lettering field: 10.5 x 10.15 mm	
Zack marker strip ZB 10, consecutive numbers 21-30	IP10530143
Strip, white, snap into tall marker groove, for terminal width: 10.2 mm, lettering field: 10.5 x 10.15 mm	

Article Table

DESCRIPTION	Order No.
Optional Accessories	
Zack marker strip ZB 10, consecutive numbers 31-40	IP10530144
Strip, white, snap into tall marker groove, for terminal width: 10.2 mm, lettering field: 10.5 x 10.15 mm	
Zack marker strip ZB 10, consecutive numbers 41-50	IP10530145
Strip, white, snap into tall marker groove, for terminal width: 10.2 mm, lettering field: 10.5 x 10.15 mm	
Zack marker strip ZB 10, consecutive numbers 51-60	IP10530146
Strip, white, snap into tall marker groove, for terminal width: 10.2 mm, lettering field: 10.5 x 10.15 mm	
Zack marker strip ZB 10, consecutive numbers 61-70	IP10530147
Strip, white, snap into tall marker groove, for terminal width: 10.2 mm, lettering field: 10.5 x 10.15 mm	
Zack marker strip ZB 10, consecutive numbers 71-80	IP10530148
Strip, white, snap into tall marker groove, for terminal width: 10.2 mm, lettering field: 10.5 x 10.15 mm	
Zack marker strip ZB 10, consecutive numbers 81-90	IP10530149
Strip, white, snap into tall marker groove, for terminal width: 10.2 mm, lettering field: 10.5 x 10.15 mm	
Zack marker strip ZB 10, consecutive numbers 91-100	IP1053014H
Strip, white, snap into tall marker groove, for terminal width: 10.2 mm, lettering field: 10.5 x 10.15 mm	
Zack marker strip flat ZBF 10, blank	IP0809997
Strip, white, snap into flat marker groove, for terminal width: 10 mm, lettering field: 5.15 x 10 mm	
Zack marker strip flat ZBF 10, consecutive numbers 1-10	IP08100091
Strip, white, snap into flat marker groove, for terminal width: 10 mm, lettering field: 5.15 x 10 mm	
Zack marker strip flat ZBF 10, consecutive numbers 11-20	IP08100092
Strip, white, snap into flat marker groove, for terminal width: 10 mm, lettering field: 5.15 x 10 mm	
Zack marker strip flat ZBF 10, consecutive numbers 21-30	IP08100093
Strip, white, snap into flat marker groove, for terminal width: 10 mm, lettering field: 5.15 x 10 mm	
Zack marker strip flat ZBF 10, consecutive numbers 31-40	IP08100094
Strip, white, snap into flat marker groove, for terminal width: 10 mm, lettering field: 5.15 x 10 mm	
Zack marker strip flat ZBF 10, consecutive numbers 41-50	IP08100095
Strip, white, snap into flat marker groove, for terminal width: 10 mm, lettering field: 5.15 x 10 mm	
Zack marker strip flat ZBF 10, consecutive numbers 51-60	IP08100096
Strip, white, snap into flat marker groove, for terminal width: 10 mm, lettering field: 5.15 x 10 mm	
Zack marker strip flat ZBF 10, consecutive numbers 61-70	IP08100097
Strip, white, snap into flat marker groove, for terminal width: 10 mm, lettering field: 5.15 x 10 mm	
Zack marker strip flat ZBF 10, consecutive numbers 71-80	IP08100098
Strip, white, snap into flat marker groove, for terminal width: 10 mm, lettering field: 5.15 x 10 mm	
Zack marker strip flat ZBF 10, consecutive numbers 81-90	IP08100099
Strip, white, snap into flat marker groove, for terminal width: 10 mm, lettering field: 5.15 x 10 mm	
Zack marker strip flat ZBF 10, consecutive numbers 91-100	IP0810009H
Strip, white, snap into flat marker groove, for terminal width: 10 mm, lettering field: 5.15 x 10 mm	
End cover D-PT 10	IP3212057
End cover, length: 67.7 mm, width: 2.2 mm, height: 42.6 mm, color: grey	

Article Table

DESCRIPTION	Order No.
Optional Accessories	
Plug-in bridge FBS 2-10	IP3005947
Plug-in bridge, pitch: 10.2 mm, poles: 2, color: red	
Plug-in bridge FBS 5-10	IP3005948
Plug-in bridge, pitch: 10.2 mm, poles: 5, color: red	
Test plug MPS-MT	IP0201744
Test plug, color: silver	
Insulation sleeve MPS-IH RD	IP0201676
Insulation sleeve, color: red	
Screwdriver 1 x 5.5 (SZF 3-1.0X5.5)	IP1206612
Screwdriver, slot-headed, VDE insulated, size: 1.0 x 4.0 x 100 mm, 2-component grip, with non-slip grip	