

Data Sheet for Article: IUKTI6401-

Cooling unit 2000W, partially recessed mounting, Series DTI

400V, Installation depth=120mm, IP55, RAL 7035



SCHRACK-Info

General:

- Cooling unit for partially recessed mounting (=DTI)
- For door or side mounting
- Technical design with a standard controller
- Color: RAL 7035 (Light grey)

Green Series Cooling Unit:

- Highest energy efficiency for significant energy savings and operating cost reduction
- Significantly less refrigerant used
- UL listed according to UL 60335 for long-term planning even after 2024
- Large distance between intake and exhaust vents, safe circulation within the electrical enclosure due to long passage of air, therefore hot spots are eliminated
- Exceptional serviceability

IUKTI6401:

- Cooling performance: 2000W
- Rated voltage: 400V
- Type of connection: Spring-type terminal included with plug

- Installation depth: 120mm
- Degree of protection IP55: Towards the enclosure
- Degree of protection IP24: Towards the surroundings




Technical Data

Net width (mm)	485,00
Net height (mm)	1.537,00
Netto depth (mm)	278,00
Net weight (kg)	63,00
Min. ambient temperature (°C)	10
Max. ambient temperature (°C)	55
IP Rating	IP55
Protection class	I
Rated voltage	400V-AC
Product category	Cooling Unit
Cooling Performance (W)	2000


Technical Data for Cooling Unit 2000W, DTI Series, IUKTI6401

Data		Unit	IUKTI6401
Rated voltage +10%		Hz	AC 50 / 60
		V	400 / 460 3~
Cooling capacity according to EN 14511	A35/A35:	W	2000
	A35/A50:		1500
Power consumption	A35/A35:	W	727 / 911
Current consumption	A35/A35:		7.7
Energy efficiency ratio	ε _{ke}		2.75
Unimpeded airflow (free flow)	internal	m ³ /h	1175
	external	m ³ /h	945
Fuse protection T		A	4
Type of connection			Spring-type terminal included with plug
Ambient temperature		°C (°F)	From +10 to +55 (from +50 to +131)
Control range (adjustable)		°C (°F)	From +25 to +45 (from +77 to +113)
Refrigerant	R134a	g	500
Condensate management			Integrated condensate evaporation system with safety overflow
Degree of protection according to EN 60529	IP55		Towards the enclosure if used as intended by the manufacturer
	IP24		Towards the surroundings if used as intended by the manufacturer
Design	Housing		Galvanised sheet steel
	Cover		Electrostatically powder coated (200 °C)
Dimensions		[mm]	H=1537, W=485, D=278
Net weight		[kg]	63

Cooling Capacity Performance Curves

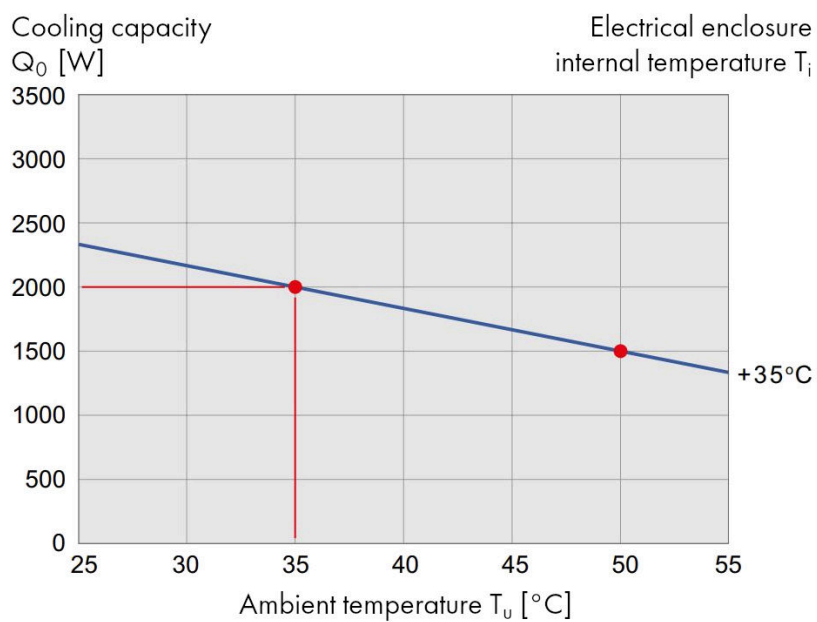

Dimensions and Cutout IUKTI6401

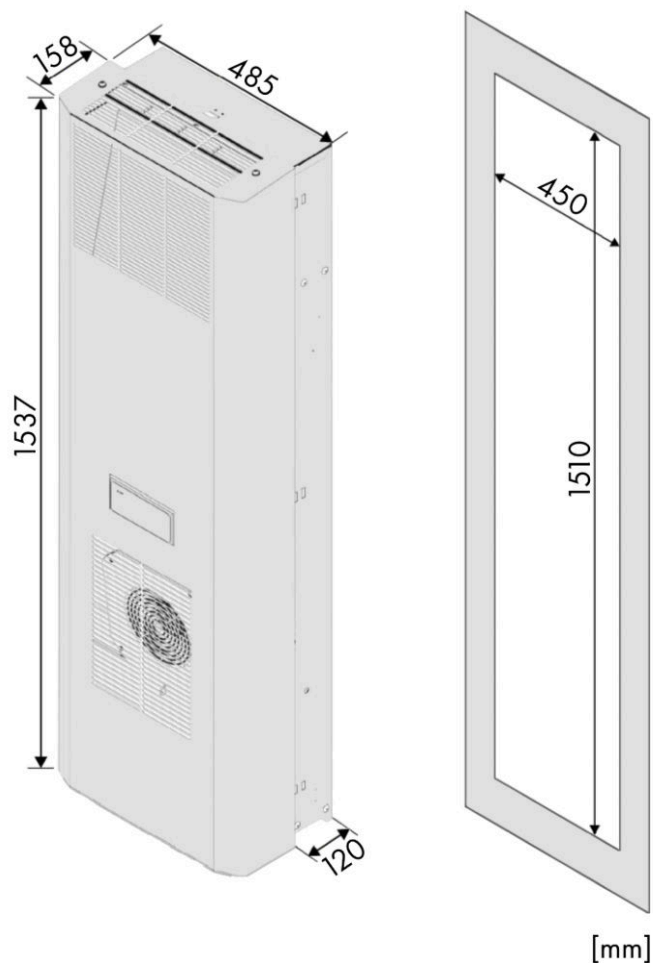

DESCRIPTION	Order No.
Cooling unit 2000W, partially recessed mounting, Series DTI 400V, Installation depth=120mm, IP55, RAL 7035	IUKTI6401