

Data Sheet for Article: IUKTS6301A

Cooling unit 1500W, outer mounting on the side, Series DTS

400V, IP55, RAL 7035



SCHRACK-Info

General:

- Cooling unit for outer mounting on the door or side (=DTS)
- Compact design for smaller enclosures or to cool hot spots
- Technical design with a standard controller
- Color: RAL 7035 (Light grey)

IUKTS6301:

- Cooling performance: 1500W
- Rated voltage: 400V
- Very high energy efficiency ratio (EER)
- Service friendly due to direct access to the PCB and the fans, thus 80 % shorter repair times
- Type of connection: Spring-type terminal included with plug
- Degree of protection IP55: Towards the enclosure
- Degree of protection IP34: Towards the surroundings


Technical Data

Net width (mm)	399,00
----------------	--------


Technical Data - continued

Net height (mm)	966,00
Netto depth (mm)	244,00
Net weight (kg)	45,00
Min. ambient temperature (°C)	15
Max. ambient temperature (°C)	55
IP Rating	IP55
Protection class	I
Rated voltage	400V-AC
Product category	Cooling Unit
Cooling Performance (W)	1500

Kennlinien Kühlleistung

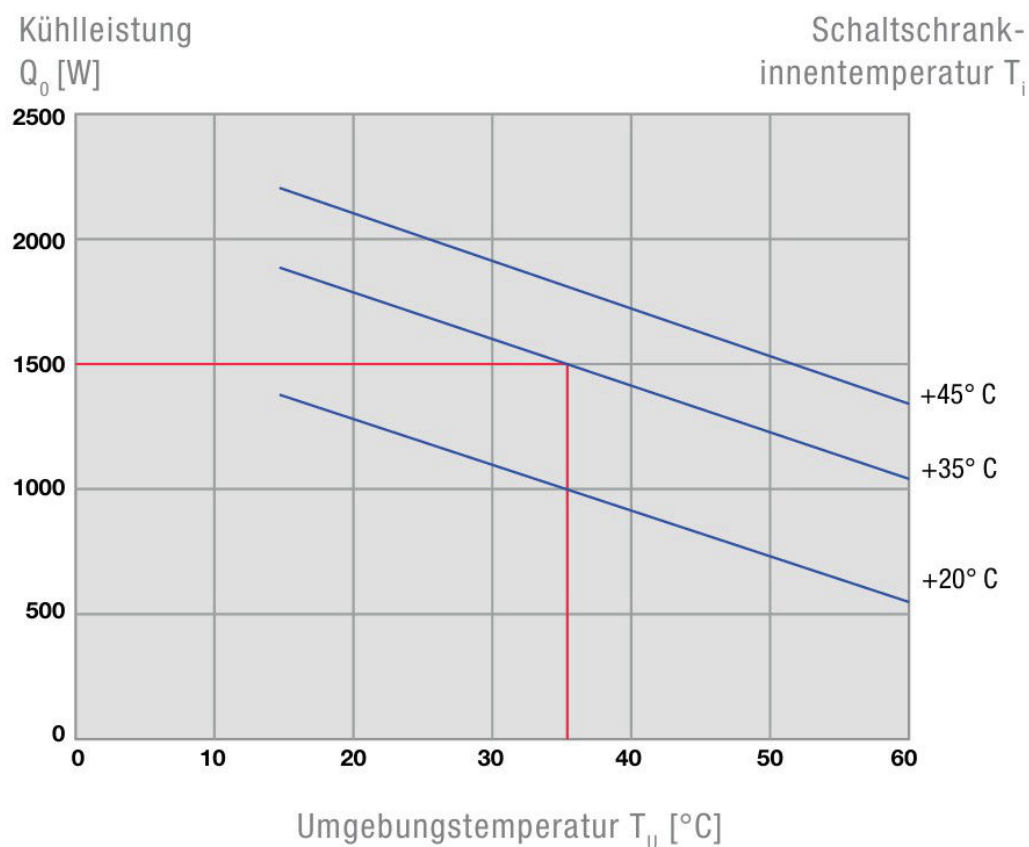

Dimensions and Cutout IUKTI6201A

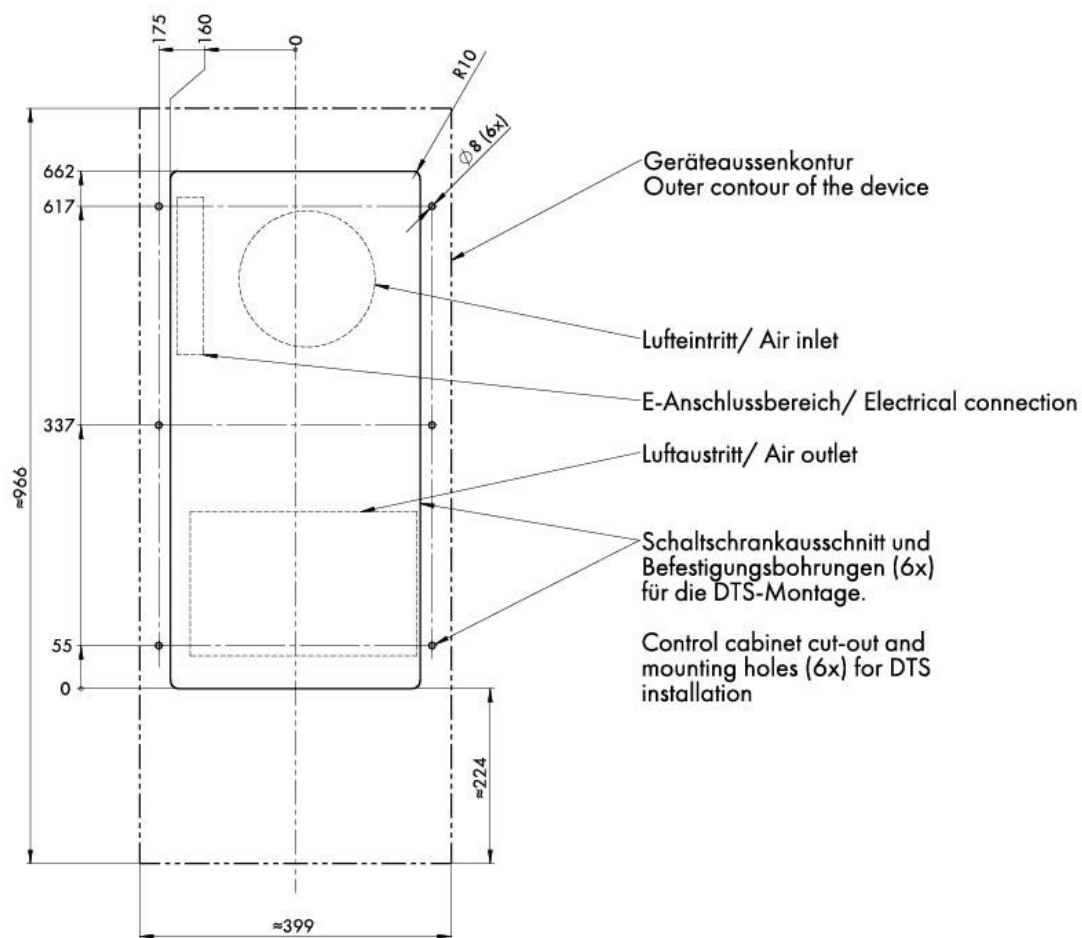

DESCRIPTION	Order No.
Cooling unit 1500W, outer mounting on the side, Series DTS 400V, IP55, RAL 7035	IUKTS6301A