


Data Sheet for Article: LI1008613-

OCULUS 2000-3000K 15W Dim-to-Warm

PHASE 100° messing

wall-mounted light round

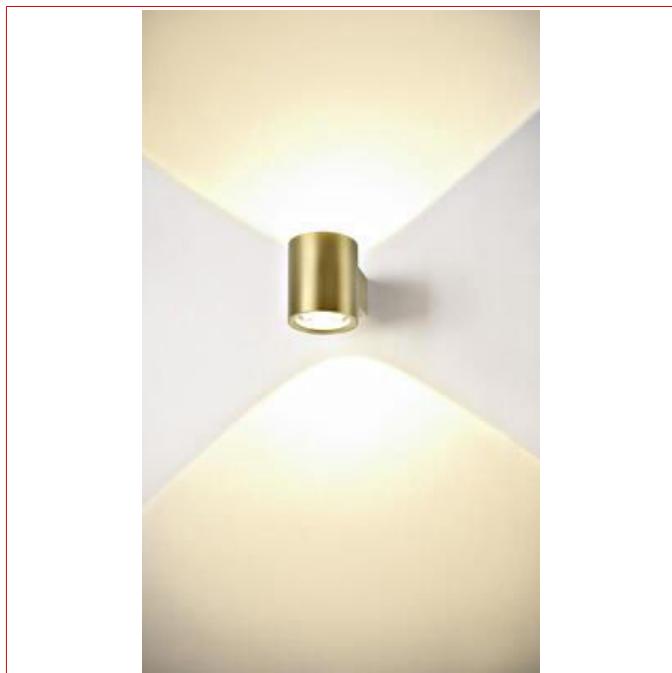

Technical Data

Net length (mm)	125,00
Net width (mm)	90,00
Net height (mm)	110,00
Net diameter (mm)	90,00
Net weight (kg)	0,85
Luminaire type	wall luminaires
Mounting	surface mounting wall
Colour	Brass
Material	Aluminum
Beam angle (°)	100
Operating voltage AC (V)	220-240
Operation current mA (mA)	700
Lamp holder	LED Platine
Power (W)	15
Light colour	ultra warm white warm white
Colour temperature (K)	2000-3000

Technical Data - continued

Colour rendering index (Ra)	≥90
Luminous flux (lm)	44 - 1110
Service life	30000
Dimmable	trailing edge dimmable (C)
Protection class	I
IP Rating	IP20
Diameter (mm)	90
ØxH mm	90x110
LxWxH mm	125x90x110

DESCRIPTION	Order No.
OCULUS 2000-3000K 15W Dim-to-Warm PHASE 100° messing wall-mounted light round	LI1008613